

DesignMax DM3P

pendant loudspeaker

Product Overview

With a coaxial two-way design, the 30-watt DM3P loudspeaker offers clear, intelligible highs and surprising low end for its size — along with premium aesthetics that complement any commercial sound installation. The DM3P loudspeaker features a coaxial 3.25-inch woofer and 0.75-inch tweeter mounted within the Dispersion Alignment system, delivering a frequency range of 75 Hz – 20 kHz. The DM3P features a recessed single-point suspension system for a sleek, attractive appearance. All models are available in black or white.



Key Features

Complete any commercial sound installation with 16 DesignMax loudspeakers to mix and match, including in-ceiling, surface-mount, and pendant form factors, subwoofers, high-SPL compression-driver models, compact low-profile models, and outdoor-rated options

Choose from three DM3 models — the in-ceiling DM3C, the surface-mounted, outdoor-rated DM3SE, and the sleek DM3P pendant loudspeaker

Deliver clear highs and surprising low end for their size with a coaxial two-way design — no DSP or EQ required. For even better sound, combine with select Bose Professional DSPs and amplifiers to enable Bose Professional loudspeaker EQ and SmartBass processing, which expands performance and response at any listening level

Ensure a consistent listening experience throughout the room with the Dispersion Alignment system, which matches the coverage of the woofer to the pattern of the tweeter

Blend with any room design with elegant form factors, minimum-bezel grilles available in black or white, and removable logos

Install easily with industry-standard accessories — all models include Euroblock connectors; in-ceiling models include plenum-rated backcans, tile bridges, and front-access audio wiring that makes installation and troubleshooting easier

Provide an open, attractive aesthetic with pendant loudspeakers featuring a recessed single-point suspension system that keeps hardware out of sight and can be used to hold and hide a service loop for easy access

Technical Specifications

SINGLE LOUDSPEAKER PERFORMANCE		
Frequency Response (-3 dB) ¹	85 – 20,000 Hz	
Frequency Range (-10 dB) ¹	75 – 20,000 Hz	
Nominal Coverage Angle (1 – 4 kHz)	130° conical	
Nominal Coverage (1 – 10 kHz)	130° conical	
	AES transducer test ⁴	Bose Professional extended-lifecycle test ⁵
Power Handling, Long-term Continuous	30 W	25 W
Power Handling, Peak	120 W	100 W
Sensitivity SPL / 1 W @ 1 m ²	84 dB	84 dB
Calculated Maximum SPL @ 1 m ³	99 dB	98 dB
Calculated Maximum SPL @ 1 m, Peak	105 dB	104 dB
Crossover	1.7 kHz (passive 2-way crossover)	
Loudspeaker EQ	Not required. Bose Professional EQ voicing and SmartBass available.	
Recommended High-Pass Protection	80 Hz with minimum 24-dB/octave filter	
Transformer taps	70V: 3, 6, 12, 25 W, bypass	
	100V: 6, 12, 25 W, bypass	

For additional specifications and application information, please visit BoseProfessional.com. Specifications subject to change without notice. 09/2024

TECHNICAL DATA

DesignMax DM3P

pendant loudspeaker

TRANSDUCERS	
Low Frequency	1 × 83 mm (3.25 in) woofer
High Frequency	1 × 20 mm (0.75 in) neodymium dome tweeter, coaxially mounted
Technology	Dispersion Alignment System, 127 mm (5 in) system diameter
Nominal Impedance	8 Ω (transformer bypass)
PHYSICAL	
Enclosure Material	Engineered plastics
Grille	Perforated steel, powder-coated finish, paintable ⁶
Logo	Rotatable, removable
Color	Black (RAL 9005), white (RAL 9003), paintable ⁶
Environmental	Indoor only
Safety Agency	UL Listed, UL 1480A, UL 2239 for suspension cable, NFPA 70 & NFPA 90A, CE-compliant
Operating Temperature Range	0 °C to 50 °C (32 °F to 122 °F)
Connectors	Euroblock 6-pin connector with loop-through, mounted on top. Accepts 18 AWG (0.8 mm ²) to 14 AWG (2.5 mm ²) size wire.
Suspension/Mounting	Each DM3P has one (1) suspension attachment point and one (1) safety cable attachment point. Included is one (1) 4.5 m (15 ft) adjustable suspension cable.
Product Dimensions (enclosure diameter × depth)	207 × 248 mm (8.2 × 9.8 in)
Cable Dimensions (diameter × length)	2 mm × 4.57 m (0.08 in × 15.00 ft)
Net Weight, Loudspeaker (single)	2.5 kg (5.5 lb)
Shipping Weight (pair)	7.00 kg (15.43 lb)
Included Accessories	Each DM3P includes one (1) adjustable suspension cable system, four (4) cable ties
Optional Accessories	Threaded rod adapter, conduit adapter, pendant suspension cable kit (pair)
PRODUCT CODES	
Black	841165-0110 DESIGNMAX DM3P PAIR BLK
Black (new)	841165-0120 DESIGNMAX DM3P PAIR BLK
White	841165-0210 DESIGNMAX DM3P PAIR WHT
White (new)	841165-0220 DESIGNMAX DM3P PAIR WHT
Threaded rod adapter (pair)	850571-0010 DESIGNMAX PENDANT THREADED ROD ADAPTER
Conduit adapter (pair)	854381-0010 DESIGNMAX PENDANT CONDUIT ADAPTER
Pendant suspension cable kit (pair)	852582-0010 PENDANT SUSPENSION CABLE KIT


Footnotes

1. Frequency response and range measured on-axis in whole-space environment with recommended EQ voicing.
2. Sensitivity measured on-axis in whole-space environment averaged 100 Hz – 10 kHz using recommended high-pass protection.
3. Maximum SPL calculated from sensitivity and power handling specifications, exclusive of power compression.
4. AES standard 2-hour duration with IEC system noise.
5. Bose Professional extended-lifecycle test using pink noise filtered to meet IEC268-5, 6-dB crest factor, 500-hour duration.
6. Choose a paint that is specifically designed for use with polypropylene (PP) plastics.


DesignMax DM3P

pendant loudspeaker


On-axis Response

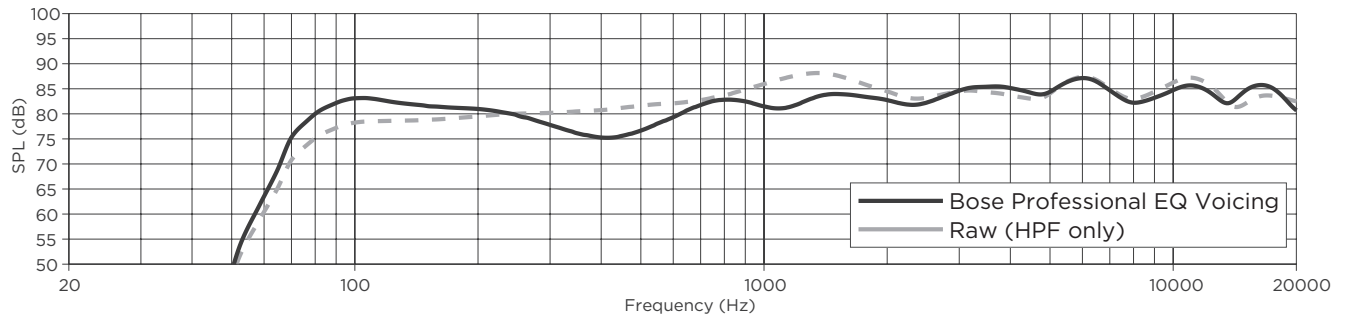

Impedance

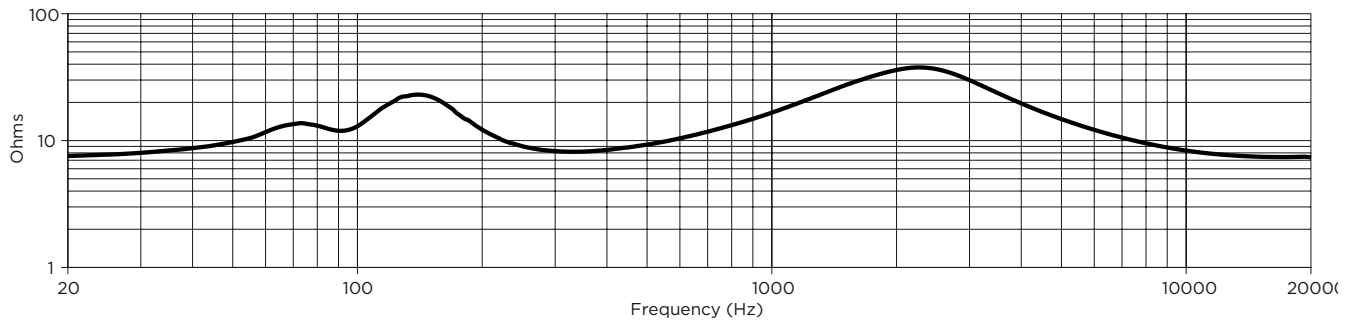

Beamwidth ⁷

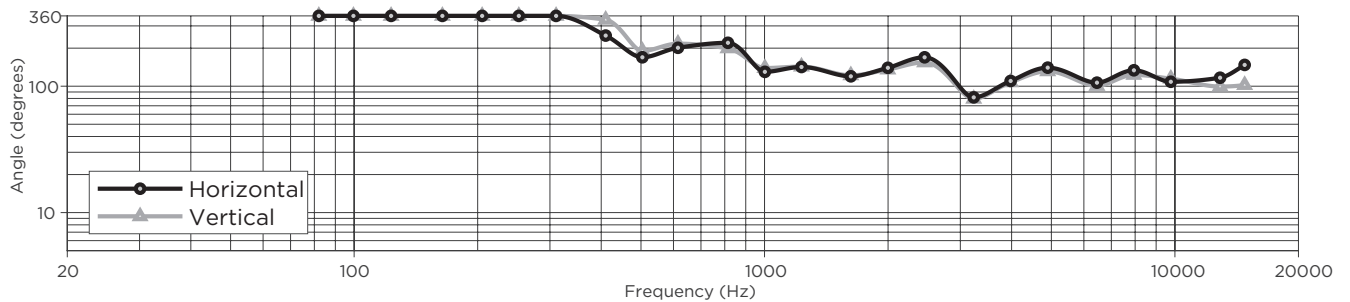


7. Measured in whole-space environment.

TECHNICAL DATA

DesignMax DM3P

pendant loudspeaker

Dimensions⁸

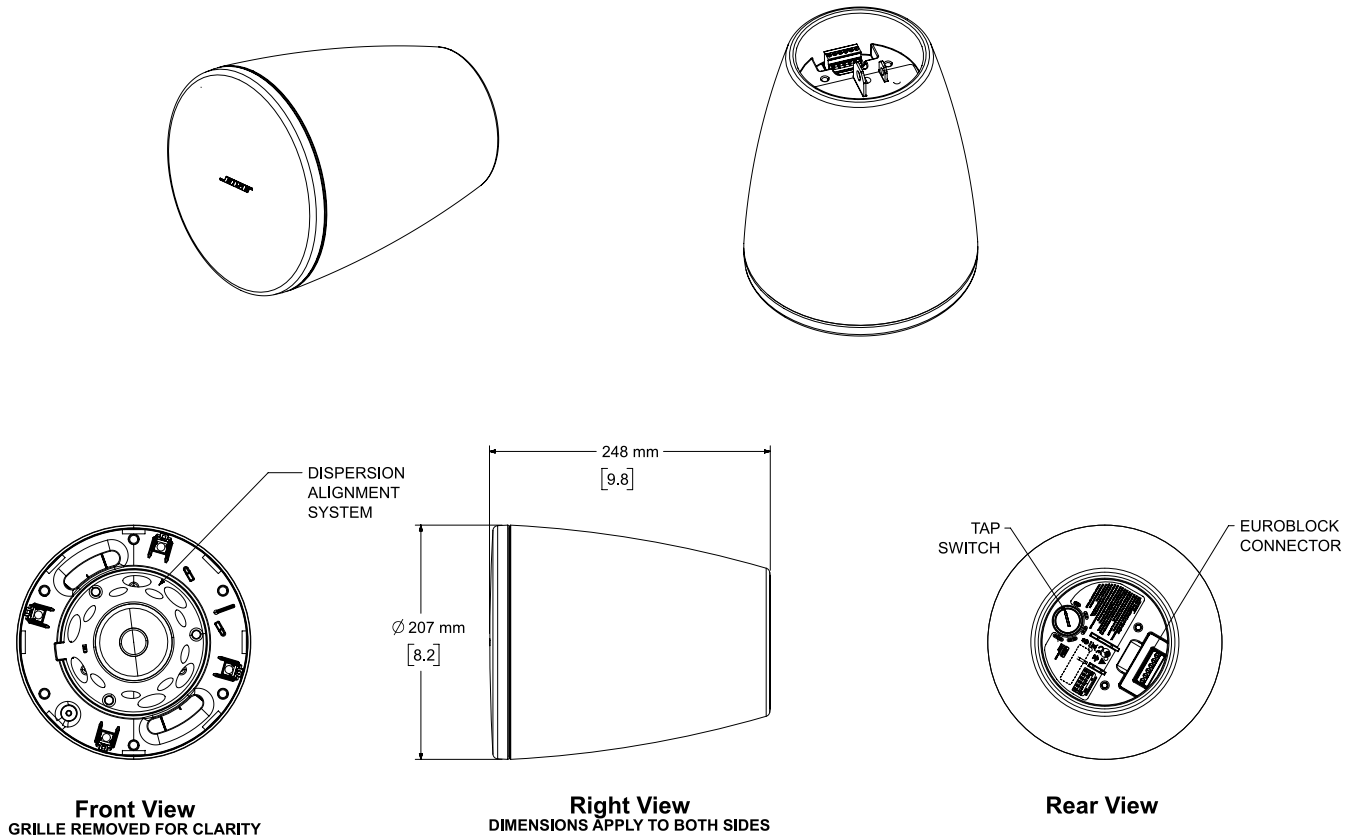

8. Dimensions are shown in millimeters over inches.

©2024 Transom Post OpCo LLC. All rights reserved. DesignMax and SmartBass are trademarks of Transom Post OpCo LLC. Bose is a trademark of Bose Corporation. All other trademarks are the property of their respective owners.

For additional specifications and application information, please visit BoseProfessional.com. Specifications subject to change without notice. 09/2024