




Features

- Built-in Full HD IP Camera
- Various display mode : Image or Video
- Support recording storage : up to 1TB TF card
- IP camera video output
- Web upload ads for playback
- Support Chrome, Firefox, Edge browser playback
- Linux operating system
- Support POE and DC 12V input

Dimension

Unit : mm

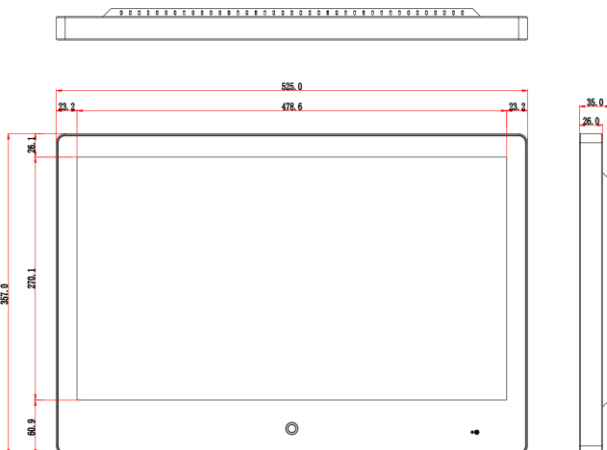

Model	22SPVM	
Monitor		
Screen diagonal dimension	21.5"	
Led Type	LED	
Screen Maximum Resolution	1920*1080	
Color Depth	16.7 Million colors	
Brightness	250 cd/m ²	
Monitor Aspect Ratio	16:9	
Contrast Ratio	1000:1	
Response Time(ms)	14ms	
View Angle H/V(degrees)	178°/178°	
Interface		
LAN	RJ-45 / 100MB	
TF card slot	1 (max. 1TB)	
USB	1 (FW upgrade)	
Terminal Block	Alarm in / out	1 / 1
	Relay	1 (NC or NO)
	Emergency in	1 (DC3~48V)
	Face detection out	1
	PIR out	1
	Motion detection out	1
12V out	DC12V	
Speakers	8 Ω 3 Watt/channel	
Wireless communication	WIFI	
IP camera		
Sensor	1/2.9", 2MP CMOS	
Encoding format	H.264 / H.265	
Effective Pixels	1920*1080	
Browser	Support for Chrome, Firefox and Edge	
Lens	3.3mm Fixed Lens	
Integration protocol	ONVIF Profile S, API	
Recording Resolution	1920x1080@30FPS	
Motion Detection	Support	
DVR Storage	up to 1TB TF card	
EMMC/Flash	8GB	
DDR/RAM	1GB	
Function		
Image settings	chroma, contrast, brightness, sharpness, saturation Wide dynamics, backlight compensation, strong light suppression, 3D noise reduction	
Video	record normally / trigger motion detection / face detection / alarm input to record	
Advertising	full-screen or half-screen image or video ads (less than 1GB in size)	
Warning information and logo	The warning information supports warning pictures and warning voices, logo picture can set the size and position of the picture	
OSD Languages	English, Chinese, Japanese	
Others		
VESA Mounting Pattern	100 x 100	
DC/POE	DC:12V±10% POE:38-56V	
Power- Watts(on and standby)	< 25W	
Net weight	4.78KG	
Gross Weight	6.2KG	
Operating Temperature	0°C ~ 40°C	
Storage Temperature	-20°C ~ 60°C	
Operating Humidity	10 ~ 85%	
Size	525 x 357 x 35mm	

※ Design and specifications are subject to change without notice

GS&A Contact no. GS-03F-0152X