

Product End of Life Instructions

Easy UPS 3S

Easy 3S 10-40 kVA (400V) and 10-20 kVA (208V) IEC 3 phase UPS






Potential disassembly risks

Hazard of electric shock, explosion or arc flash

The UPS contains an internal energy source. Hazardous voltage can be present even when disconnected from the utility/mains supply. Before installing or servicing the UPS system, ensure that the units are OFF and that utility/mains and batteries are disconnected. Wait five minutes before opening the UPS to allow the capacitors to discharge.



End of Life Instructions

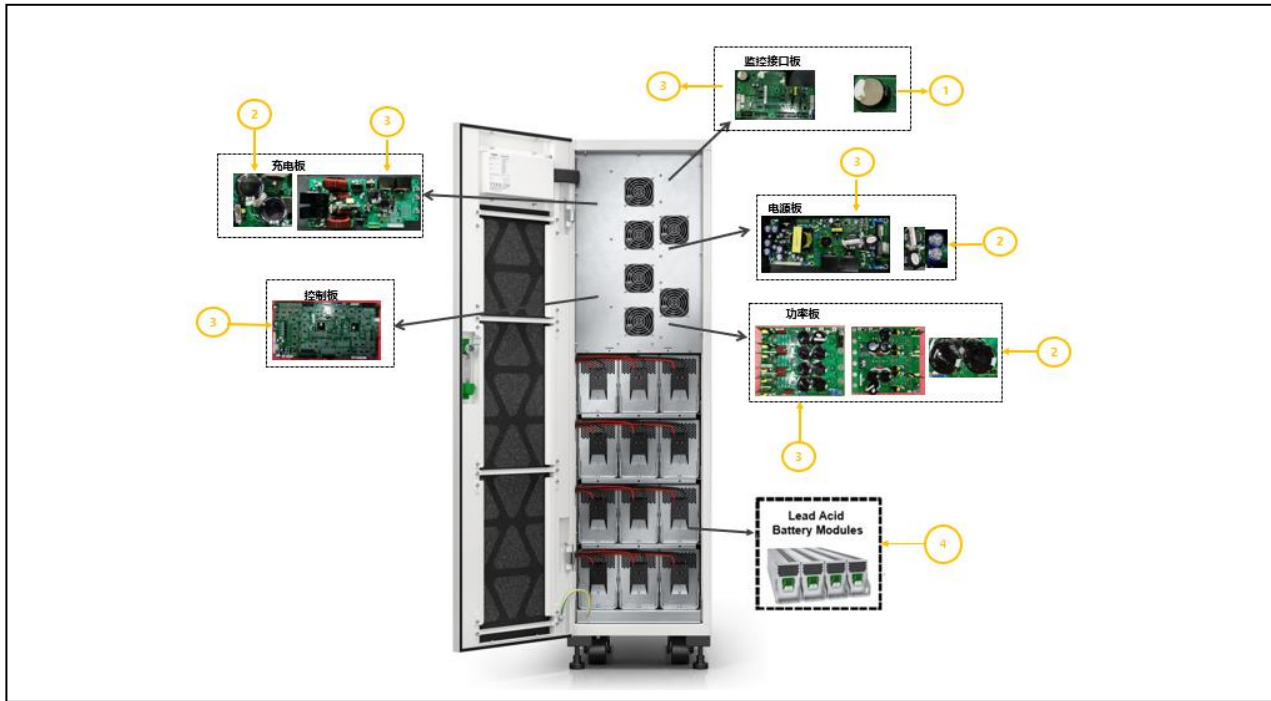

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Batteries (Lithium metal coin batteries)*	2.98	1 x coin batteries
To be depolluted	2	Electrolytic Capacitors*	1104.65	25 x large electrolytic capacitors
To be depolluted	3	Electronic Board > 10cm ²	5079.74	17 X PCBs >10cm ²
To be depolluted	4	Battery (Lead-acid)*	324000	12 X lead-acid battery

*Not all batteries, capacitors and PCBAs are pictured here. Power batteries for the UPS system are in separate battery cabinet(s) not addressed by this document.



Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	The Schneider Electric Easy UPS 3S is an easy-to-install, easy-to-connect, easy-to-use, and easy-to-service 10-40 kVA 3 phase UPS ideal for small and medium businesses, data centers, and other mission critical applications.
Product reference	E3SUPS20KHB

Total representative product mass	125475.4 g
Representative product dimensions	1400 mm x 380 mm x 840 mm
Date of information release	03/2022



Additional information

Legal information	The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
Recyclability potential	81%	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS
 Country Customer Care Center
<http://www.schneider-electric.com/contact>
 35, rue Joseph Monier
 CS 30323
 F- 92506 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 896 313 776 €

www.schneider-electric.com

ENVEOLI2111020_V1

Published by Schneider Electric

© 2019 - Schneider Electric – All rights reserved

03/2022