
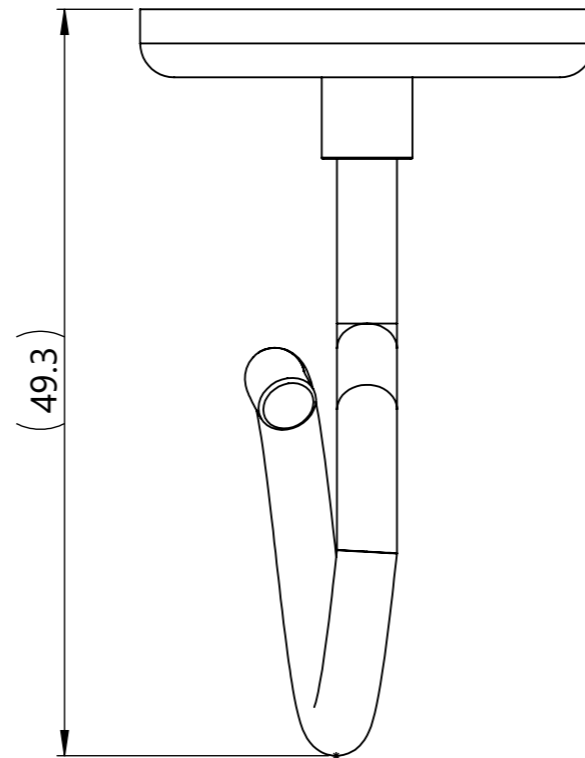


Isometric View
Scale 3 : 2

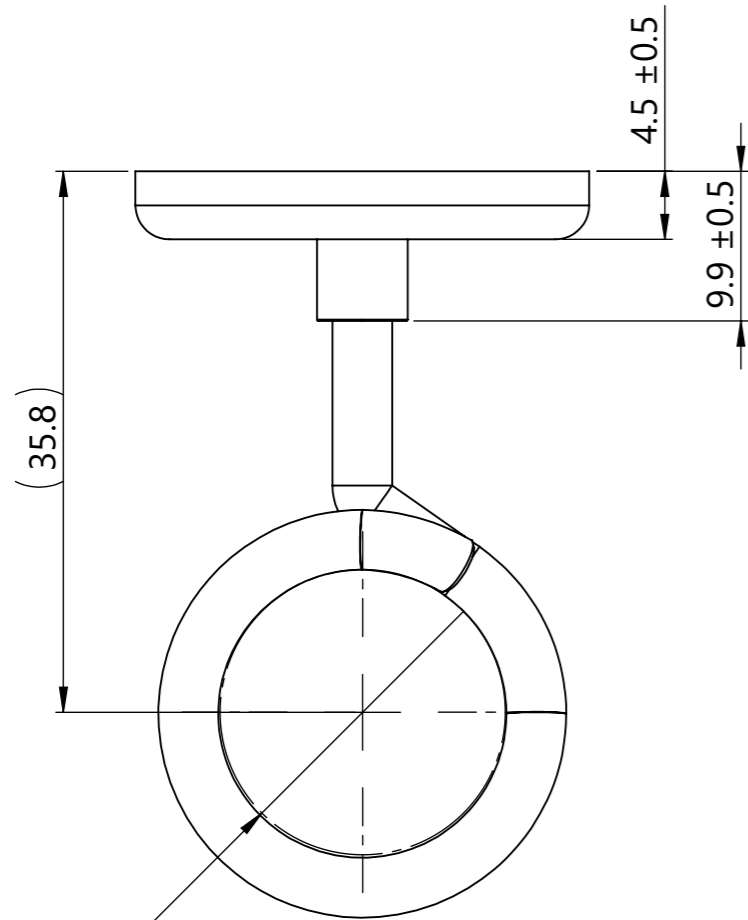

- Reference:
1. Material: See chart
 2. Material color: See chart
 3. Min. Vertical Pull Force: 178N (40 lbf)
 4. Magnets are very strong. Handling them with care is necessary to prevent personal injuries, property damages and magnet damages

UL Listing		
ANSI/UL 1565	Positioning Devices TYPE 21 E64139	178N (40 lbf) Vertical Pull
	CAN	
All testing performed using 3mm min. thick 1008-1010 steel plate		

Global Part Description	Item No.	Qty.	Material	Finish	Color
MAGBR40S-NDFEB45/ST-ML	1	1	Steel	Zinc	Silver
	2	1	NdFeB N45M	NiCuNi	
			Steel	Zinc	

Revision level			Revision Record		
Drawing	State	Part	ECN 017485 - Initial Release		
00.0	Design Release	-			
Changed	Date (YYYY/MM/DD)				
Johnson	2023/04/18				
Approved	Date (YYYY/MM/DD)				
Toll	2023/04/20				

The copyright of this drawing is reserved by HellermannTyton.

All drawing revision are stored in CAD PDM database

Drawn: Johnson, Date: 2023/04/18

Approved: Toll, Date: 2023/04/20

HellermannTyton
www.HellermannTyton.com

Title: Magnetic Bridle Ring, Small, 3/4 in. diam. ring, 40 lb pull force

Scale: 2:1

Global Project Number: 23-0069

Format: A3

Sheet: 1/1

Drawing-No: 23-0069-001-CSU