





ASSEMBLY INSTRUCTION

NC*FRX & NC*MRX | XLR Cable Connector

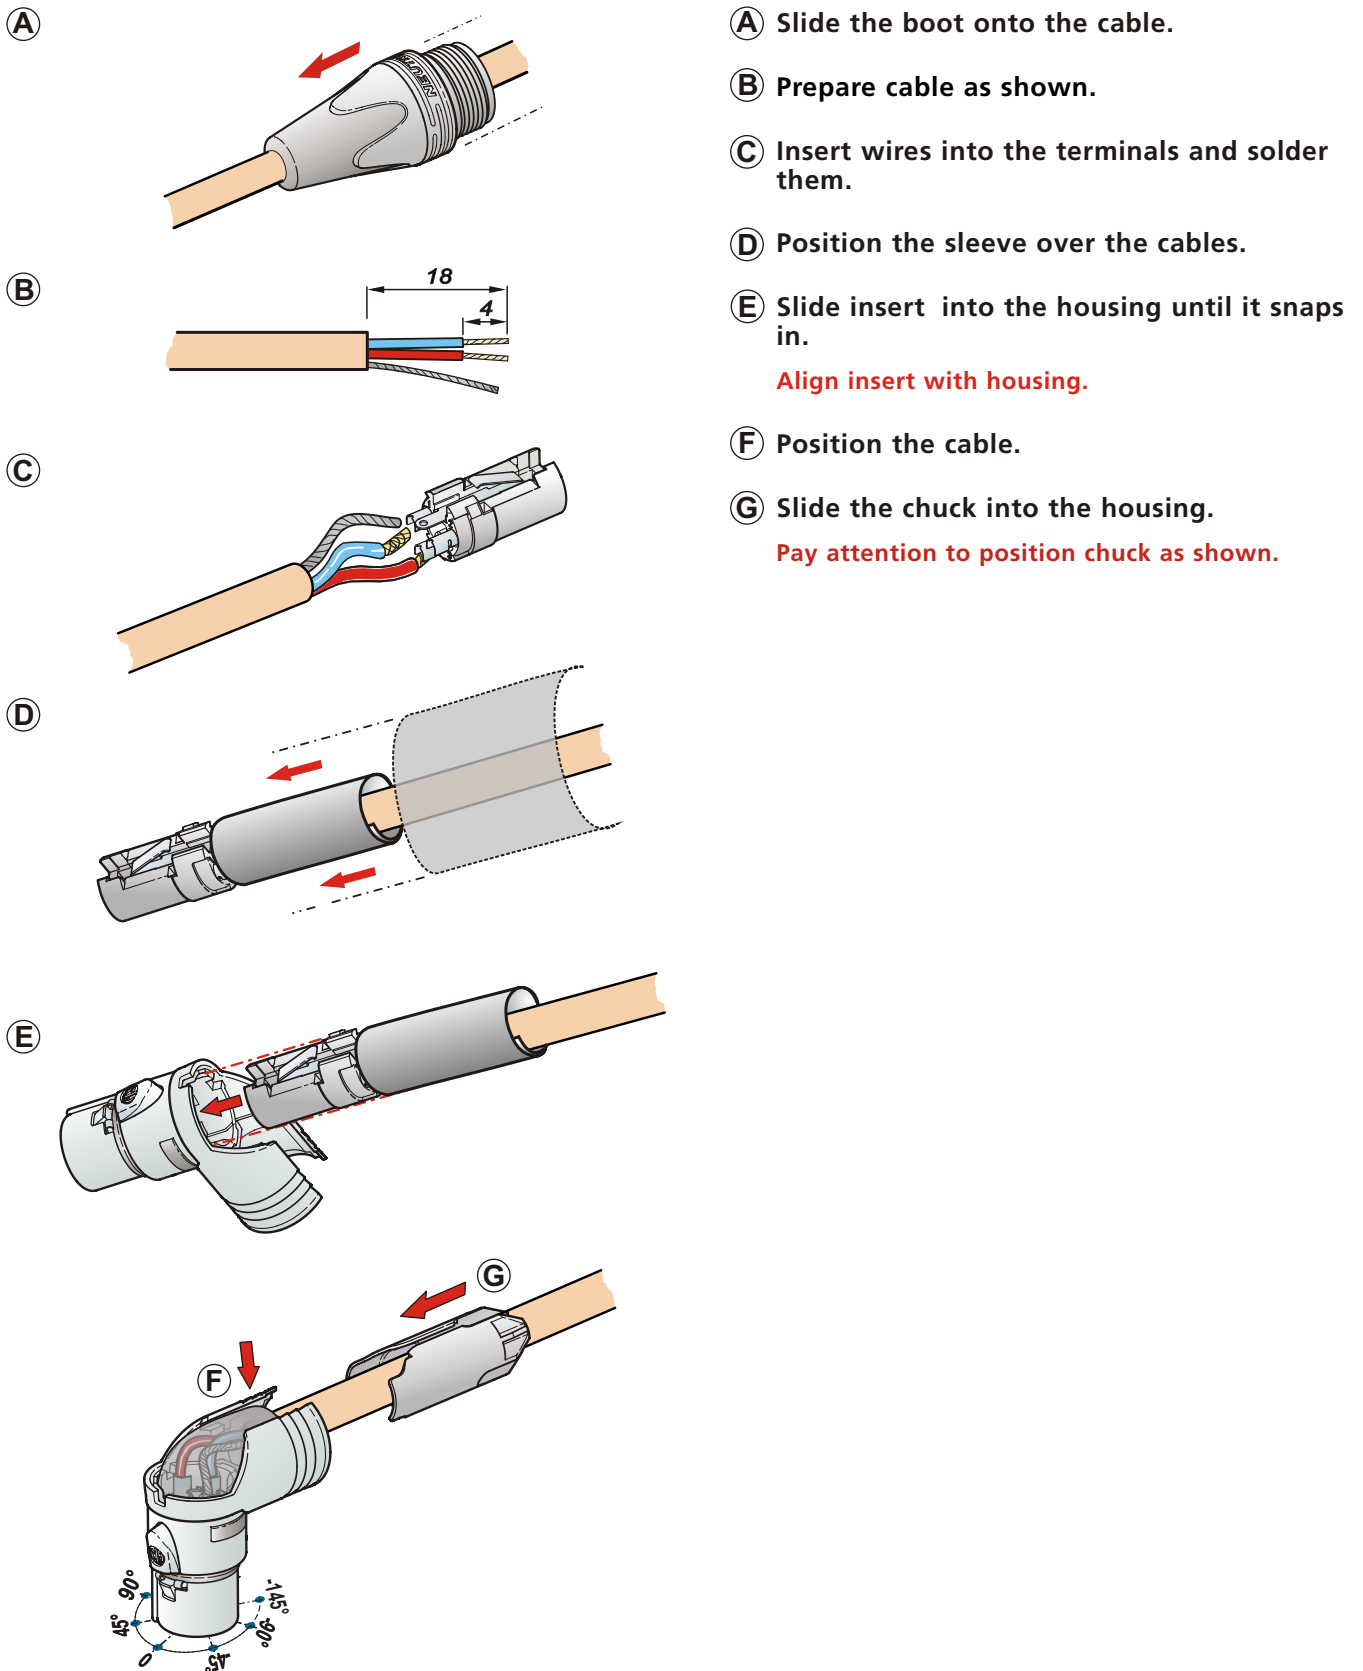

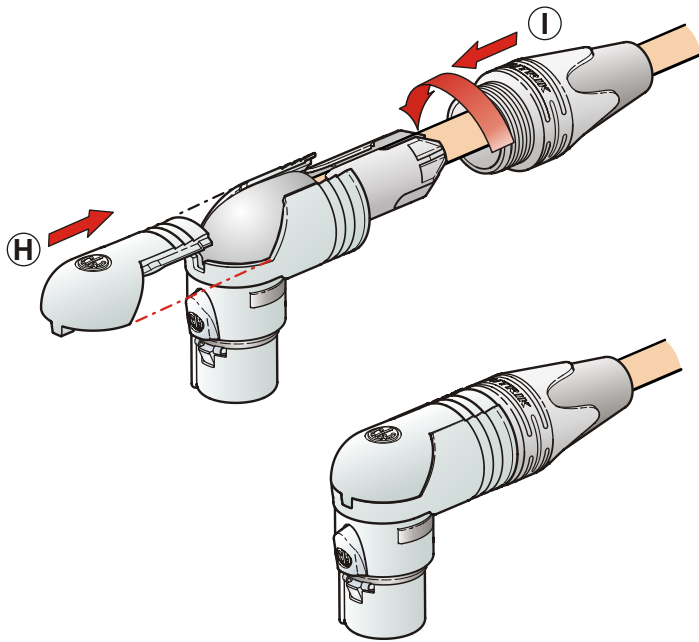


H Position the cover.

Before placing the cover choose the orientation of cable outlet by turning housing.

I Finish the assembly by turning the bushing onto the connector.

Disassembly of the insert

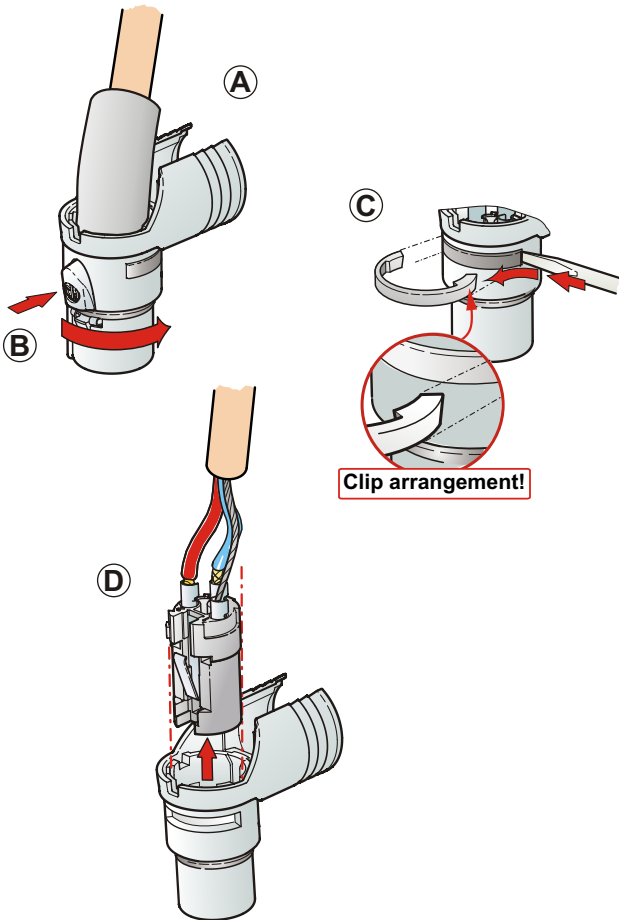

A Remove cover and chuck.

B Push latch and turn housing approx. a half turn until housing can be separated.

C Lift the locking clip by help of a screw driver.

D Remove insert.