

Zinc die-cast. For AC • MCI-A • HCF steel and aluminum cable • Flexible metal conduit steel and aluminum (regular and reduced wall) • MCI cable • Continuous corrugated aluminum • AC90 • MC-PCS Cable

SNAP-TITE® and SNAP2IT® products have been tested and listed by UL in accordance with UL's ground fault requirements. For additional information see page 8.

**NO TOOLS!**

- Safe and fast installations
- Saves about 17 seconds per fitting!
- Competitively priced

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	KO SIZE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	DIM D	DIM E	CABLE RANGE
4110ST	00728	1/2	50	500	1.963	1.252	1.000	2.075	-	.525 - .705
414110ST	00729	1/2	25	100	2.500	2.386	.943	1.701	.950	(2) .525 - .640
4141107ST	22095	3/4	25	100	2.615	2.386	.943	1.701	1.200	(2) .525 - .690




4110ST



414110ST



4141107ST

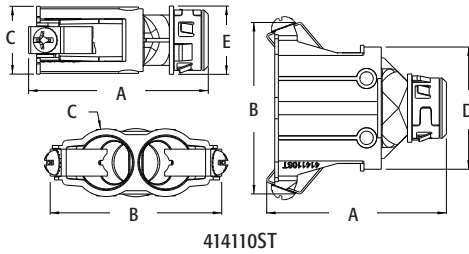

CSA Listed with anti-short bushing ONLY. Refer to chart on page E-27 for list of cable types. See page E-30 and E-31 for MCI-A cable ranges. **PATENTED.**