

Non-Metallic Rainbox™

Rain-tight, labor-saving solution to installing a fan or fixture exposed to the elements, inside or outside.

FEATURES AND BENEFITS

- Oversized medallion accommodates canopies up to 7" in diameter
- Available in white or bronze
- UL/CSA Listed, rain-tight assembly
- NEC code compliant. Completely sealed against water, dirt, and pests—no exposed wiring

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION/ CU. IN.	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	DIM D
FBC4225BR	09677	Bronze, non-metallic 21.0 cu. in. box	1	5	7.500	2.718	5.390	2.059
FBC4225W	09679	White, non-metallic 21.0 cu. in. box	1	5	7.500	2.718	5.390	2.059




FBC4225BR



FBC4225W




E170558

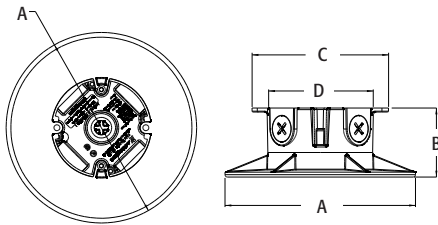

Refer to chart on page R-24 for load ratings and number of single conductors. **PATENTED.**

FBC4225W & FBC4425BR INCLUDES...

21.0 cu. in. RAINBOX™, medallion, (2) 1/2" to 3/4" NPT reducing bushings, (4) plugs, (2) #8 x 1-1/4" screws for medallion, and (2) #12 x 4" screws for fan/fixture bracket.



INSTALLATION INSTRUCTIONS



1
Install fitting with conduit. Seal unused openings with supplied plugs. Mount box to structural member.



2
Pull wire (not included).



3
Attach medallion to box with supplied #8 x 1-1/4" screws.



4
Attach fan/fixture bracket to structural member using supplied screws (#12 x 4"). Connect wires and install fan/fixture per manufacturer's instructions.

