

# COMBO SMOKE & CARBON MONOXIDE ALARM

# ADI PRO

0E-SMKCODTCR is a 10-year combination smoke and carbon monoxide (CO) detector powered by hardwired 120VAC with 2 AA battery backup. This single and/or multiple station alarm can be interconnected with up to 18 compatible units. It features early warning and voice alert, as well as a smart silence control to temporarily silence nuisance alarms. This product conforms to UL217 9th Ed., UL 2034 4th Ed., ULC S531 4th Ed. and CSA 6.19. For residential applications.



## FEATURES

Photoelectric smoke sensor and electrochemical CO sensor provide early warning and minimize nuisance alarms

10-year product life with end-of-life notification


Interconnect up to 18 compatible units (hardwire)

Easy installation with quick connect wiring harness and mounting bracket

Includes convenient TEST/SILENCE button to test alarm operation and silence nuisance alarms

5-Year Warranty

### ALARM OVERVIEW

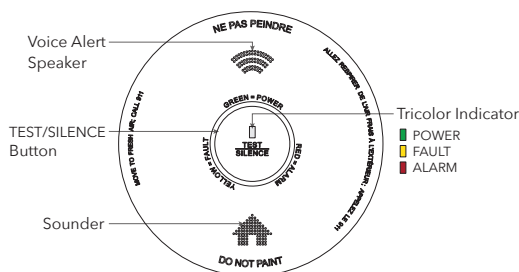

**AC Power:** GREEN LED constantly lit

**Smoke Alarm:** RED LED flashes, accompanied by 3 LONG BEEPS and voice "Fire!", "Incendie!", repeating

**CO Alarm:** RED LED flashes, accompanied by 4 QUICK BEEPS with voice "Warning! Carbon Monoxide!", "Attention! Monoxyde de carbone!", repeating

**Low Battery:** YELLOW LED flashes 1x every 40 sec. with voice, "Low battery" "Pile faible"

**End-of-Life:** YELLOW LED flashes 2x every 40 sec. with voice "End of life" "Fin de vie"

### Product Specifications

**PART #:** 0E-SMKCODTCR

**UPC:** 840049310360

**Smoke Sensor:** Photoelectric

**CO Sensor:** Electrochemical

**Audible Alarm:**  $\geq$  85dB at 10 ft. (3m)

**Power Supply:** 120VAC 60Hz, 30mA max

**Battery Backup:** Two 1.5V AA batteries

**Interconnection:** Up to 18 compatible units (12 smoke alarms and 6 non-smoke alarms)

**Dimensions:**  $\varnothing$ 6.1" x 1.65" ( $\varnothing$ 155 x 41.8mm)

**Weight:** 0.7 lbs. (320 $\pm$ 10g)

**Temp. Range:** 40°F to 100°F (4.4°C to 37.8°C)

**Humidity Range:** 10-95% RH non-condensing



CONFORMS TO UL STD.  
UL217 9TH ED & UL 2034 4TH ED  
CERT. TO CAN/CSA STD.  
ULC S531 4TH ED AND CSA 6.19

For more information contact your ADI Sales person or visit [adiglobal.com/adiexclusivebrands](http://adiglobal.com/adiexclusivebrands)

