

Model KSB14 base





The KS series allows mix-and-match versatility achieving various shelf sizes (base + sides), while providing cost efficient shipping and storage. Model KSB14 is a vented 14"D base. Add 2U, 3U or 4U sides to create a rackmount shelf.

NOTE: BASE AND SIDES ORDERED SEPARATELY.

FEATURES

- Material: 16-gauge certified U.S. steel
- Finish: Smooth black powder epoxy finish
- Depth: 14"
- Width: 17.50" (without shelf sides)
- Hardware: L-brackets and mounting hardware ships with base
- Load Capacity: 50 or 70 lbs. depending on configuration (see chart)
- Origin: Made in the U.S.A.
- A&E Specifications: The rackmount shelf shall consists of Lowell vented base model KSB14 and sides model _____ (ordered separately). The shelf shall be 16-gauge certified U.S. steel with smooth black powder epoxy finish. When assembled, the shelf shall measure _____ (2, 3, 4) rack units and have overall depth of 14". Load capacity shall be _____ (50 lbs., 70 lbs.). The shelf shall be manufactured in the U.S. A.

OPTIONS

• **KTSB:** Clamping bracket secures equipment at the top. Includes mounting hardware.

Model summary

rackmount shelf.

Order sides separately for complete

BASE					
Model No.	Description	Depth	Width		
KSB14	Base for KS series rack shelf	14"	17.50"		

SIDES (REQUIRED) - ordered separately					ASSEMBLI (field assemb	
Model No.	Description	Depth	Width	RU	Width (base + sides)	L (L
KSE2	Sides (1 pr) for KS series rack shelf	14"	.88"	2U	19"W	
KSE3	Sides (1 pr) for KS series rack shelf	14"	.88"	3U	19"W	
KSE4	Sides (1 pr) for KS series rack shelf	14"	.88"	4U	19"W	

ASSEMBLED SHELF (field assembly required)				
Width (base + sides)	Load Capacity (base + sides)			
19"W	50 lbs			
19"W	70 lbs			
19"W	70 lbs			


OPTIONAL

KSTB Clamping bracket to help secure equipment to KS series shelf

Dimension = inches; 1U = 1.75




Dimensions are inches and [mm] unless stated otherwise.

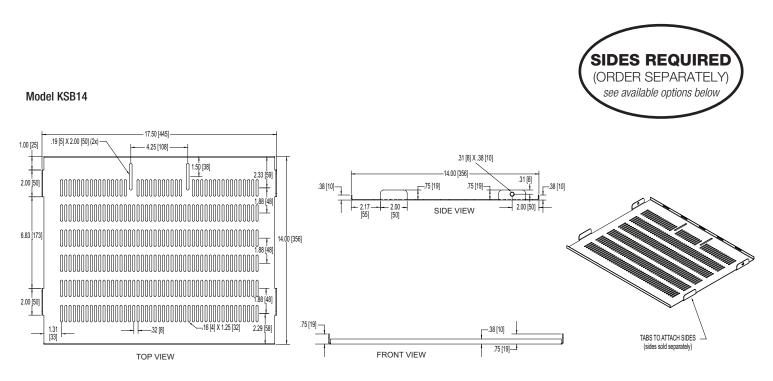


SIDES (ordered separately)

Model KSE2



Model KSE3





Ð