

Keyscan K-PCR 125kHz Mobile-Ready Reader

A mobile smartphone access control solution



Features and benefits:

- Heartbeat technology alerts if signal is interrupted
- Models function with Keyscan Mobile Credentials
- On board beeper to generate audible tones or sound a local "door-held-open" alert
- Wiegand output
- Versatile mounting options with 2-in-one, mullion or single gang, electrical box mounting application
- Impressive read range
- Durable, weather-resistant construction for reliable operation even in harsh environments
- Limited lifetime warranty

Keyscan K-PCR 125kHz mobile-ready reader


Keyscan K-PCR reader is a robust, affordable reader with a host of features and a sleek modern finish.

This reader is compatible with Keyscan Present3 and facility lockdown functions. It also features multiple mounting options, heartbeat intelligence, and anti-tamper capability for unrivaled performance and dependability.

For added convenience the K-PCR is compatible with Keyscan K-BLE or K-MOB smartphone mobile credentials in addition to traditional proximity credentials, such as clamshell cards, fobs and key tags.

The K-PCR reader is the ideal choice for Keyscan access control systems with 125 kHz proximity reader requirements.

The Keyscan K-PCR reader offers a wide range of features and complies with the legacy Wiegand protocol. K-PCR offers value-add features and can be ordered to support several proximity card, fob or tag technologies.

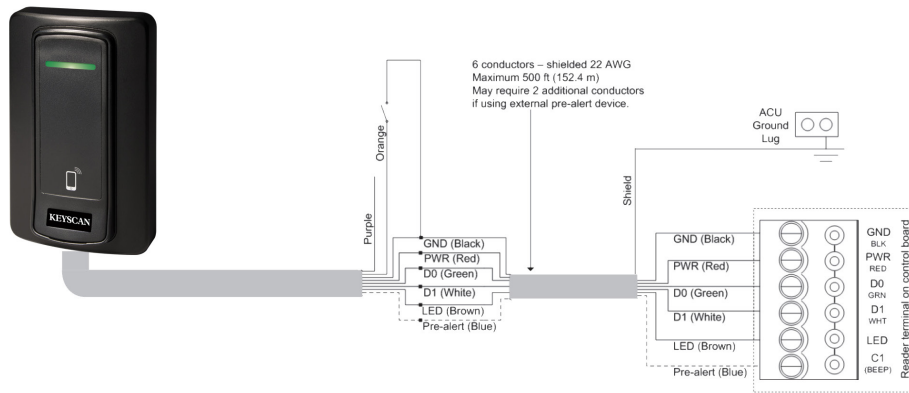

Specifications

Size	Mullion: 1.7" W x 4.7" H x 1.2" D (43 mm x 119 mm x 30 mm) Switch Plate: 3" W x 5.1" H x 1.2" D (76 mm x 130 mm x 30 mm)
Frequency	125 kHz (proximity) and 2.4 GHz (BLE)
Read Range	Physical Credentials: Up to 4 inches (51 mm) Mobile Credentials: Up to 15 feet (4.6 m)
Current Draw	60 mA typical, 90 mA peak @ 12 VDC
Voltage	+8 to 14 VDC
Cabling	24 AWG minimum, multiconductor stranded with an overall foil shield
Operating Temperature	-31° F to 150° F (-35° C to +66° C)
Interface	Wiegand (26-bit and custom formats) or OSDP
Audio Tone	Beeper included standard
Indoor & Outdoor Installation	Electronics sealed in weather- and tamper-resistant epoxy potting
Credentials	Functions with: Keyscan CS125-36 clamshell Farpointe PSM-2P-H; PSK-3-H; PDT-1-H HID-C1325; HID-C1386; HID C-1391; and PROXKEYIII Keyscan K-MOB & K-BLE (mobile credentials)
Warranty	Limited Lifetime

© 2024 dormakaba Canada, Inc. Information on this sheet is intended for general use only.

Any questions? We would be happy to advise you.

Contact us at: 1 888 539 7226