


# Emergency Panic Stations



**Model KR-1**  
Latching Push Button  
With Key Reset

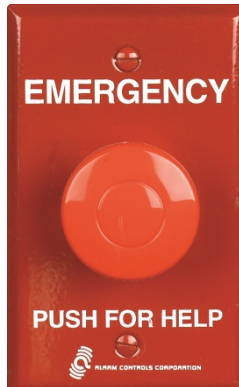

**Model PBM-1-4**  
Momentary Push Button  
Mounted on a Red Plate



**Model PBL-1-L2**  
Latching Push Button  
With Illuminated Button

- Single Gang 430 Stainless Steel Wallplate
- Normally-Open and/or Normally-Closed Contact Pairs
- Contacts Rated 10A @ 35 VDC or 120VAC
- Temperature Range -25°C to +70°C
- Switch Connection via Screw Terminals
- Switch Depth 2" Behind Plate, 2.5" for Illuminated Models
- UL Listed Components
- Weather-Proof to IP65 Standard, KR models to IP40 Standard
- Large 1.5" Diameter Red Mushroom Button
- Custom Plate Marking Available

MODEL	CONTACTS	PLATE	ILLUMINATION <small>(not available on KR Models)</small>	GUARD RING
<u>PBM</u> MOMENTARY OPERATOR	<u>1</u> 1 N/O PAIR and 1 N/C PAIR	<u>1</u> 302 STAINLESS	<u>L1</u> 6 VDC	<u>GR</u>
<u>PBL</u> LATCHING OPERATOR	<u>2</u> 2 N/O PAIRS	<u>2</u> WHITE	<u>L2</u> 12 VDC	
<u>KR</u> LATCHING OPERATOR KEY RESET	<u>3</u> 2 N/C PAIRS	<u>3</u> IVORY	<u>L3</u> 24 VDC	
	<u>4</u> 1 N/C PAIR	<u>4</u> RED	<u>L4</u> 120 VAC	
	<u>5</u> 1 N/O PAIR	<u>5</u> 1.75" STAINLESS		
		<u>6</u> 1.75" RED		

PBL-	1-	4-	L2-	GR
------	----	----	-----	----

Part Number Example -

Latching push button with one N/O and one N/C contact pair on a red plate, 12VDC illumination and guard ring.



ASSA ABLOY, the global leader  
in door opening solutions