


Welcome to Binary™. We have engineered and tested this product thoroughly to ensure its compatibility and reliability with all HDMI® certified sources and displays. Keep the following pointers in mind when installing your B8 cables.

- The attached USB connector provides power for the cable at 5V/1A. **The cable will not function unless powered.**
- Use the included power adapter if an existing USB port does not provide at least 5V/1A of power.

Using the Power Adapter

1. Plug the USB connector into the power adapter.
2. Plug the power adapter into a power source.

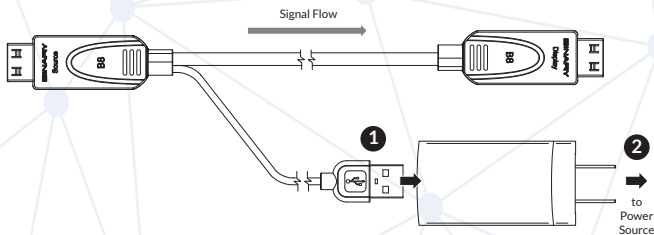

- The B8 cable is a single directional cable from the source to the display. Ensure the cable is connected in the correct orientation for proper function.
- Extreme bends and pulling forces should be avoided to prevent damage to the glass optical fibers within the cable.

Troubleshooting:

Troubleshooting	
Issue	Resolution
No video/audio or poor video/audio quality	Check connections on both source and display ends
	<ul style="list-style-type: none">• Confirm connections are secure in HDMI ports.• Confirm cable is in the correct orientation per the illustration on page 1.
	Check USB connection
	<ul style="list-style-type: none">• If plugged into an existing USB port, the device may not supply enough power: try a different USB port.• Attach to supplied power adapter and plug into a powered AC outlet.
Audio Return Channel (ARC) not working	This cable is not compatible with ARC technology

BINARY®

Tech Support: (866) 838-5052

Rev: 180626-1745 © 2018 Binary