


# TempoA4

## Occupancy Alert System



Altronix TempoA4 is designed to alert management when unauthorized loitering occurs in up to four (4) secure rooms. TempoA4 has built-in LINQ Technology to remotely monitor, control and report power/diagnostics.

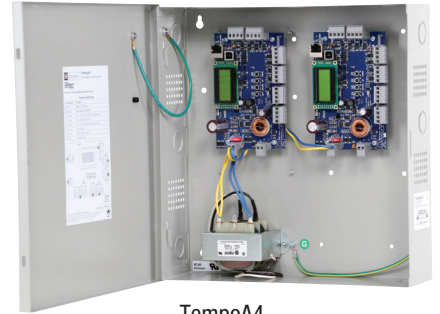

TempoA4

### Specifications

#### Input Power Options

AC	115VAC, 60Hz, 1A (with line cord and transformer)
Trigger	Four (4) Door Sensor/Trigger inputs Four (4) Strobe "Steady" Trigger Inputs Four (4) Strobe "Flash" Trigger Inputs Four (4) "Panic/Emergency" Trigger Inputs

#### Output Options:

12VDC/2.5A, 24VDC/1.25A (30W) Four (4) Strobe Switched Power Outputs Eight (8) Aux. Power Outputs
---

#### Timer

- Alphanumeric LCD display simplifies programming.
- EE Prom memory protects against loss of programming due to power failure
- Momentary and/or Latching Events

#### Battery Charging

Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

#### Indicators (LED)

AC Power (Green)	Input voltage is present
DC Output (Red)	12/24VDC is on
Trigger	Active

#### LINQ Technology:

- Remote network management allows for device reset and monitoring
- Provides local and/or remote access to critical information via LAN/WAN
- Email and Windows Dashboard Alert notifications report real-time diagnostics
- Event log tracks history

#### Physical and Environmental

- 1/2" and 3/4" combination knockouts
- Enclosure accommodates up to two (2) 12VDC/7AH batteries

#### Dimensions (H x W x D)

Enclosure:	13.5" x 13" x 3.25" (342.9mm x 330.2mm x 82.6mm)
Shipping:	15" x 13.875" x 4.75" (381mm x 352.4mm x 120.6mm)

#### Weight (approx.)

Product:	8.2 lb. (3.7 kg)
Shipping:	9.2 lb. (4.2 kg)

#### Temperature






Operating	0°C to 49°C (32°F to 120°F).
Storage	- 20°C to 70°C (- 4°F to 158°F)

Relative Humidity	85% +/- 5%
BTU/Hr. (approx.):	28 BTU/Hr.

#### Lifetime Warranty

**Dimensions and Drawing**

Dimensions (H x W x D approximate)  
13.5" x 13" x 3.25" (342.9mm x 330.2mm x 82.6mm)

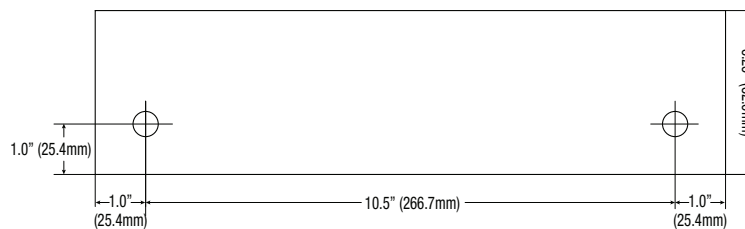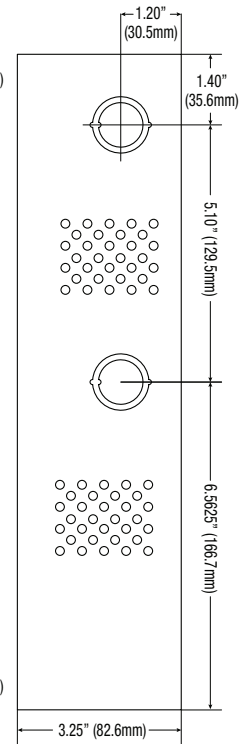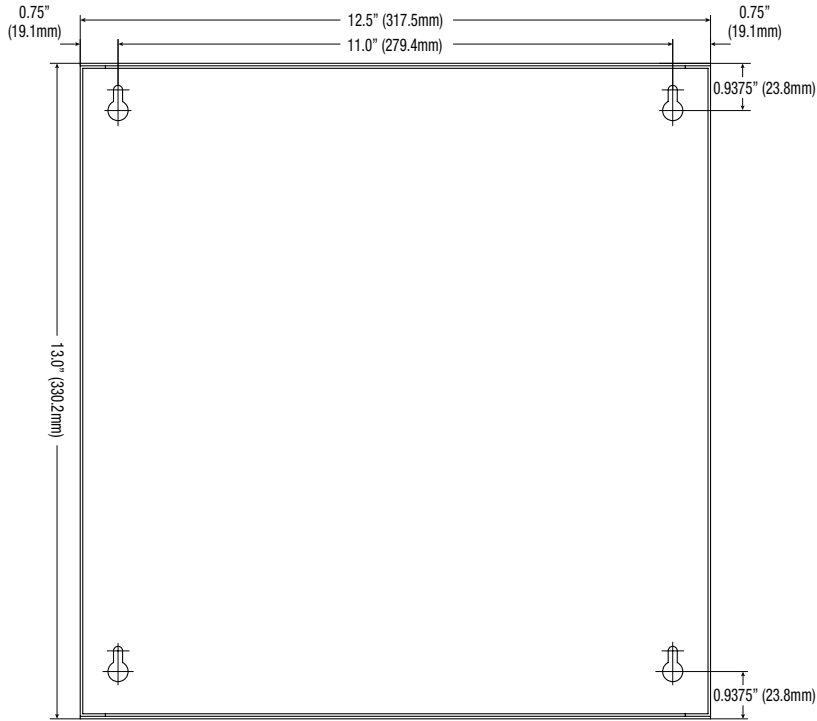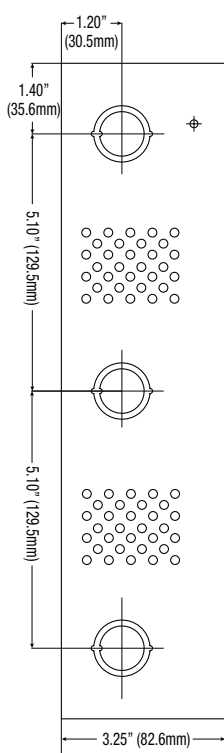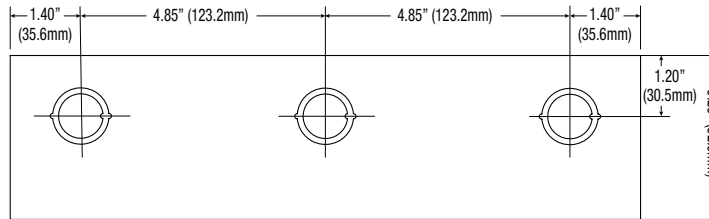

**Lifetime Warranty**