

technical information

The Opti-Core® patch cords with CS connectors support network applications in main, horizontal and equipment distribution areas and are available in plenum (OFNP) and low smoke zero halogen (LSZH) rated jacket materials. Fiber patch cords with CS connectors are available OM4 and OS2 fiber types to meet the demands of 100G, 200G and 400G interconnect applications.



application

Provide interconnect and cross-connect of applications in entrance facilities, telecommunications rooms, data centers, at the desk and network applications to interconnect pre-terminated cassettes in main distribution, horizontal distribution, and equipment distribution areas.

construction

| | | |
|---------------------------------|--|--------|
| Fiber count: | Duplex (2-fiber) Round | |
| Cable jacket ratings: | Plenum (OFNP) Low Smoke Zero Halogen (LSZH) | |
| Fiber types: | Singlemode: OS2 Multimode: OM4 | |
| Connector types end 'A': | CS, Uniboot LC | |
| Jacket color: | OS2: | Yellow |
| | OM4: | Aqua |
| Connector types end 'B': | CS | |

Note: For hybrid cords, the CS connector is always on End B.

physical properties

| | |
|-------------------------------------|---------------------------|
| Cable outside diameter (OD): | 2.0mm |
| Connector cable retention: | 50N @ 0°C 19.4N @ 90°C |
| Connector durability: | 500 cycles |
| Bend radius Min: | 20mm |

environmental properties

| | |
|--|---------------|
| Storage and shipping temperature: | -40°C to 70°C |
| Operating and installation temperature: | 0°C to 60°C |

optical properties

| | |
|---------------------------------------|---|
| Connector insertion loss (IL): | Optimized: 0.15dB max (OM4) 0.25dB max (OS2) |
| | Ultra: 0.10dB max (OM4) |
| Connector return loss (RL): | 26dB min (OM4) 55dB min (OS2) |

standards

| | |
|---|--|
| Meets or exceeds | IEC 60332-1-2 IEC 60332-3-24 IEC 60754-1 IEC 60754-2 IEC 61034-2 TIA-604-19 (FOCIS-19) TIA 568.3-C.3 ISO/IEC 11801 Ed 3 |
| Restriction of Hazardous Substances (RoHS) Compliance: | All patch cord components meet the requirements of Directive 2002/95/EC. |

Opti-Core® Fiber Optic Patch Cords (CS to CS, CS to LC)

part number

Example: F92RPZLNZNF003 = Fiber OS2, 2-fiber, 2mm cable, plenum rated, CS to CS, optimized IL, 3 feet

| | | | | | | | | | | | | | | | |
|-----------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|
| Character | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 |
| Example | F | 9 | 2 | R | P | Z | N | Z | N | O | N | F | 0 | 0 | 3 |

1 – Fiber Product

F = Fiber

2 – Fiber Type

Z = OM4

9 = OS2

3 – Fiber Count

2 = 2 fibers

4 – Cable Type

R = Round 2.0mm

5 – Jacket Type

L = LSZH (Low Smoke Zero Halogen)

P = OFNP (Plenum)

6 – Connector Type – End A

U = LC Duplex Uniboot

Z = CS Duplex Connector

7 – Connector Variant

1 = UPC

2 = APC

N = No variant

8 – Connector Type – End B

Z = CS Duplex Connector

9 – Connector Variant

N = No variant

10 – Performance/Construction

O = Optimized IL (A-B)

N = Ultra (A-B)

11 – Other

N = No variant

12 – Unit of Length

M = Meters


F = Feet

13, 14, 15 – Length

001-050

Note: For hybrid cords, the CS connector is always on End B.

fiber optic patch cord detail

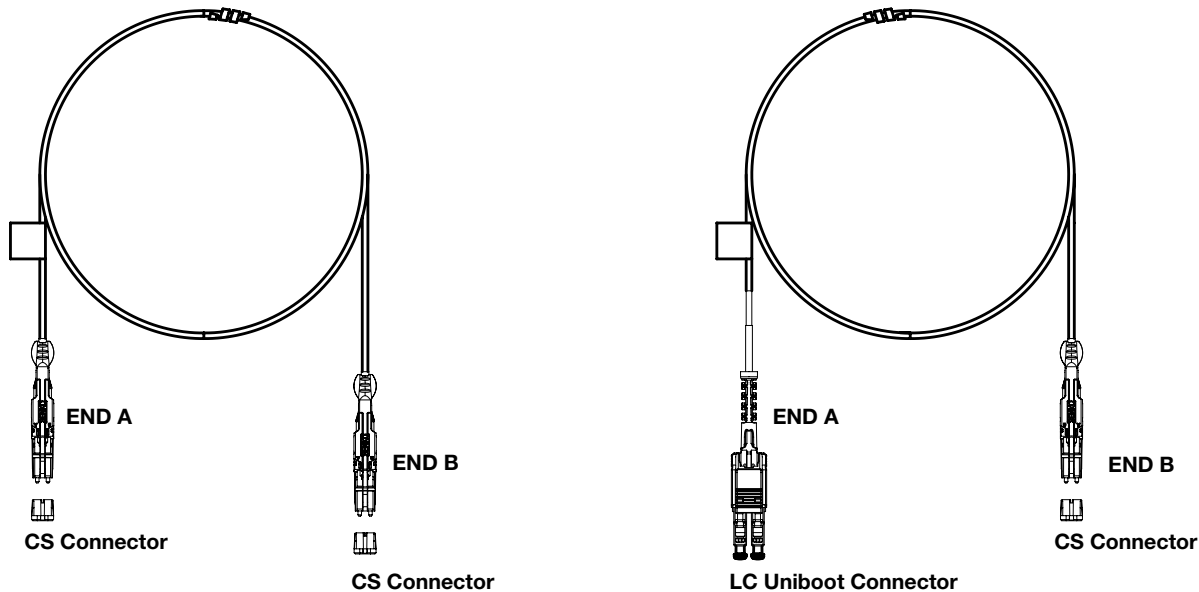

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

PANDUIT®

© 2021 Panduit Corp.
ALL RIGHTS RESERVED.
FBSP203--WW-ENG
9/2021