18/2 PLENUM RATED, SHIELDED SECURITY & CONTROL CABLE

18 AWG 2 Stranded Conductors, Shielded

Ratings	CMP, CL3P, FT6
Approvals	ETL Listed

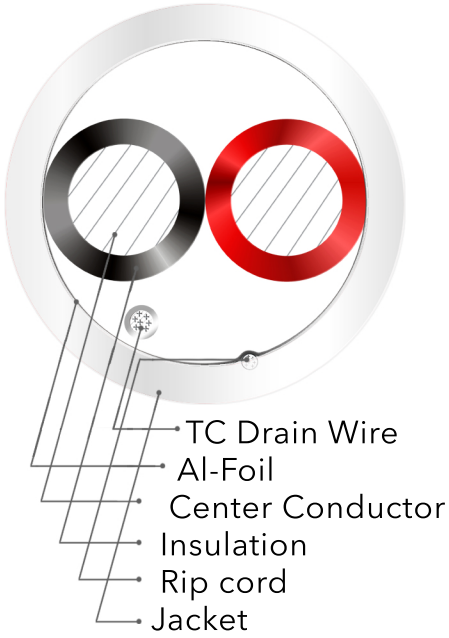

Construction

Conductor	18 AWG 19 Strand Bare Copper
Conductor Count	2
Insulation	Plenum PVC (0.007" nom.)
Insulation Colors	Black, Red
Lay Length	2.32" nom.
Shielding	Aluminum Foil/Mylar w/24 AWG Tinned-Copper Drain
Rip Cord	Yes
Jacket	Plenum PVC (0.015" nom.)
Overall Diameter	0.156" nom.
Print Legend	ADI PRO P/N RN-XXXXXXX OXYGEN FREE 2C18 SHIELDED 3180662 C(ETL)US CL3P 75C, CMP FT6 RoHS LOT#XXXX MMDDYY XXXXFT

Properties

Operating Voltage	300 Volts max.
DC Resistance	6.66 Ohms/1000' at 20°C
Capacitance	59.3 pF/ft. nom.
Temperature	-20°C to 75°C
Flame Rating	NFPA 262 (Plenum); CSA C22.2 No. 2556 (FT6)
RoHS Compliant	Yes
Country of Origin	CHINA

PART#	COLOR	LENGTH	BOX
RN-92SP101	OFF WHITE	1000FT	EXPRESS BOX
RN-82SR510	OFF WHITE	500FT	EXPRESS BOX

For more information contact your ADI Sales person or visit adiglobal.com/adiexclusivebrands