

18/4 RISER RATED, SHIELDED SECURITY & CONTROL CABLE




18 AWG 4 Stranded Conductors, Shielded

Ratings CMR, CL3R, FT4
 Approvals ETL Listed

Construction

Conductor 18 AWG 19 Strand Bare Copper
 Conductor Count 4
 Insulation PVC (0.011" nom.)
 Insulation Colors Black, Red, White, Green
 Lay Length 3.9" nom.
 Shielding Aluminum Foil/Mylar w/ 24 AWG Tinned-Copper Drain
 Rip Cord Yes
 Jacket PVC (0.017" nom.)
 Overall Diameter 0.203" nom.
 Print Legend ADI PRO P/N: RN-xxxx OXYGEN FREE
 4C18 SHIELDED 3180662 C(ETL)US CL3R 75C,
 CMR FT4 ROHS LOT#xxxx xxxxFT

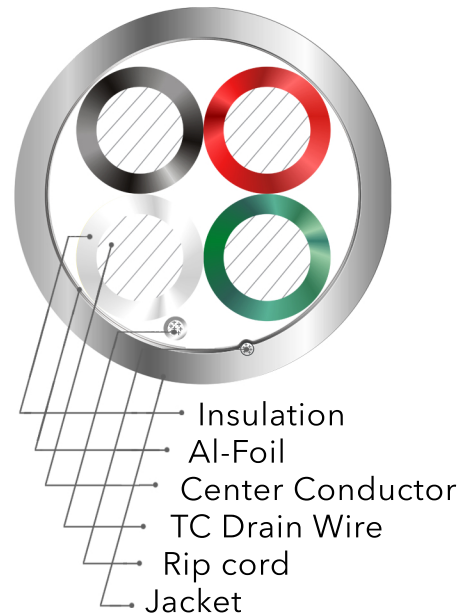

Properties

Operating Voltage 300 Volts max.
 DC Resistance 6.66 Ohms/1000' at 20°C
 Capacitance 36.3 pF/ft. nom.
 Temperature -20°C to 75°C
 Flame Rating UL 1666 (Riser);
 CSA C22.2 No. 2556 (FT4)
 RoHS Compliant Yes
 Country of Origin CHINA

PART#	COLOR	LENGTH	BOX
RN-87SR109	GREY	1000FT	EXPRESS BOX
RN-87SR509	GREY	500FT	EXPRESS BOX



For more information contact your ADI Sales person or visit adiglobal.com/adiexclusivebrands