


18/2 RISER RATED, UNSHIELDED SECURITY & CONTROL CABLE



18 AWG 2 Stranded Conductors, Unshielded

Ratings CMR, CL3R, FT4
Approvals ETL Listed

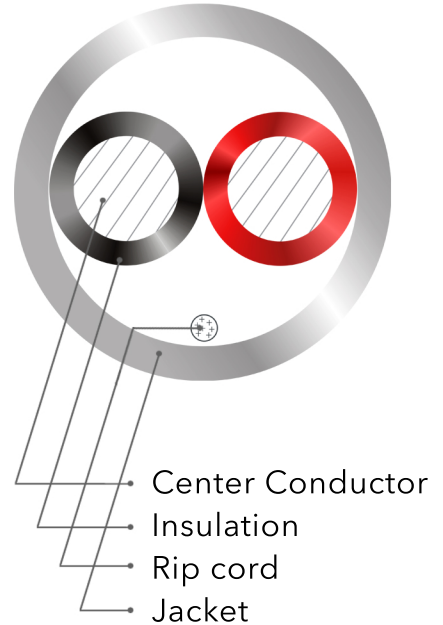

Construction

Conductor 18 AWG 19 Strand Bare Copper
Conductor Count 2
Insulation PVC (0.011" nom.)
Insulation Colors Black, Red
Lay Length 3.1" nom
Shielding N/A
Rip Cord Yes
Jacket PVC (0.017" nom.)
Overall Diameter 0.17" nom.
Print Legend ADI PRO P/N: RN-xxxx OXYGEN FREE
2C18 3180662 C(ETL)US CL3R 75C,
CMR FT4 ROHS LOT#xxxx xxxxFT

Properties

Operating Voltage 300 Volts max.
DC Resistance 6.66 Ohms/1000' at 20°C
Capacitance 22.7 pF/ft. nom.
Temperature -20°C to 75°C
Flame Rating UL 1666 (Riser);
CSA C22.2 No. 2556 (FT4)
RoHS Compliant Yes
Country of Origin CHINA

PART#	COLOR	LENGTH	BOX
RN-9030101	WHITE	1000FT	EXPRESS BOX
RN-9030109	GREY	1000FT	EXPRESS BOX
RN-9030501	WHITE	500FT	EXPRESS BOX
RN-9030509	GREY	500FT	EXPRESS BOX
RN-9035501	WHITE	500FT	SPEED COIL



For more information contact your ADI Sales person or visit adiglobal.com/adiexclusivebrands