

18/4 RISER RATED, UNSHIELDED SECURITY & CONTROL CABLE




18 AWG 4 Stranded Conductors, Unshielded

Ratings
Approvals

CMR, CL3R, FT4
ETL Listed

Construction

Conductor 18 AWG 19 Strand Bare Copper
Conductor Count 4
Insulation PVC (0.011" nom.)
Insulation Colors Black, Red, White, Green
Lay Length 3.8" nom.
Shielding N/A
Rip Cord Yes
Jacket PVC (0.017" nom.)
Overall Diameter 0.199" nom.
Print Legend ADI PRO P/N: RN-xxxx OXYGEN FREE
4C18 3180662 C(ETL)US CL3R 75C,
CMR FT4 ROHS LOT#xxxx xxxxFT

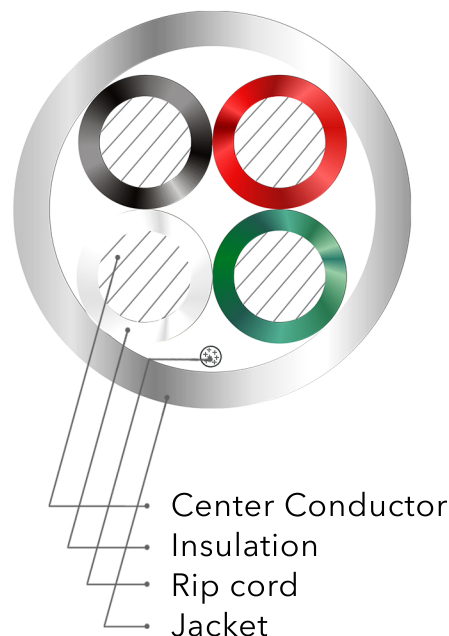

Properties

Operating Voltage 300 Volts max.
DC Resistance 6.66 Ohms/1000' at 20°C
Capacitance 22.7 pF/ft. nom.
Temperature -20°C to 75°C
Flame Rating UL 1666 (Riser);
CSA C22.2 No. 2556 (FT4)
RoHS Compliant Yes
Country of Origin CHINA

PART#	COLOR	LENGTH	BOX
RN-9040101	WHITE	1000FT	EXPRESS BOX
RN-9040109	GREY	1000FT	EXPRESS BOX
RN-9040501	WHITE	500FT	EXPRESS BOX
RN-9040509	GREY	500FT	EXPRESS BOX



For more information contact
your ADI Sales person or visit
adiglobal.com/adiexclusivebrands