

# TURING SOLARSHIELD LPR

All-In-One Outdoor Solar Video Surveillance

LS-KG2-ONEMLP-3Y

## KEY FEATURES

- ✓ Easy and rapid deployment
- ✓ Smart Security, powered by Turing Vision Cloud
- ✓ NDAA Compliant 5MP Outdoor Cloud LPR Camera
- ✓ Built-in 4G/LTE router with remote network management
- ✓ Remote management (Battery Status, Battery Reboot.etc)




SIM Carriers



T Mobile

verizon

FIRSTNET.  
Built with AT&T

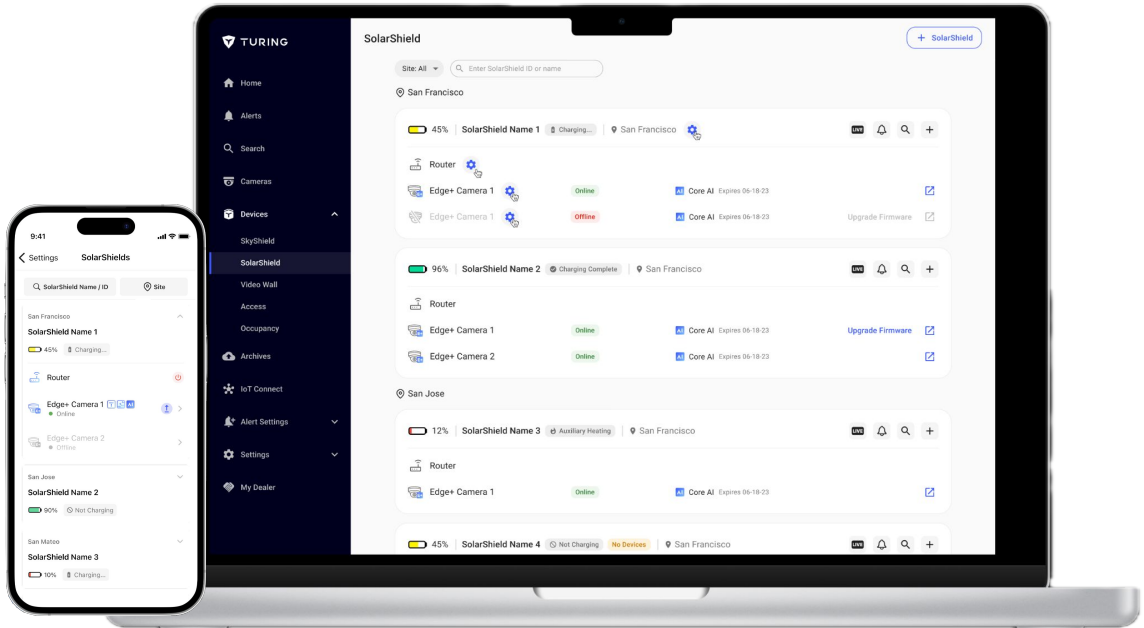

## KEY FEATURES

- ✓ Remote Power management including battery reboot and router reboot
- ✓ Remote status monitoring including charging status, battery status and router status
- ✓ Support Time Lapse video creation on the cloud
- ✓ Receive Instant Smart Alerts for Intruders/Trespassers/Person of Interest/Vehicle of Interest via SMS/Email/Push Notifications
- ✓ Remote Live Stream Monitoring
- ✓ Share Live Camera Streams With First Responders
- ✓ Identify and search license plates, recognize vehicle attributes, and enhance security with smart AI-powered analysis.
- ✓ View Live Footage From any Desktop / Mobile Device
- ✓ Flexible Hybrid Storage Locally or on the Cloud

| GENERAL                    |  |
|----------------------------|--|
| <b>Dimensions (LxWxH)</b>  | MINI Waterproof Case:<br>LS-KG2-ONEN-01: 13.0" x 8.7" x 17.7"<br><br>Single Solar Photovoltaic Racking:<br>TA-S90W: 12.8" x 5.9" x 13.8" |
| <b>Weight</b>              | MINI Waterproof Case: 19.8lbs<br>Single Solar Photovoltaic Racking: 8.8lbs   |
| <b>Working Environment</b> | Outdoor: -30°C~+ 60°C (-22°F~+140°F)   |
| <b>Rating</b>              | IP65   |

| POWER                        |   |
|------------------------------|---|
| <b>Standard Output Power</b> | 2x TL-S90W: 90W/18V<br><br>Power/Voltage: 90W/18V                     |
| <b>Power Interface</b>       | Integrated Bracket & Smart Controller, Solar Module and Smart Battery |

| BATTERY                       |                                |
|-------------------------------|--------------------------------|
| <b>Battery Type</b>           | Lithium                        |
| <b>Capacity</b>               | 2x 26Ah Battery                |
| <b>Working Voltage</b>        | 9~12.6V                        |
| <b>Working Current</b>        | 10A Max                        |
| <b>Operating Temperatures</b> | -30°C to 60°C (-22 F to 140°F) |

| Heat        |  |
|-------------|--|
| <b>Heat</b> | Smart battery module, supports intelligent auxiliary heating, adapts to extreme cold weather |

| CAMERA (EVD5LP256)          |   |
|-----------------------------|---|
| <b>Sensor</b>               | 1/2.7" 5MP Progressive Scan CMOS                                      |
| <b>Lens</b>                 | 2.7-13.5mm zoom lens; F1.6~F3.3                                       |
| <b>Field of View</b>        | H: 113~31.4°D: 130.9~34.8°  |
| <b>Minimum Illumination</b> | Color: 0.01Lux; 0 Lux with IR in B&W night mode                       |
| <b>IR Range</b>             | Smart IR Range: Up to 164 ft (50 m)                                   |
| <b>IR Wavelength</b>        | Wave Length: 850nm  |
| <b>Wide Dynamic Range</b>   | 120 dB wide dynamic range (WDR); 2D & 3D digital noise reduction      |
| <b>Physical I/O</b>         | Audio: Line In/Line Out; G.711/G.726; Alarm: Digital I/O; dry contact |


| NETWORK(Cellular)        |  |
|--------------------------|--|
| <b>Standard and Band</b> | LTE FDD: B1/B3/B5/B7/B8/B20/B28<br>B1/B2/B3/B4/B5/B7/B8/B28 (Optional),<br>B2/B4/B5/B12/B13/B17/B66/B71 (Optional)<br>LTE TDD: B38/B39/B40/B41<br>HSPA+/HSUPA/HSDPA/WCDMA/UMTS<br>2100/1900/900/850MHz<br>EV-DO: BC0<br>CDMA 1x: BC0<br>EDGE/GPRS/GSM 850/900/1800/1900MHz |
| <b>Antenna Interface</b> | Cellular: 2 * Standard SMA female antenna interface,<br>characteristic impedance: 50 Ω   |
| <b>SIM/UIM Slot</b>      | Standard drawer-type user card interface   |

| LOCAL VIDEO STORAGE    |  |
|------------------------|--|
| <b>Onboard Storage</b> | 256GB, up to 30 days*<br><small>*Actual retention period may vary based on scene complexity and activity</small> |

| VIDEO & AUDIO                      |  |
|------------------------------------|--|
| <b>Video Compression</b>           | H.265/H.264 w/ smart encoding; MJPEG;  |
| <b>Resolution &amp; Frame Rate</b> | Main Stream: 2592x1944 (Max), 2560x1440 (Default)<br>up to 30 FPS<br>Sub Stream: 1280*720 up to 30 FPS<br>Third Stream: 640*360 up to 30 FPS |
| <b>Image Flip &amp; Rotation</b>   | Normal / Vertical / Horizontal / 180° / 90° Clockwise / 90° Counterclockwise   |


## MOUNT OPTIONS Pole Mount

3.9 into 11.8 in dia Stainless Steel Adjustable Clamp x4 (Included)



## MOUNT OPTIONS Wall Mount

M8 x 80  
(Not included in Product)



## Typical Application

Turing products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.

This model has NO SPECIFIC PROTECTION

| Level                         | Description  |
|-------------------------------|--|
| <b>Top-level protection</b>   | Turing products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more                           |
| <b>Moderate protection</b>    | Turing products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 1 mile away from coastlines, as well as areas affected by acid rain. |
| <b>No specific protection</b> | Turing products at this level are equipped for use in areas where no specific anti-corrosion protection is needed  |