

## ACM220 Series

### Power Supply/Chargers with Multi-Output Access Power Controllers

Altronix ACM220 series distribute and switch power to access control systems and accessories. They convert a 220VAC 50/60Hz input into eight (8) independently controlled 12VDC or 24VDC fuse protected outputs. These power outputs can be converted to dry form “C” contacts. Outputs are activated by an open collector sink or normally open (NO) dry trigger input from an Access Control System, Card Reader, Keypad, Push Button, PIR, etc. Units will route power to a variety of access control hardware devices including: Mag Locks, Electric Strikes, Magnetic Door Holders, etc. Outputs will operate in both Fail-Safe and/or Fail-Secure modes. The FACP Interface enables Emergency Egress, Alarm Monitoring, or may be used to trigger other auxiliary devices. The fire alarm disconnect feature is individually selectable for any or all of the eight (8) outputs.



AL600ACM220

#### Key Features

- Eight (8) independently controlled outputs
- Output options:
  - a) Eight (8) Fail-Safe and/or Fail-Secure power outputs;
  - b) Eight (8) form “C” 5A rated relay outputs;
  - c) Any combination of the above
- Eight (8) auxiliary power outputs (unswitched).
- Output fuses are rated @ 3.5A
- Filtered and electronically regulated outputs
- Supervision:
  - AC Fail
  - Battery Fail and Battery Presence
- Fire Alarm disconnect (latching or non-latching) is individually selectable for any or all of the eight (8) outputs
- Alarm output relay indicates that FACP input is triggered
- Fire Alarm disconnect input options:
  - a) Normally open (NO) or normally closed (NC) dry contact input
  - b) Polarity reversal input from FACP signaling circuit
- Built-in charger for sealed lead acid or gel type batteries
- Instantaneous transfer to stand-by batteries
- CE European Conformity
- Lifetime Warranty

#### ACM220 Series Power Supply Configuration Reference Chart

Altronix Model Number	12VDC Total Output Current	24VDC Total Output Current	Fused Outputs	Individual Output Rating	220VAC 50/60Hz Input Current Draw	Power Supply Board Input Fuse Rating	Power Supply Board Battery Fuse Rating
AL400ACM220	4A	3A	8	2.5A	1.2A	5A/250V	15A/32V
AL400ACMJ220							
AL600ACM220	6A	6A			1.5A		
AL600ACMJ220							
AL1012ACM220	10A	—				2.2A	15A/32V
AL1012ACMJ220							
AL1024ACM220	—	10A				3A	6.3A/250V
AL1024ACMJ220							

#### Lifetime Warranty



# ACM220 Series

Power Supply/Chargers with Multi-Output Access Power Controllers

## Specifications

### Input

Voltage 220VAC (working range 198VAC - 256VAC), 50/60Hz

Fusing Varies, see Reference Chart

### Outputs

Voltage 12VDC or 24VDC, see Reference Chart

Current Varies, depending on the model

Protection Fused 3.5A

Auxiliary 3.5A (unswitched)

Other Overvoltage protection  
Filtered and regulated outputs

### Battery Charging

Capacity 12AH/12VDC (1 or 2 within enclosure)  
18AH/12VDC (requires larger "J" enclosure)  
40AH/65AH (requires separate enclosure)

Type Sealed lead acid or gel type

Fuse Rating 15A/32V  
AL600ACM(J)220 doesn't have battery fuse

Failover Upon AC loss, instantaneous

Batteries are sold separately

### Fire Alarm Disconnect

Latching or non-latching, individually selectable for any or all of the eight (8) outputs

### Supervision

AC Failure Form "C" contacts

Battery Form "C" contacts

### Indicators (LED)

Input 220VAC is present

DC Output Powered

Battery Discharged or not connected

Relays Individual LEDs indicate outputs are triggered (relays energized)

FACP Indicates FACP disconnect is triggered

## Agency Listings

CE European Conformity

## Physical and Environmental

### Dimensions (H x W x D)

**AL400ACM220, AL600ACM220, AL1012ACM220, and AL1024ACM220:**

Enclosure: 15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)

Shipping: 16.5" x 13.5" x 6" (419.1mm x 342.9mm x 152.48mm)

**AL400ACMJ220, AL600ACMJ220, AL1012ACMJ220, and AL1024ACMJ220:**

Enclosure: 18" x 14.5" x 4.625" (457.2mm x 368.3mm x 117.5mm)

Shipping: 21.75" x 18.25" x 5.75" (552.5mm x 463.6mm x 146.1mm)

### Weight (approx.)

Model	Product Weight	Shipping Weight
AL400ACM220	10.7 lb. (4.85 kg)	12 lb. (5.44 kg)
AL400ACMJ220	14 lb. (6.35 kg)	15 lb. (6.8 kg)
AL600ACM220	10.3 lb. (4.67 kg)	11.6 lb. (5.26 kg)
AL600ACMJ220	14.85 lb. (6.74 kg)	17.1 lb. (7.76 kg)
AL1012ACM220	10.7 lb. (4.85 kg)	12 lb. (5.44 kg)
AL1012ACMJ220	14.1 lb. (6.40 kg)	15 lb. (6.80 kg)
AL1024ACM220	11.75 lb. (5.33 kg)	13.05 lb. (5.92 kg)
AL1024ACMJ220	14.9 lb. (6.76 kg)	16.1 lb. (7.3 kg)

### Temperature

Operating: 0°C to 49°C (32°F to 120°F)

Storage: -20°C to 70°C (-4°F to 158°F)

Relative Humidity 85% +/- 5%

### BTU/Hr. (approx.)

Model	12VDC	24VDC
AL400ACM(J)220	25	37
AL600ACM(J)220	37	74
AL1012ACM(J)220	61	N/A
AL1024ACM(J)220	N/A	123

## Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA


phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

# ACM220 Series

Power Supply/Chargers with Multi-Output Access Power Controllers

## Dimensions and Drawing

AL400ACM220, AL600ACM220, AL1012ACM220, AL1024ACM220 Dimensions (H x W x D approximate)  
15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)

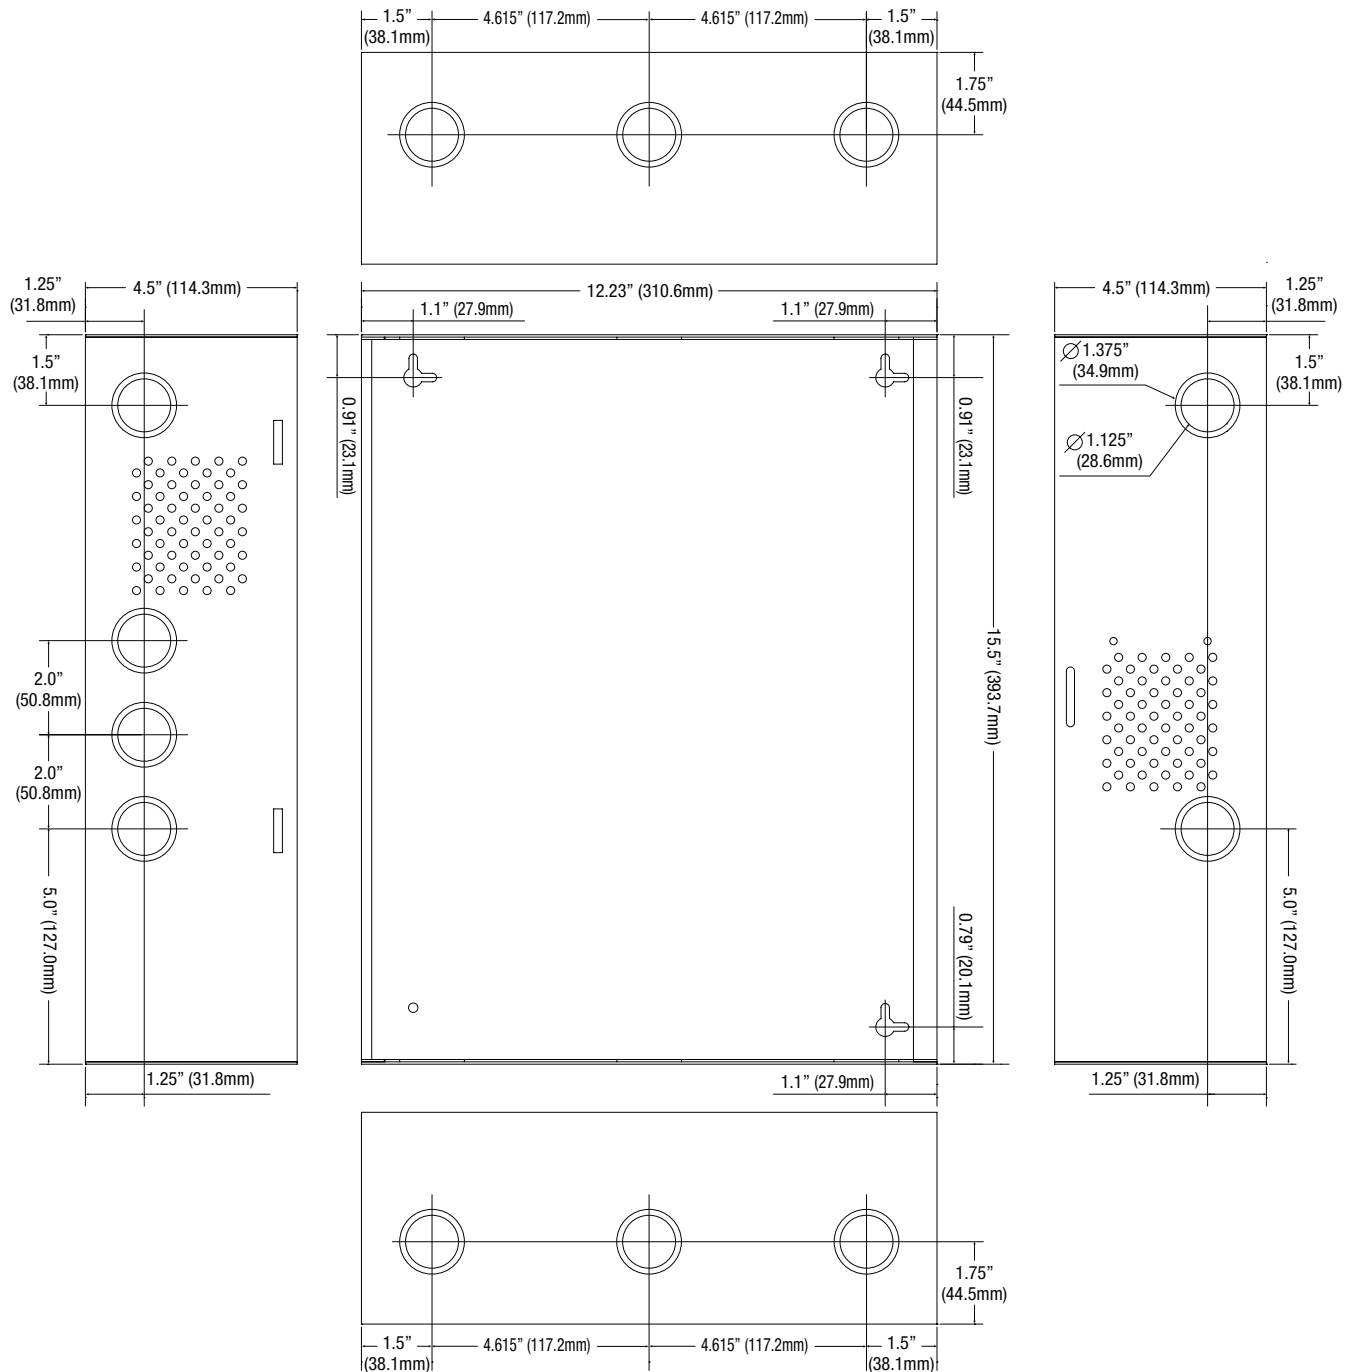


### Lifetime Warranty

# ACM220 Series

Power Supply/Chargers with Multi-Output Access Power Controllers

## Dimensions and Drawing

AL400ACMJ220, AL600ACMJ220, AL1012ACMJ220, AL1024ACMJ220 Dimensions (H x W x D approximate)  
 18" x 14.5" x 4.625" (457.2mm x 368.3mm x 117.5mm)

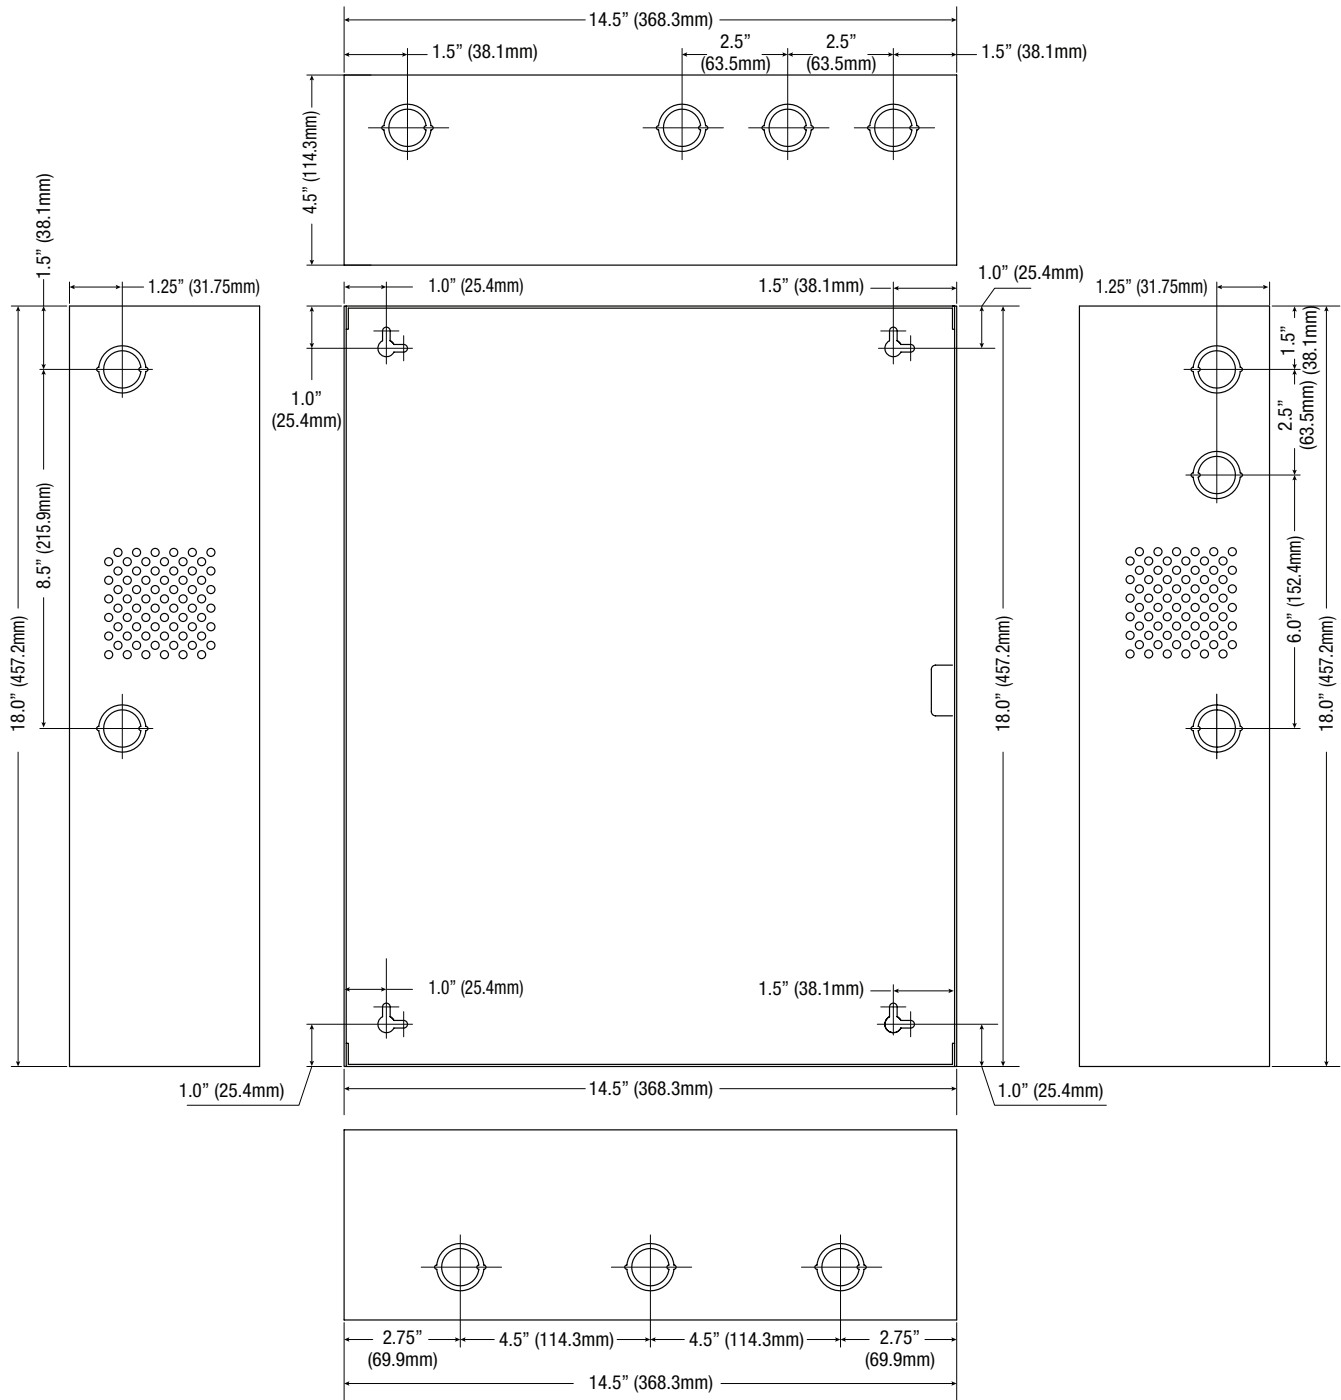

### Lifetime Warranty