UTP Z-MAX™ Module Installation Instructions

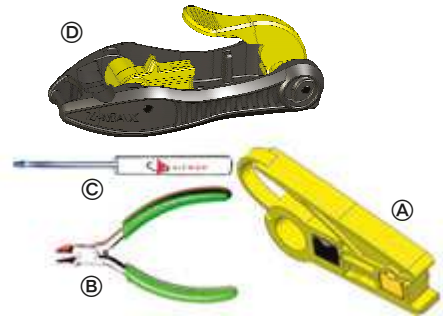

Tools Required

Ⓐ CPT-RGTP Ⓑ Diagonal Cutter
Ⓒ Small Flathead Screwdriver Ⓓ Z-Tool

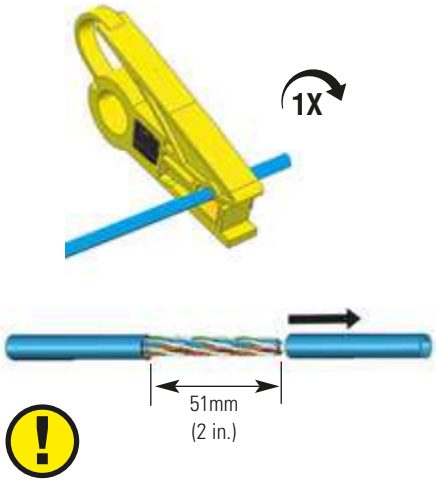

Solid Conductor Cable ≥ 6.4mm (0.25in.) Shown Here
See back page for additional cable options

1

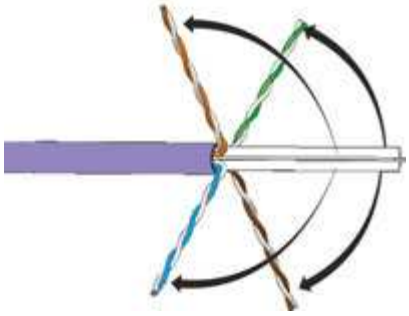

2

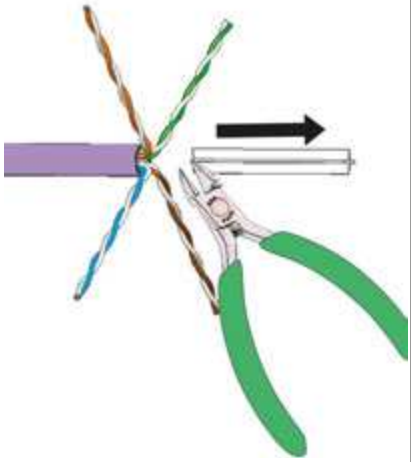

3

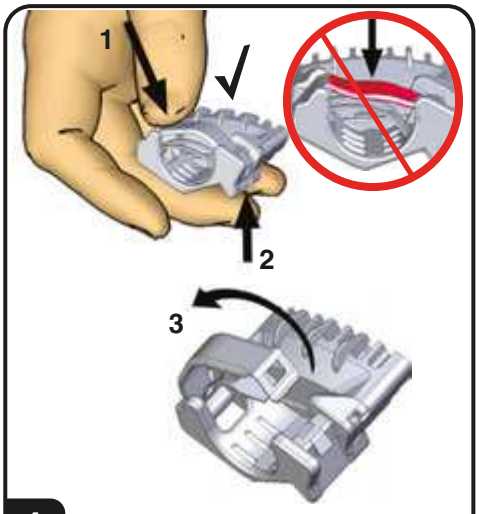

4

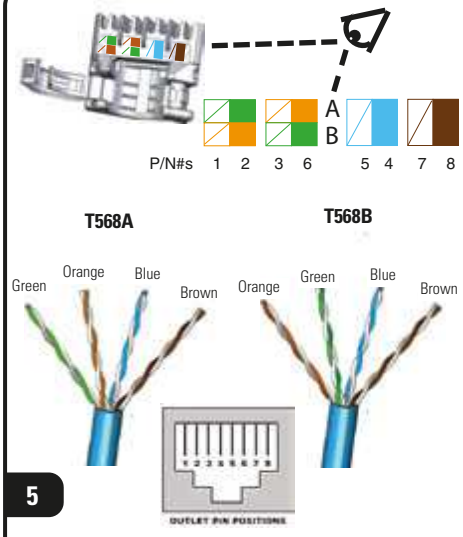

5

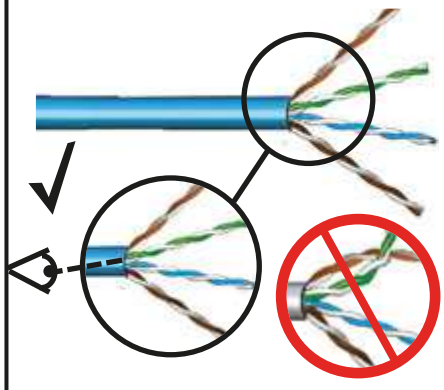

6

UTP Z-MAX™ Module Installation Instructions

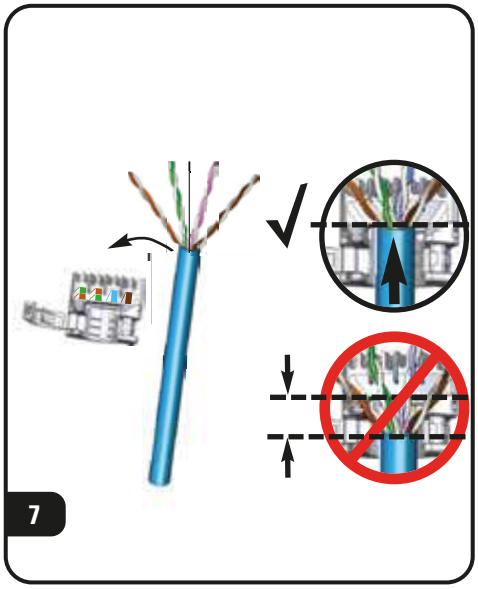

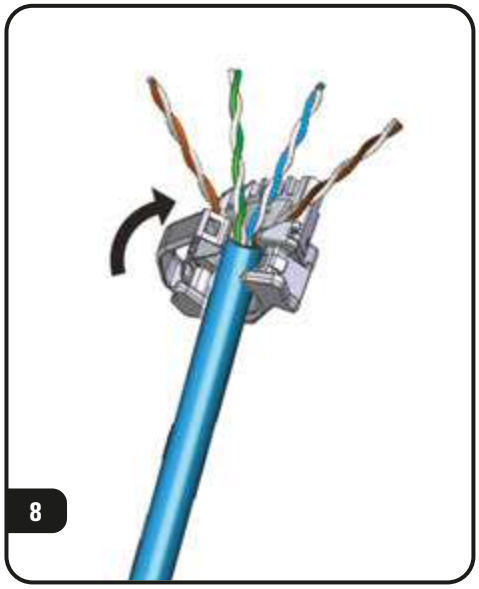

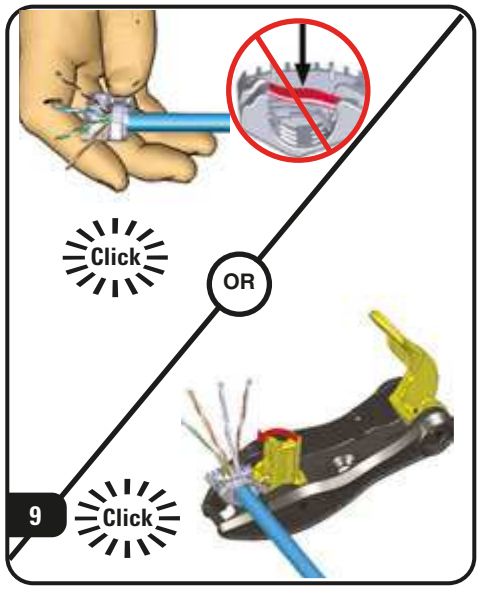

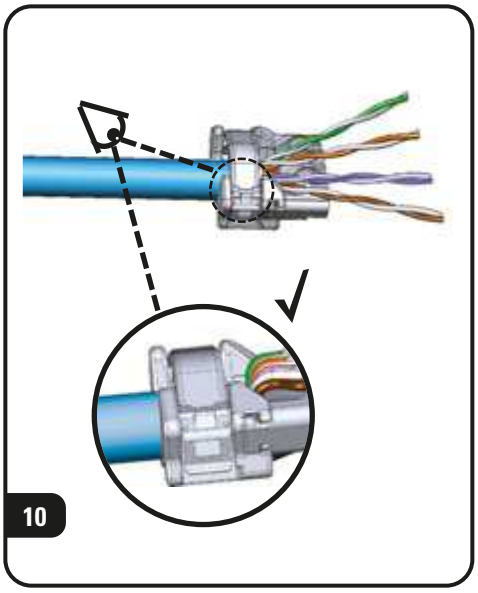

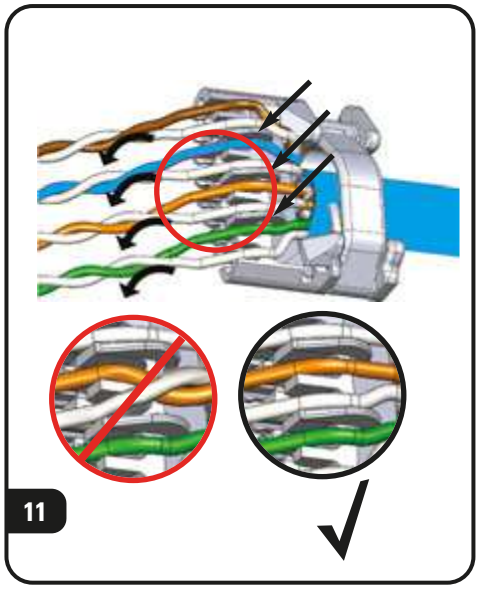

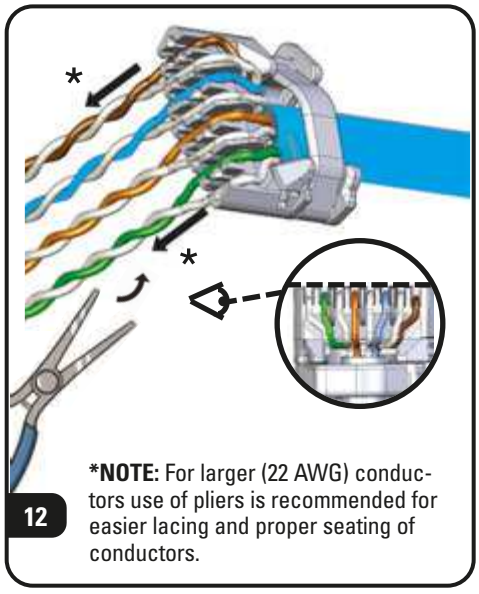

***NOTE:** For larger (22 AWG) conductors use of pliers is recommended for easier lacing and proper seating of conductors.

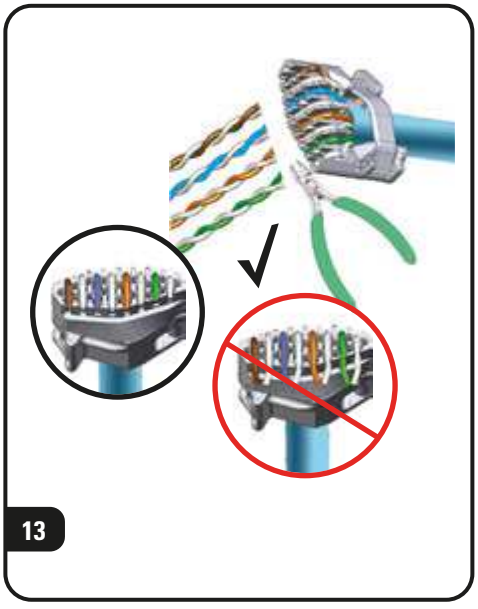

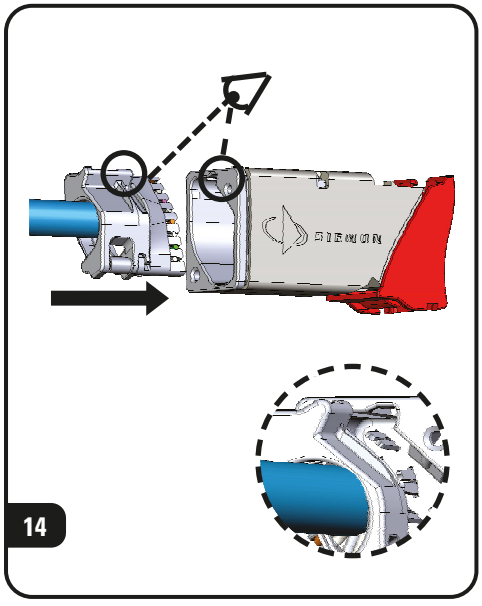

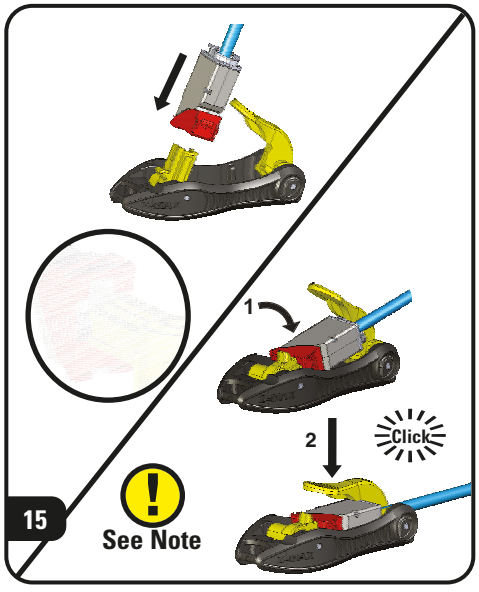

NOTE (step 15): Ensure proper seating of outlet. Fully depress lever in one motion. (ie. do not partially depress then lift lever to reseat outlet).

UTP Z-MAX™ Module Installation Instructions

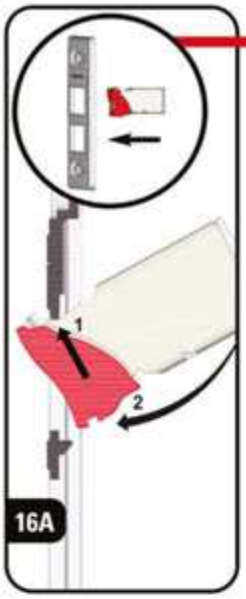

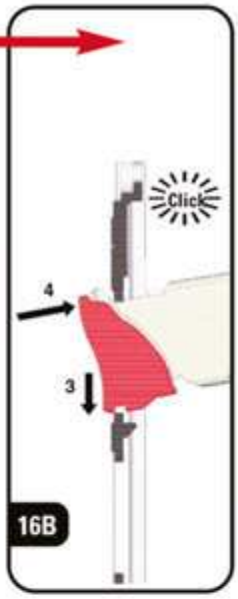

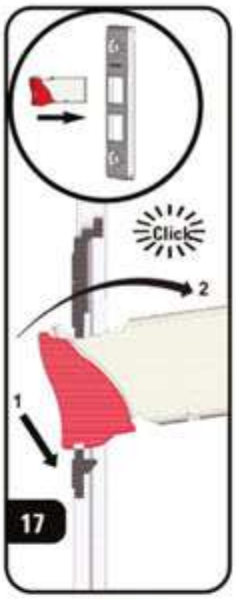

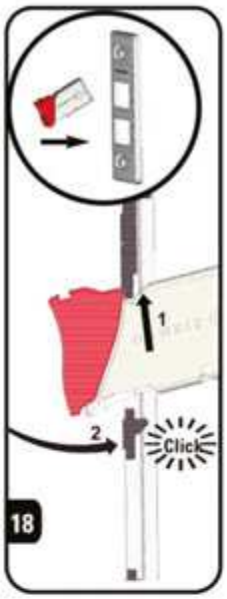

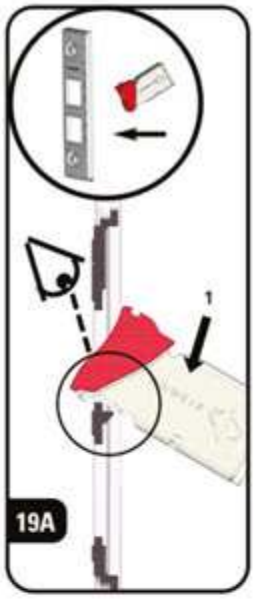

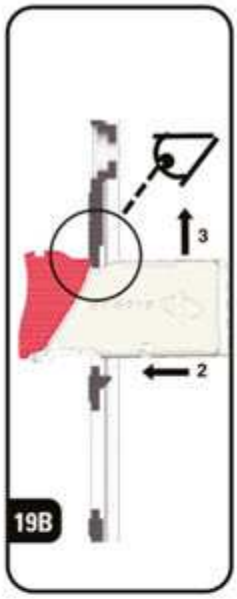

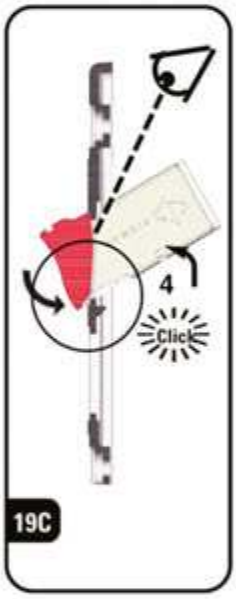

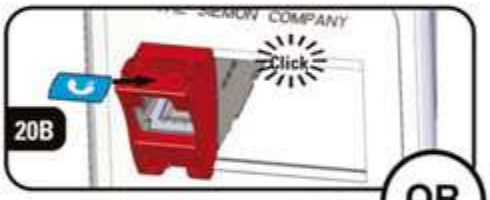

OR

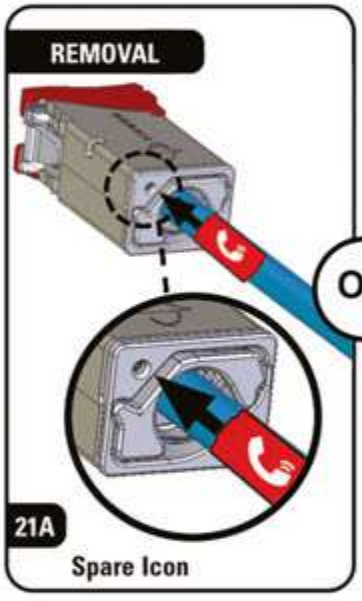

OR

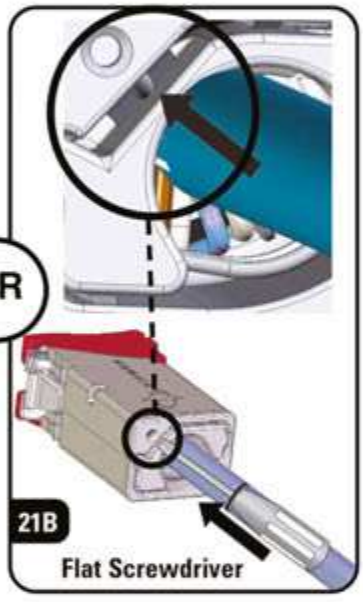

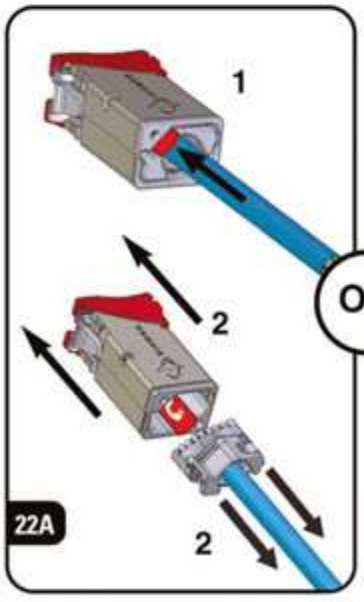

OR

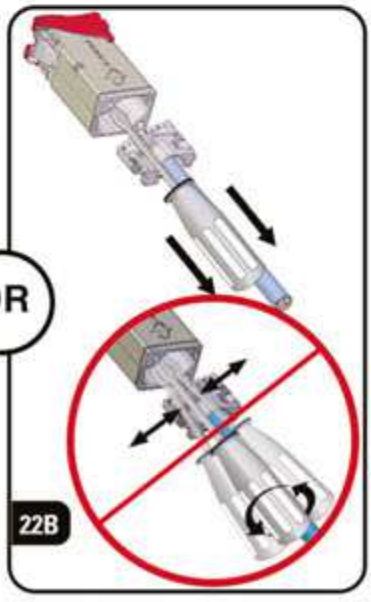

UTP Stranded or solid conductor cable < 6.4mm (0.25 in)

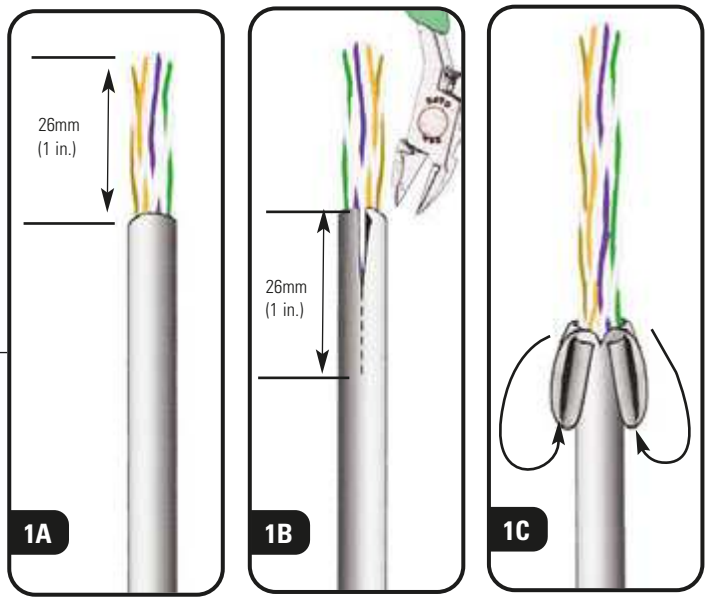

NOTE Alternate step 1. for smaller diameter cable

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

Worldwide Headquarters
North America
Watertown, CT USA
Phone (1) 860 945 4200

Regional Headquarters
Europe Russia Africa
Chertsy, Surrey, England
Phone (44) 0 1932 571771

Regional Headquarters
China
Shanghai, P.R. China
Phone (86) 215385 0303

Regional Headquarters
Latin America
Bogota, Colombia
Phone (571) 657 1950/51/52

Regional Headquarters
India Middle East
Dubai, United Arab Emirates
Phone (971) 4 3689743

Regional Headquarters
Asia Pacific
Sydney, Australia
Phone (61) 2 8977 7500

Siemon Interconnect Solutions
Watertown, CT USA
Phone (1) 860 945 4213 US
www.siemon.com/SIS

To assist safe installations, comply with the following:
A. Use caution when installing or modifying telecommunications circuits.
B. Never touch uninsulated wire terminals unless the circuit has been disconnected.
C. Never install this device in a wet location.
D. Never install wiring during a lightning storm.

Lors de l'installation, respectez les consignes de sécurité suivantes:
A. Utiliser avec prudence lors de l'installation ou de la modification circuits de télécommunications.
B. Ne jamais toucher les bornes de fil métallique non isolés sauf si le circuit a été débranché.
C. Ne jamais installer cet appareil dans un endroit humide.
D. Ne jamais installer pendant un orage.

To ensure you have the latest revision to this document, please visit: **http://www.siemon.com/us**

Rev. F 5/19 100.18080.02

© 2019 Siemon

Visit our website at www.siemon.com for detailed global office contact information

SIEMON™
www.siemon.com