Quam CIS2/45

The CIS2/45 is a 3-gang, vandal resistant call-in station with integrated 45 Ohm speaker/microphone and a momentary contact (normally open), pushbutton callswitch. With a tamper resistant, heavy gauge, stainless steel faceplate and three (3) interwoven steel screens to protect the speaker, the CIS2/45 provides a very durable, high security call station for the most challenging applications. Tamper resistant, #6-32 x 1", 'pin-in-torx' screws are included.

APPLICATION	**Intended Use:**	Indoor environment
	Program Material:	Signal tones and voice
	Mounting:	3-gang electrical box
AUDIO PERFORMANCE	**Average Sensitivity:**	87dB SPL, 1W/ 1M
	Loudspeaker Power Rating:	4W RMS, EIA 426A Standard
	Maximum Power Rating:	5W @ 8 Ohms
	Calculated Output:	93dB SPL, 5W/ 1M
	Magnet Type & Weight:	BeFe Ceramic, 2.35 oz. Nominal
	Frequency Response:	300Hz - 10kHz, EIA 426A Standard
	Nominal Coverage Angle:	90° Included Angle, -6dB/2kHz, Half Space
	Audio Connection:	0.205" Spade Lugs
COMPONENT	**Dimension:**	5 ½" (H) x 7 ½" (W) x 1 15/16" (D)
	Weight:	3 lbs.
	Loudspeaker Model:	30C25Z45OT
	Loudspeaker Specs:	3" O.D. loudspeaker
	Finish:	Brushed
	Material:	12 gauge, stainless steel faceplate
	Callswitch:	Chrome plated button, momentary contact
	Electrical Connection:	Screw-down, pinch
	Other:	Three (3) interwoven, steel screens mounted between faceplate and loudspeaker, four (4), tamper resistant, #6-32 x 1", 'pin-in-torx' screws included
RECOMMENDED QUAM COMPONENTS	**Enclosures:**	Surface Mount — SE3GVP, SE10GVP
	Custom Engraving & Fill:	Contact the factory for details and lead times

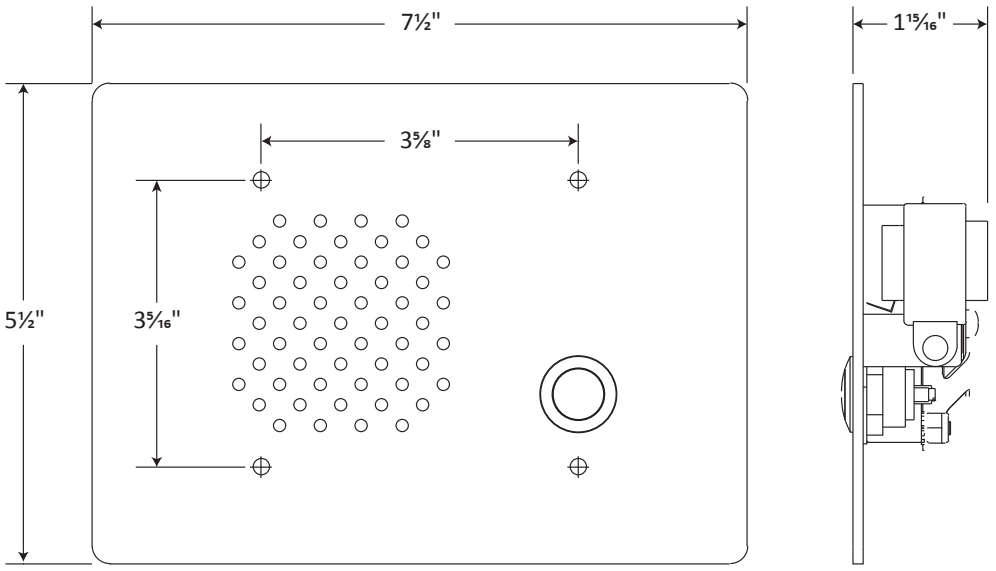

Quam Nichols Company | 234 East Marquette Road | Chicago, IL. 60637 | t: 800-633-3669 | f: 888-633-3669 | e: NeedNow@QNC.com | QuamSpeakers.com
©2020 Quam Nichols Company reserves the right to make changes and/or improvements to its products at any time and without notice. | v.2018