FXLuminaire

VS LED Up Light **DESIGNER** PREMIUM

PROJECT

CATALOG #

TYPE

NOTES

Designed for midsized landscapes, the VS — like its smaller counterpart, the CC — is unsurpassed in both elegance and performance. The VS combines first-class LED technology with premium materials to create a fixture that is truly unparalleled.

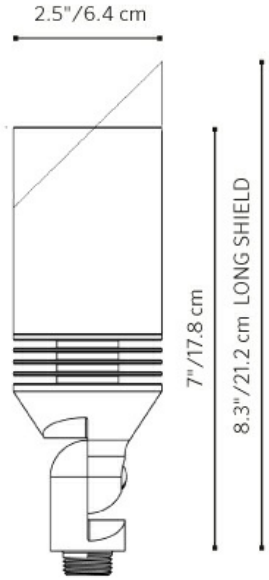

Quick Facts

- Brass construction
- Natural brass or antique finishes
- Compatible with Luxor® technology
- Input voltage: 10-15V
- Cree® Integrated LEDs
- ProAim™ adjustability
- Phase and PWM dimmable

Output	3LED	3LEDT	6LED	9LED	ZDC
Total Lumens†	235	105	421	558	119
Input Voltage	10 to 15V	10 to 15V	10 to 15V	10 to 15V	11 to 15V
Input Power	4.0 W	4.2 W	7.7 W	11.1 W	9.1 W
Power Consumption (VA)	4.4 W	4.5 W	9.3 W	12.2 W	11.0 W
Efficacy (lm/W)	60	430	55	51	23
Color Rendering Index (CRI)	83	-22	83	83	80+
Center Beam Candlepower*					
Flood (35)	547	498	1035	1294	196
Dimming					
Primary Dimming (Transformer)	Consult transformer specifications				
Secondary Dimming (Fixture)	Phase-cut**	Phase-cut**	Phase-cut**	Phase-cut**	Luxor
RGBW Available	No	No	No	No	Yes
Luxor Compatibility					
Default	Zoning	--	Zoning	Zoning	Zoning
ZD Option	Zoning/Dimming	Zoning/Dimming	Zoning/Dimming	Zoning/Dimming	--
ZDC Option	--	--	--	--	Zoning/Dimming/Color
Minimum Rated Life (L70)	72,000	55,000	72,000	72,000	55,000

* Information for straight shroud available in IES files
** For optimal performance, use a trailing-edge, phase-cut dimmer
† Measured using the 2,700K CCT option

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

Warranty

Listings

[field_spec_builder_mount] [field_spec_builder_mount]

Fixture	Control	Power	Shroud	Finish
VS	**ZD** Zone/Dim with Luxor	**3 LED** 4.0W/4.4VA	**[default] - Flat Shroud**	**AB** Antique Bronze
	ZDC Zone/Dim/Color with Luxor	**6 LED** 7.7W/9.3VA	**LS** 45° Angled Long Shroud	**AT** Antique Tumbled
		9 LED 11.1W/12.2VA		**NP** Nickel Plate
		[default ZDC option] 9.1W/11.0VA		**BS** Natural Brass

[ ] – [ ] – [ ] – [ ] – [ ]

EXAMPLE FIXTURE CONFIGURATION: *VS*-XX-XXXX-XX


VS 1LED ILLUMINANCE AT A DISTANCE
Center Beam FC
Beam Width
1.7 ft 109.15 fc 0.6 ft 0.6 ft
3.3 ft 27.29 fc 1.2 ft 1.2 ft
5.0 ft 12.13 fc 1.7 ft 1.8 ft
6.7 ft 6.82 fc 2.3 ft 2.4 ft
8.3ft 4.37 fc 2.9 ft 3.0 ft
10.0 ft 3.03 fc 3.5 ft 3.6 ft
Vertical Spread: 19.6°
Horizontal Spread: 20.2°


VS 6LED ILLUMINANCE AT A DISTANCE
Center Beam FC
Beam Width
1.7 ft 672.48 fc 0.5 ft 0.5 ft
3.3 ft 168.12 fc 1.0 ft 1.0 ft
5.0 ft 74.72 fc 1.5 ft 1.5 ft
6.7 ft 42.03 fc 2.0 ft 2.0 ft
8.3 ft 26.90 fc 2.5 ft 2.5 ft
10.0 ft 18.68 fc 3.0 ft 3.1 ft
Vertical Spread: 16.9°
Horizontal Spread: 17.4°


VS 3LED ILLUMINANCE AT A DISTANCE
Center Beam FC
Beam Width
4.2 ft 34.79 fc 1.7 ft
8.3 ft 8.7 fc 3.4 ft
12.5 ft 3.87 fc 5.2 ft
16.7 ft 2.17 fc 6.9 ft
20.8 ft 1.39 fc 8.6 ft
25.0 ft 0.97 fc 10.3 ft
Vertical Spread: 23.3°


VS 9LED ILLUMINANCE AT A DISTANCE
Center Beam FC
Beam Width
1.7 ft 659.45 fc .5 ft
3.3 ft 164.86 fc 1.0 ft
5.0 ft 73.27 fc 1.5 ft
6.7 ft 41.22 fc 2.0 ft
8.3 ft 26.38 fc 2.6 ft
10.0 ft 18.32 fc 3.1 ft
Vertical Spread: 17.4°

MOUNTING OPTIONS: Specify Separately

Mounts	Catalog No.	
Long Slot Spike	250015840000	
Lock Ring	250030410000SP	
CE Certified Spike	eKitSpike	
Mini J-Box for ½" Thread	MJB-050-XX*	
Post Mount	PM-XX*	
VersaBox® Mount with ½" Thread	VB-050-XX*	
1.0" (25 mm) Copper Riser for GT Path Light	YY*-R-GT-XX*	

Mounts	Catalog No.	
Three-Prong Spike	250020020000	
Super Slot Spike	753900	
Gutter Mount	GM-SS	
ProAim® Ratcheting Spike	PARS	
Super J-Box Spike	SJ-XX*	
Variable Height Riser for Up Lights	VHR-UL	

GLARE CONTROL: Specify Separately

Glare Control	Catalog No.		Glare Control	Catalog No.
Hex Baffle for MR-16 LED Lamps	250015260000			

POWER OPTIONS: Specify Separately

Power	Catalog No.	
Plug-In Transformer, 6 W	MT-6W	
Surge Protection Module -	SURGE-MOD	

Power	Catalog No.	
Step-Down Transformer, UV (120/277 V to 12 V)	ST-UV	