CX-EPD 2000L

Pre Load Electric Strikes Installation Instructions and Technical Support

D00626 01

Camden Door Controls
Mississauga, Ontario L4W2T7
Phone: 1-877-226-3369
(877-CAMDEN9)
Fax: 905-366-3378
info@camdencontrols.com
www.camdencontrols.com

Adjustment:
To change position of keeper, use Phillips screwdriver to loosen (3) screws, move keeper to desired location and then tighten.

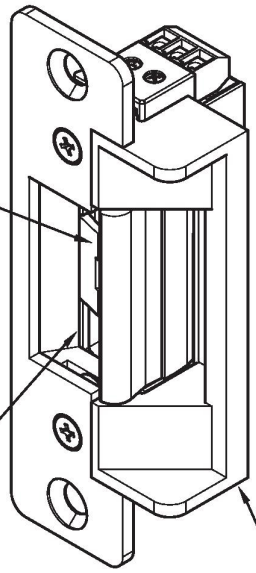

Selection:
Fail Safe/Fail Secure
use Phillips screwdriver to select setting

Note:
Pre load feature only functional with fail secure operation.

Latch monitoring standard on all pre load models.

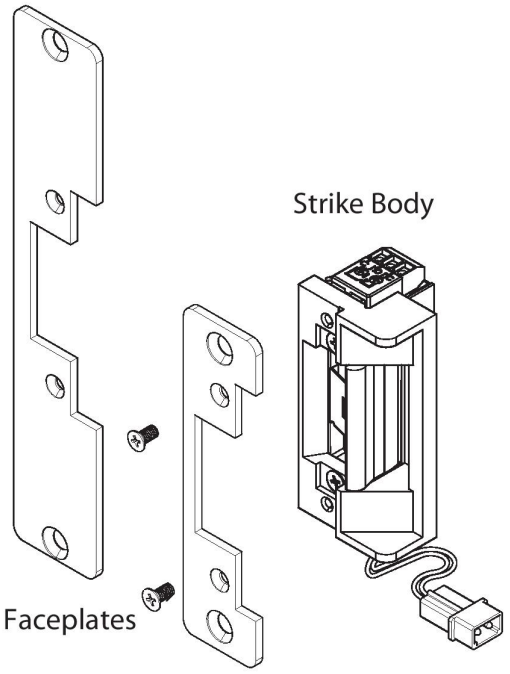

Jamb Preparation
with short faceplate

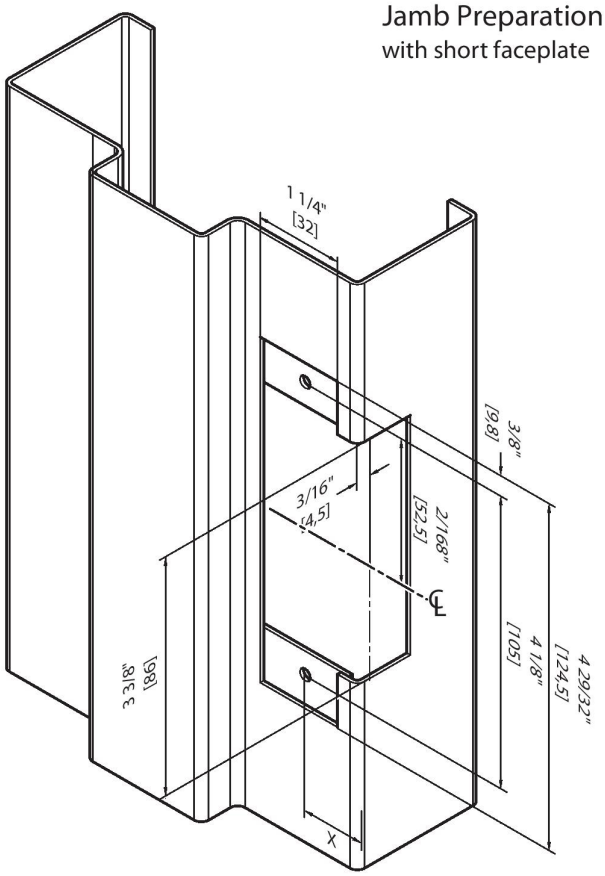

Dimensions

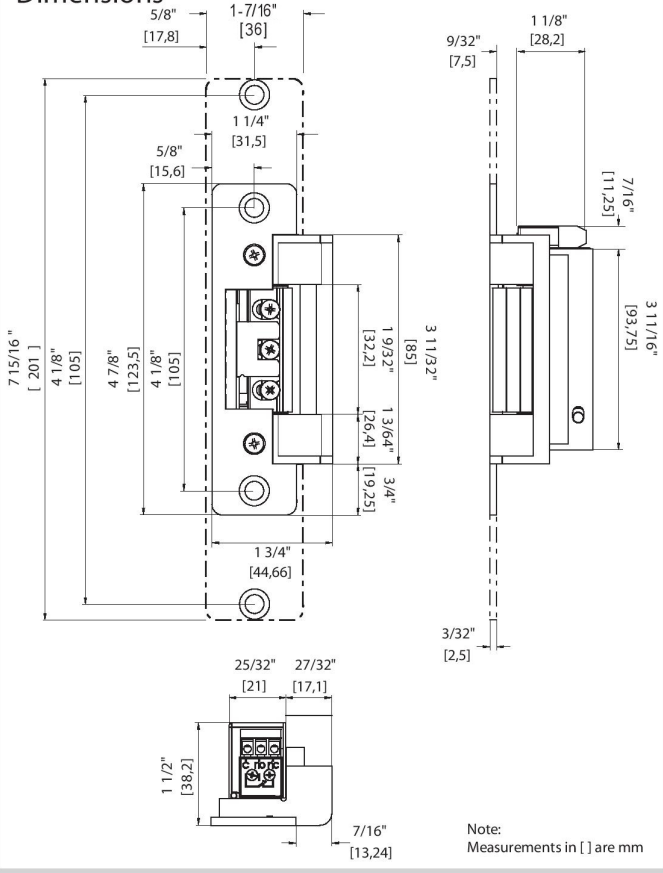

Note:
Measurements in [ ] are mm

Connection

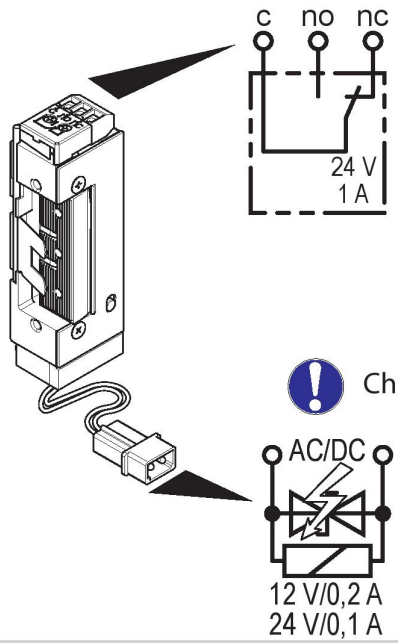

Latch Monitoring Output

Built-in latch monitoring feature wired to access control system.

Power Input

12/24V AC/DC

Using a multimeter, **confirm that you have the correct** output voltage at the power supply.

Then, using a multimeter, **confirm that you have the** correct input voltage at the strike.

+/- doesn't matter!

Check Lock

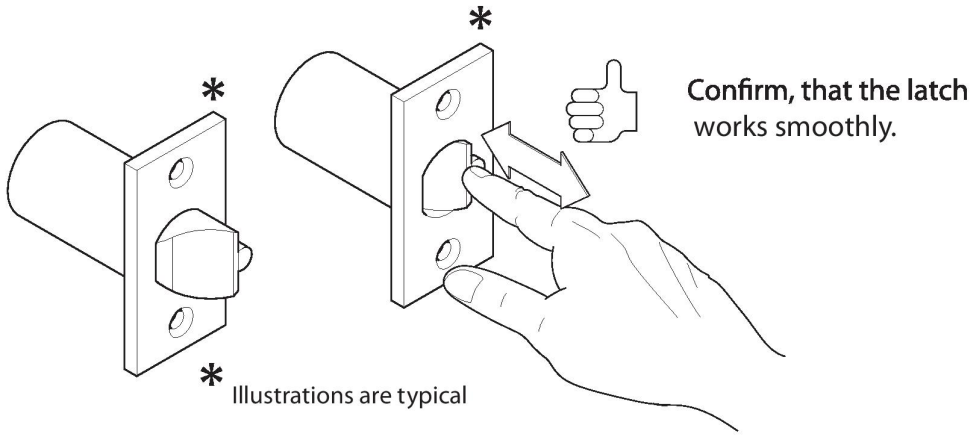

Confirm, that the latch works smoothly.