由 Autodesk 教育版产品制作

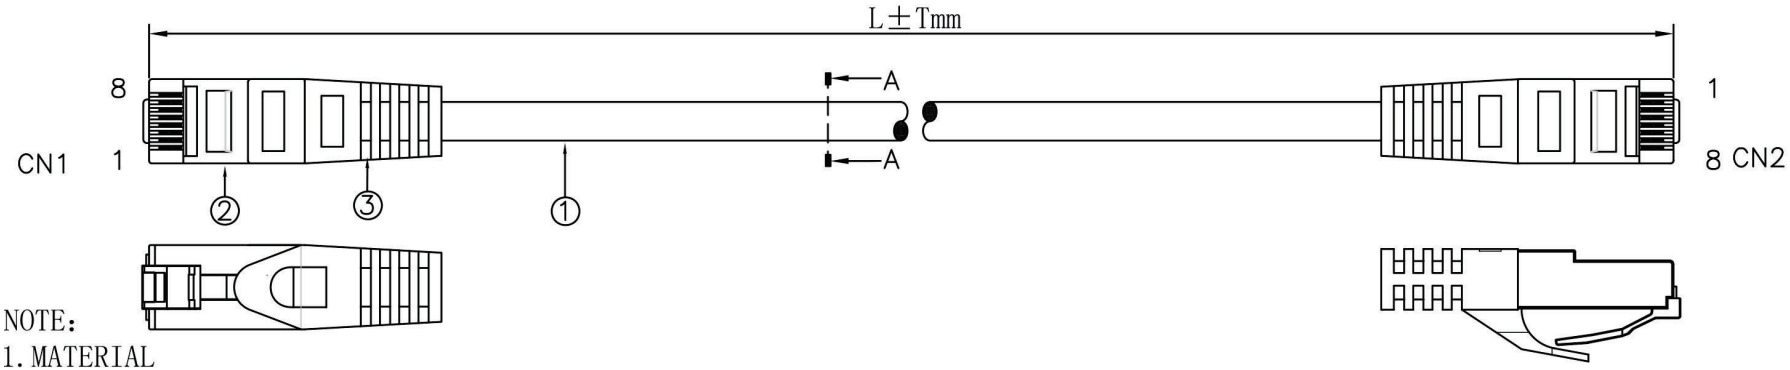

NOTE:

1. MATERIAL
   - 1.1 CABLE: 24AWG (7/0.195CU±0.008)*4PAIR+ PVC JACKET.(CM)
   - 1.2 CONNECTOR: RJ45(8P8C) MALE CAT5E TYPE,
     INSULATION: CLEAR POLYESTER, UL94V-2.
     CONTACTS: BRASS, G/F
   - 1.3 PVC MOLDING: PVC,
   - 1.4 ALL COMPONENTS ARE RoHS COMPLIANT.
2. ELECTRICAL
   - 2.1 100% OPEN AND SHORT TEST.
   - 2.2 FLUKE 6 CHANNELS TEST QUALIFIED.

UL NO. E310848

MODEL	L(FT)	COLOR
71054301WH	1	WHITE
71054303WH	3	
71054305WH	5	
71054307WH	7	
71054310WH	10	
71054301BK	1	BLACK
71054303BK	3	
71054305BK	5	
71054307BK	7	
71054310BK	10	
71054301BL	1	BLUE
71054303BL	3	
71054305BL	5	
71054307BL	7	
71054310BL	10	
71054301GN	1	GREEN
71054303GN	3	
71054305GN	5	
71054307GN	7	
71054310GN	10	
710543010R	1	ORANGE
710543030R	3	
710543050R	5	
710543070R	7	
710543100R	10	

MODEL	L(FT)	COLOR
71054301RD	1	RED
71054303RD	3	
71054305RD	5	
71054307RD	7	
71054310RD	10	
71054301YW	1	YELLOW
71054303YW	3	
71054305YW	5	
71054307YW	7	
71054310YW	10	
71054301PR	1	PURPLE
71054303PR	3	
71054305PR	5	
71054307PR	7	
71054310PR	10	
71054301GY	1	GREY
71054303GY	3	
71054305GY	5	
71054307GY	7	
71054310GY	10	

PIN OUT

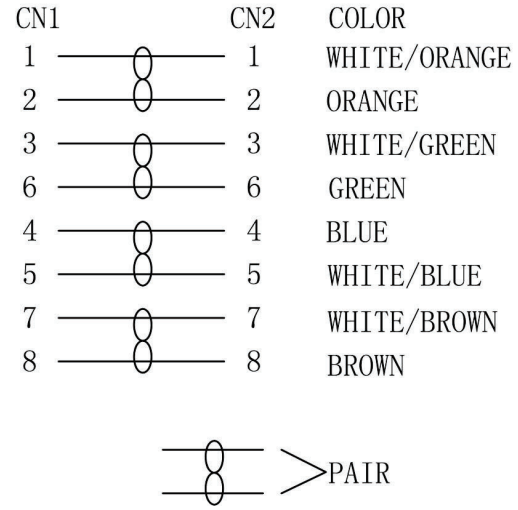

Length	Tolerance
L≤1000mm	±30mm
1000<L≤5000mm	±50mm
5000<L≤10000mm	±100mm
10000<L≤20000mm	±200mm
20000mm<L	±500mm

SECTION A-A

REV.	DESCRIPTION	DATE
00	NEW DOCUMENT	2016-08-02

Tolerance: X. ±0.5 / .X ±0.3 / .XX ±0.10
Angle: X° ±3° / .X° ±1°
SCALE: FREE
UNIT: mm
REV.: 00
CUSTOMER:
SHEET 1/1

PAIGE

CUSTOMER P/N:
COMPANY P/N:
DWG. No.: T160802-2
TITLE: 24AWG CAT5E UTP PATCH CABLE

Approved by WEI MING
Checked by
Design by QIN MIN

由 Autodesk 教育版产品制作
由 Autodesk 教育版产品制作
由 Autodesk 教育版产品制作