myQ Commercial Gateway

MYQCOMM

myQ | LiftMaster

CONNECTED PROPERTY SOLUTIONS

The myQ® Commercial Gateway offers cellular and Ethernet connectivity, providing Internet access for LiftMaster Commercial Door and Gate Operators, Intercoms, and Door Controllers that need a reliable connection to the myQ platform, especially in locations without Wi-Fi® or where network security concerns are an issue.

The gateway is managed with the myQ platform and delivers a simple, easy-to-implement experience for the end user. It provides internet for select LiftMaster/myQ devices only and is compatible with myQ Community and myQ Facility.

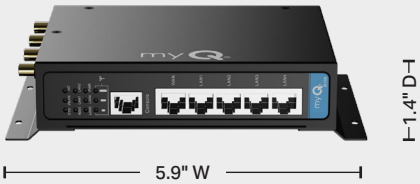

Popular Features

- Cellular connectivity
- LAN ports and 1 WAN port (Ethernet)
- Cellular can operate as the primary or failover connectivity option
- Integrated provisioning with myQ Facility or myQ Community
- Remote Device Management through myQ Facility or myQ Community platform
- NEMA 4 Box for outdoor mounting (Sold separately - not included or supplied)

Product Ecosystem

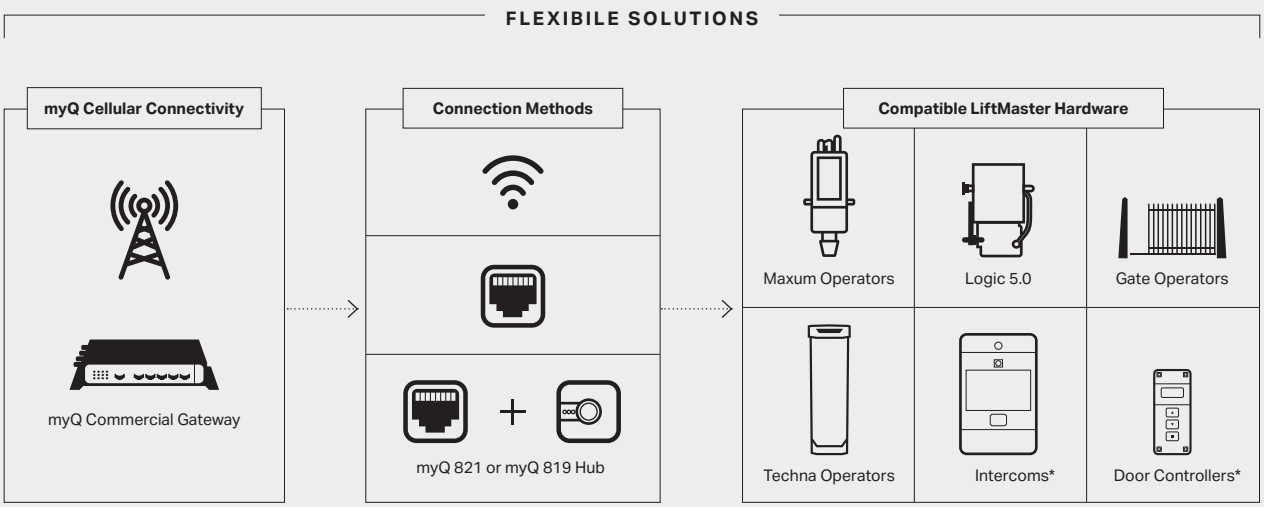

*Intercoms and Door Controllers are not compatible with the myQ 821 or myQ 819 Hub

myQ | LiftMaster

CONNECTED PROPERTY SOLUTIONS

Specifications

myQ Compatibility,
Supports myQ Facility, myQ Enterprise, and myQ Community

Ethernet
5x RJ45, 10/100/1000Mbps (1x WAN and 4x LAN)

Wi-Fi
2.4GHz, IEEE802.11 b/g/n, Wi-Fi LAN (WLAN) only, 2x Wi-Fi Antenna

4G LTE
LTE CAT4, Multi-Carrier Supported, 2x SIM Slots, 2x LTE Antenna

Indicator
Cellular Signal Strength Indicator, Power Indicator, System Indicator, Network Connectivity Indicator (INT), WLAN Indicator

What's Included
1 cellular gateway, 2 cellular antennas, 2 Wi-Fi antennas, 1 power adapter

Enclosure and Dimensions
5.9" W x 4.5" H x 1.4" D

Power
9-36V DC, Over-Current Protection, Reverse Polarity Protection

IP Rating
IP30

Device Management Platform
myQ

Operating Environment
-4˚F to 140˚F (-20˚C to 60˚C)

Warranty
1 Year

SKU (ordering information)
MYQCOMM

Device Connection

Connecting Device	Method
LiftMaster® door operators: MAXUM, DDO8900W, LJ8900W & Techna barrier gate arm operator	Connect wirelessly without a hub
Logic 5.0, Swing and Slide Gate Operators (and other devices requiring a hub)	Compatible with: LiftMaster 828LM Garage Door Opener Internet Gateway (Ethernet) & LiftMaster 821LMB Universal Smartphone Garage Door Controller (Wi-Fi)
LiftMaster Intercoms: CAPXLV2, CAPXM, CAPXS, CAPXLV	Connect with Ethernet or Wi-Fi
LiftMaster Door Controllers: CAP2D, CAP4AP, CAPXAP	CAP4AP and CAPXAP (Wi-Fi or Ethernet) & CAP2D (Ethernet)

How to Purchase

LiftMaster.com/myQ-commercial-gateway/p/MYQCOMM

Product Support

partner.LiftMaster.com/myQ-commercial-gateway/product-support

Setup and Provisioning Video

LiftMaster.com/myQ-commercial-gateway/setup

For Technical and Billing Support | 877.247.6764

© 2025 Chamberlain Group LLC. All Rights Reserved. | LMCENPGUSMYQCOMM 09/25

myQ and the myQ logo, LiftMaster and the LiftMaster logo are registered trademarks of Chamberlain Group LLC.
© 2025 All Rights Reserved. Wi-Fi® is a registered trademark of Wi-Fi Alliance. All rights reserved.

myQ | LiftMaster

CONNECTED PROPERTY SOLUTIONS