


T3SH775CK1PQ (Pre-wired Kit)

Access and Power Integration Solution for Software House



Altronix T3SH775CK1PQ is a 24-door access and power integration kit which includes Altronix power and sub-assemblies along with factory installed wire management and wire assemblies that are pre-configured with terminal blocks for Software House hardware. This unit provides ample power and dual voltage outputs to support Software House platform controllers and locking devices. The T3SH775CK1PQ accommodates up to one (1) iStar Ultra GCM/GCM G2 and three (3) iStar Ultra ACM. Trove Plus simplifies field installations and provides reliable, robust critical power and control for the most demanding applications.

SOFTWARE HOUSE

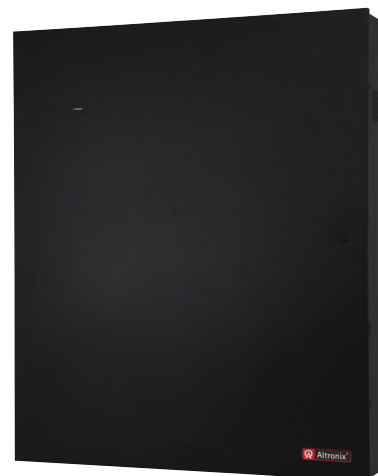

T3SH775CK1PQ includes 2 - eFlow104NB, 1 - eFlow102NB, 3 - ACMS8, 1 - LINQ8PD with finger duct and wire harnesses for iStar Ultra GCM/iStar Ultra GCM G2 and 3 - iStar Ultra ACM

Software House boards are not included

Key Features

- Accommodates the following Software House controllers:
 - 1 - iStar Ultra GCM/GCM G2 and 3 - iStar Ultra ACM
- Programmable Features:
 - Fail-safe, fail-secure or auxiliary outputs
 - High & low voltage & current monitoring by output
 - Battery back-up by output
 - Any combination of the above
 - Monitor power supply(ies) input for voltage & current limits
 - Programmable timer events, user levels
 - Enable or disable alerts by type
 - Programmable alert reporting delay
- Unit includes:
 - Removable backplane
 - 2" high finger duct for wire management
 - Custom wire assemblies for power distribution with terminal blocks for controller connections
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit)
 - Two (2) double knockouts 1.948" (1.5" Conduit) / 1.701" (1.25" Conduit)
 - Thirteen (13) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
 - AC Fail
 - Low Battery and Battery Presence
 - Low power shutdown
- 16 gauge galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- CE European Conformity
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Specifications

Power Supply 1 & 2 (eFlow104NB):

Input	
Voltage	120VAC, 60Hz, 4.5A max.
Input Fuse	6.3A/250V
Output	
Voltage	24VDC @ 10A
Auxiliary	1A (unswitched)
Protection	Overvoltage protection. Filtered and regulated

Power Supply 3 (eFlow102NB):

Input	
Voltage	120VAC, 60Hz, 3.5A max.
Input Fuse	5A/250V
Output	
Voltage	12VDC @ 10A
Auxiliary	1A (unswitched)
Protection	Overvoltage protection. Filtered and regulated

All Power Supplies:

Battery Charging

Capacity	12VDC/12AH (4 within enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous
Batteries are sold separately	

Fire Alarm Disconnect

Supervised	Latching or non-latching
EOL	10K Resistor

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 71-73% for 12V units and 70-75% for 24V units (depending on the power supply)
Prevents deep battery discharge

Indicators (LED)

AC Input	120VAC is present
DC Output	Powered
Battery	Discharged or not connected

Three (3) Dual Input Access Power Controllers (ACMS8):

Input	
Voltage	24VDC from eFlow104NB and 12VDC from eFlow102NB
Input Fuses	15A/32V

Outputs

Voltage	12 or 24VDC individually selectable
Eight (8) selectable 12VDC - 24VDC independently controlled outputs or eight (8) independently controlled Form "C" relay outputs:	
a)	Fail-Safe and/or Fail-Secure power outputs
b)	Form "C" Relays. 28VAC or VDC @ 2.5A Rated
c)	Auxiliary power outputs (unswitched)
d)	Any combination of the above

Any of the eight (8) fuse protected power outputs are selectable to follow power Input 1 or Input 2

Individual outputs may be set to OFF position for servicing

Output Fuses 3A/32V

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Blue LED	FACP disconnect is triggered

Individual voltage LEDs:

Green:	12VDC
Red:	24VDC

Network Power Distribution Module (LINQ8PD):

Input	
Voltage	12VDC from eFlow102NB
Input Fuses	15A/32V

Outputs

Fuse protected outputs
Any of the eight (8) fuse protected power outputs are selectable to follow power Input 1 or Input 2
Individual outputs may be set to OFF position for servicing
Output Fuses: 3A/32V

Status Monitoring

Power Supply output voltage and load, Voltage and load of each output
FACP trigger and reset status, Unit temperature (Celsius)
Power Supply AC and Battery status, Battery health

Reporting:

Windows Dashboard Alert messages
E-mail notifications, Event Log tracks history

Indicators (LED)

Bat Local	Charging current status
FACP	Triggered / Released
Input	Input signal
Out1 - Out8	Output status

Programming Features:

Power Supply(ies) voltage and load limits (High/Low)
FACP trigger type (wet or dry-NO/NC)
Input Function (FACP reset/tamper)
Output Reset Trigger (NO/NC)
Battery Monitor Configuration:
- Battery condition (Low/Normal/Missing)
- Service Date
Configurable Output Relay(s).
Individual Output Configuration:
- Device ID
- Voltage and Current Limits (High/Low)
- FACP Trigger Setting (latching/non-latching/inactive)
- Battery Backup

Fire Alarm Interface:

Supervised FACP disconnect (Latching or Non-Latching)
FACP reset (NC or NO)

T3SH775CK1PQ Kit:

Agency Listings

CE	European Conformity
----	---------------------

Physical and Environmental

Dimensions (H x W x D)

Enclosure: 36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)
Shipping: 40.75" x 35.25" x 12" (1035.1mm x 895.4mm x 304.8mm)

Weight (approx.)

Product	84.2 lb. (38.2 kg)
Shipping	97.5 lb. (44.22 kg)

Temperature

Operating	0°C to 49°C (32°F to 120°F)
Storage	- 20°C to 70°C (- 4°F to 158°F)


Relative Humidity

85% +/- 5%

BTU/Hr (approx.): 265 BTU/Hr.

T3SH775CK1PQ (Pre-wired Kit)

Access and Power Integration Solution for Software House

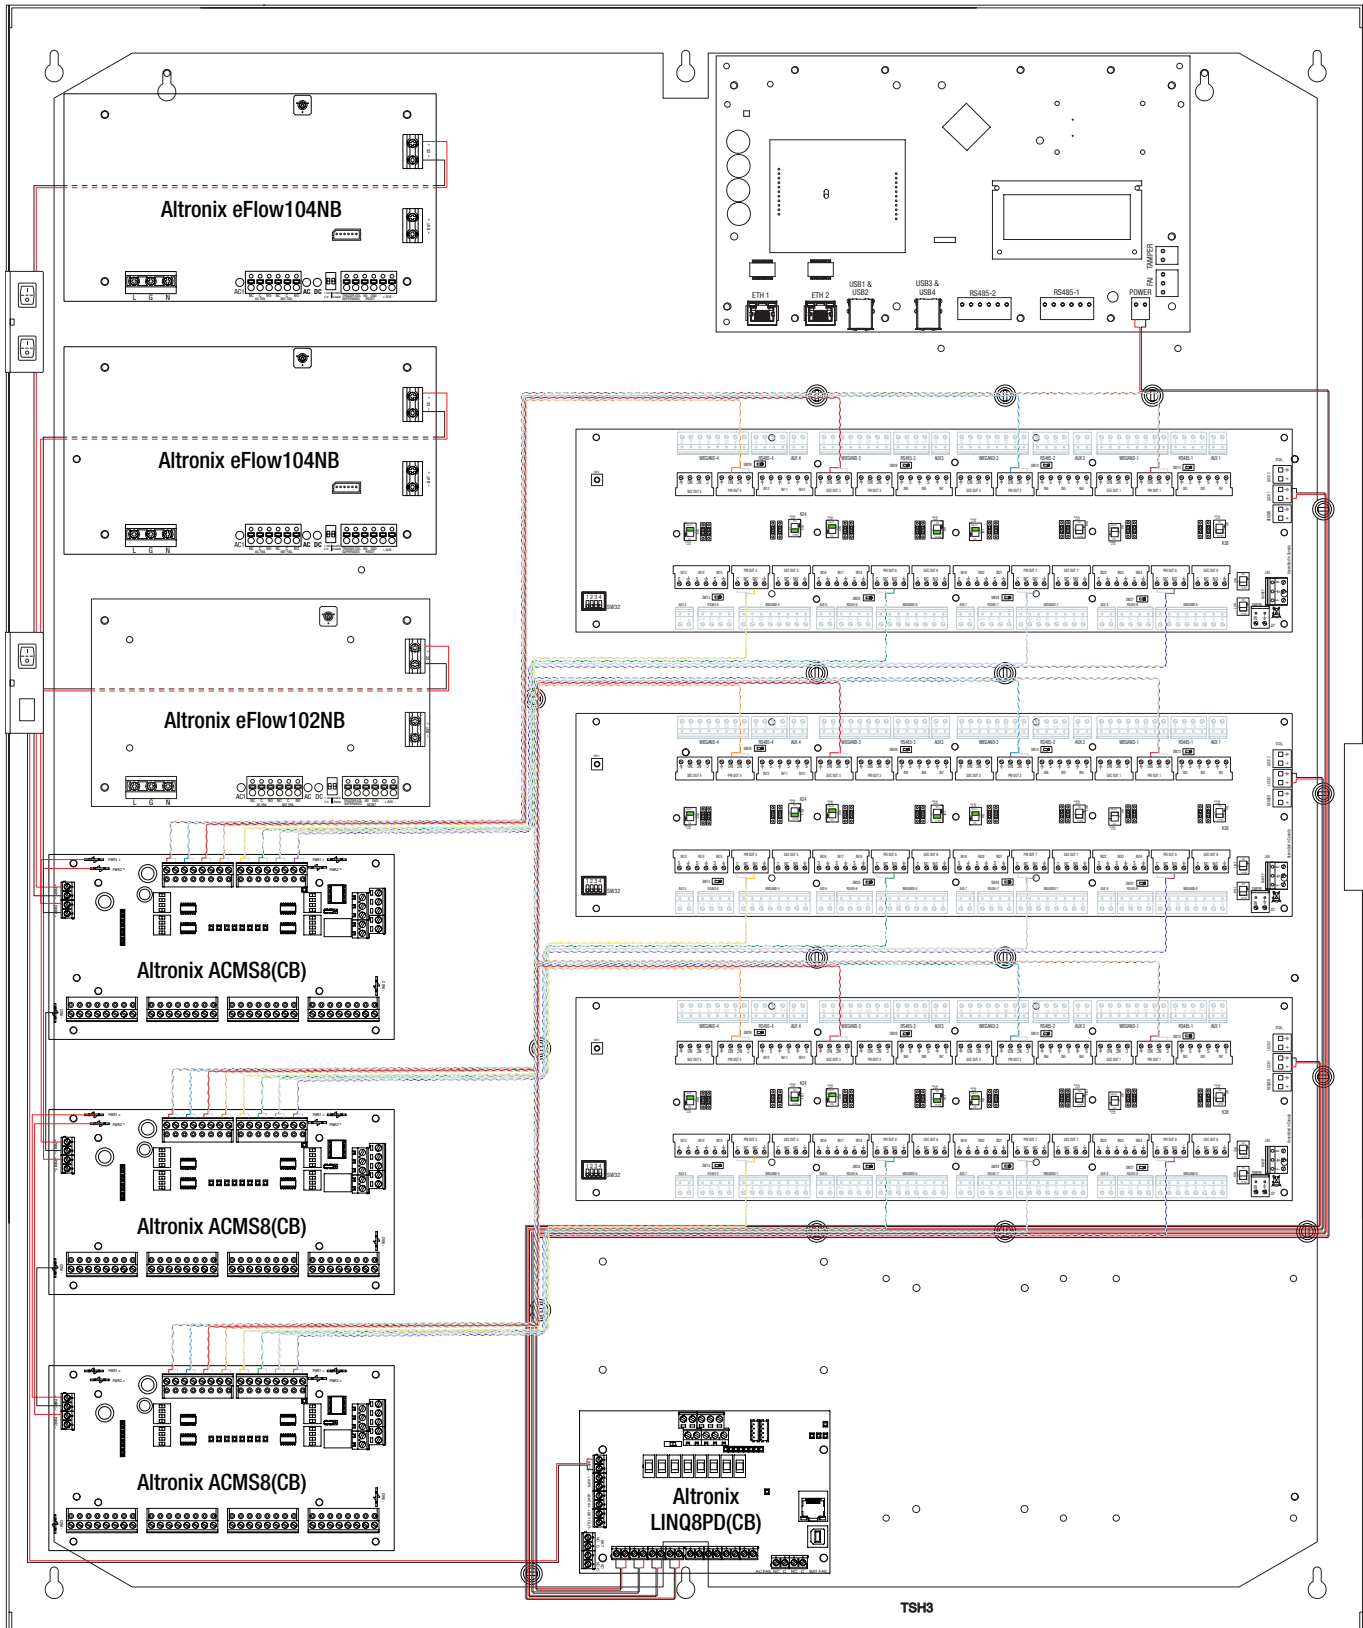

Accessories (order separately) —



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution


Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

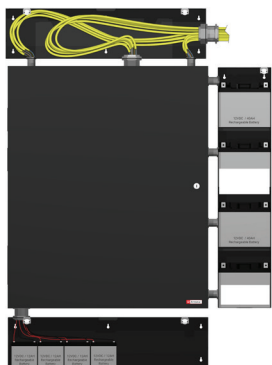

TROVE3BWC / TROVE3SWC - Battery/Wire Trough Enclosure

Altronix Trove3BWC and Trove3SWC are dual-purpose enclosures that can be used as wiring troughs or battery cabinets when mounted above or below (Trove3BWC) or on either side (Trove3SWC) of the Trove integrated power and access solution. The knockouts on the Trove3BWC and Trove3SWC have been strategically placed to line up with the Trove3 allowing for easy conduit connections between cabinets. Trove3BWC and Trove3SWC include cam locks and 2 tamper switches each to ensure access to wiring and batteries is secure.

Typical battery/wiring setup with Trove3 Enclosure (not included)

Dimensions and Drawing

Dimensions (H x W x D approximate)

36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)

