

10 AMP PILOT CONTROL DIN RAIL MOUNT RELAYS

SPECIFICATIONS



# Relays & Contact Type	One (1) SPDT Continuous Duty Coil
Expected Relay Life	10 million cycles minimum mechanical
Operating Temperature	-30 to 140° F
Humidity Range	5 to 95% (noncondensing)
Operate Time	20ms
Relay Status	LED On = Activated
Dimensions	2.76"H x 3.88"W x 0.78"D
Origin	Made of US and non-US parts
Terminal Strip	14-22 AWG wire
Gold Flash	Yes
Approvals	UL Listed, UL916, C-UL, CE, RoHS
Accessories	ADIN35, ADIN35ES
Contact Ratings	10 Amp Resistive @ 277 Vac 10 Amp Resistive @ 28 Vdc 480 VA Pilot Duty @ 240/277 Vac 480 VA Ballast @ 277 Vac <i>Not rated for Electronic Ballast</i> 600 Watt Tungsten @ 120 Vac (N/O) 240 Watt Tungsten @ 120 Vac (N/C) 1/3 HP @ 120-240 Vac (N/O) 1/6 HP @ 120-240 Vac (N/C) 1/4 HP @ 277 Vac (N/O) 1/8 HP @ 277 Vac (N/C)
Coil Current	33 mA @ 10 Vac 13 mA @ 10 Vdc 35 mA @ 12 Vac 15 mA @ 12 Vdc 46 mA @ 24 Vac 18 mA @ 24 Vdc 55 mA @ 30 Vac 20 mA @ 30 Vdc
Power and Control Voltage	10-30 Vac/dc ; 50-60 Hz Drop Out = 2.1 Vac / 2.8 Vdc Pull In = 9 Vac / 10 Vdc

ACCESSORIES (SOLD SEPARATELY)

ADIN35
DIN Rail Perforated
35mm x 7.5mm x 1mm




ADIN35ES
Pair of End Stops
for 35mm DIN Rail




RIBRL1C

DIN Rail Mount Relay
• 10 Amp SPDT
• 10-30 Vac/dc Coil

Replaceable Relay
(Model ARL1C)

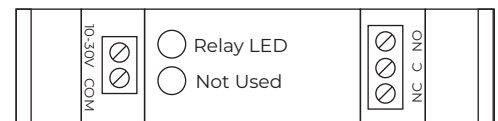

Open Lid this Side



RIBRL1C-NS

DIN Rail Mount Relay
• 10 Amp SPDT
• 10-30 Vac/dc Coil

No Socket
Non-Pluggable Relay



Relay LED

