




On-Q
8-Port PoE+ Switch
Part No. DA8800WH

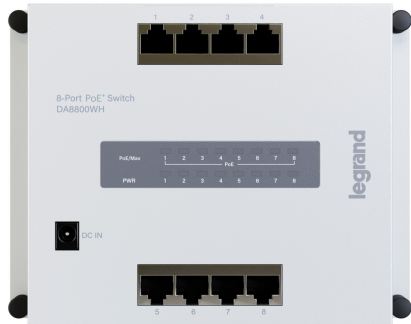

The DA8800WH On-Q Network Switch, a versatile and high-performance solution designed to meet the demands of modern networking environments. This switch is equipped with 8 PoE+ (Power over Ethernet Plus) ports, providing both data connectivity and power to compatible devices such as IP cameras, VoIP phones, and wireless access points. With front-facing power and status LEDs, energy-efficient Ethernet compliance, and an included power adapter, this switch ensures reliable performance and easy monitoring.

Features & Benefits

- 8 PoE+ ports (30W each)** provide power and connectivity without extra adapters. This simplifies installation, reduces cable clutter, and makes it easier to deploy devices in hard-to-reach locations.
- Perfect Fit for On-Q Enclosures:** Specifically designed to fit seamlessly within On-Q plastic enclosures, eliminating the hassle of mounting other branded switches.
- Robust Design:** Built with durability in mind, the switch features a sturdy metal chassis that protects internal components and ensures reliable operation in various environments, from small offices to large enterprise networks.
- Energy Efficient Ethernet Compliance (IEEE 802.3):** Designed to reduce power consumption during periods of low data activity, promoting energy efficiency.
- Power Adapter Included:** Comes with a power adapter to ensure the switch is ready for immediate use, providing a complete solution right out of the box.

Specifications

General Info

Product Line	On-Q	Application Sector	Residential
Type	Network Switch		

Dimensions

Product Width US	0.98 in	Product Weight US	1.95 lb
Product Depth US	0.98 in	Product Height US	4.92 in
Product Length US	6.39 in		

Listing Agencies / 3rd Party Agencies

CE Certified	Yes	FCC Compliant	Yes
--------------	-----	---------------	-----

Technical Information

Compatibility	On-Q Metal Enclosures, On-Q Plastic Enclosures	Number of Ports	8
Power Supply	100-240 V 50/60 Hz 1.6 A Max	Mounting Type	Plunger Grommet Fastner
Form Factor	Fixed Configuration	Operating Humidity	10-90% RH
Mounting	Enclosure Mounted		