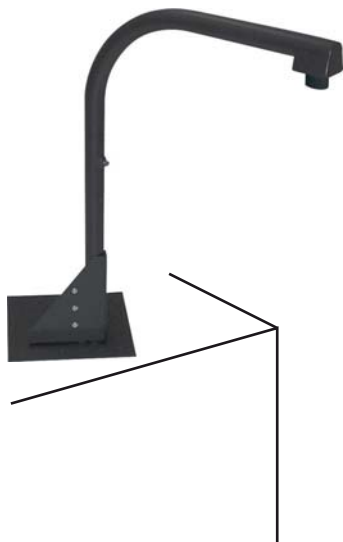


**FSRP3610-150**

Universal pedestal parapet available with 1.50" NPT pipe

TECHNICAL SPECIFICATIONS

**Universal pedestal parapet available with 1.50" NPT pipe**




This parapet is ideal for elevated surveillance. The mount can be adjusted 360°. It is made of very rigid and lightweight aluminium. IT can be solidly installed to any flat surface (roof, etc.) using 22 screws.

Fabrication:


Body:	All aluminum, 8 Ga.
Body standard finish:	Grey, black, white polyurethane coating
Weight:	11 lbs (5 kg)

External Dimensions:

Width:	13.00"	(330 mm)
Height:	37.95"	(964 mm)
Depth:	33.72"	(856 mm)

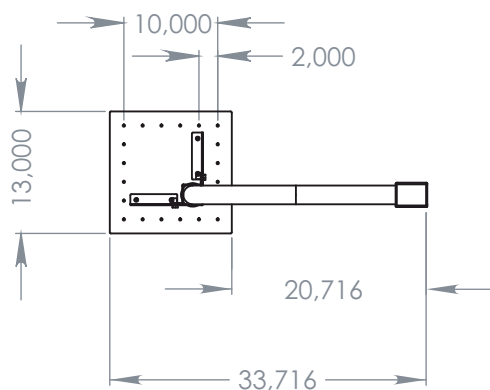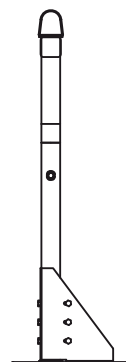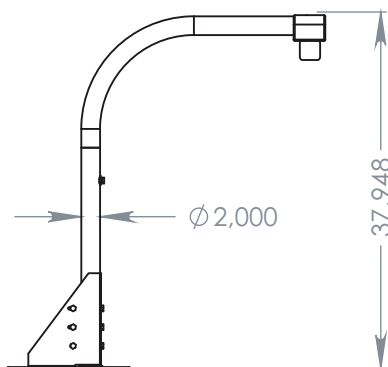


1

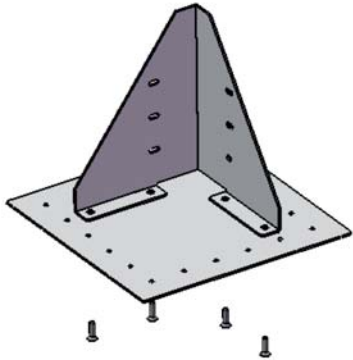


Attach the bracket to the base plate with the 4 supplied screws.

2

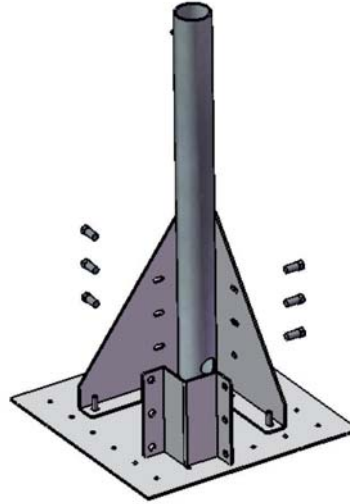


Attach the pole to the bracket with the 6 supplied screws.

3

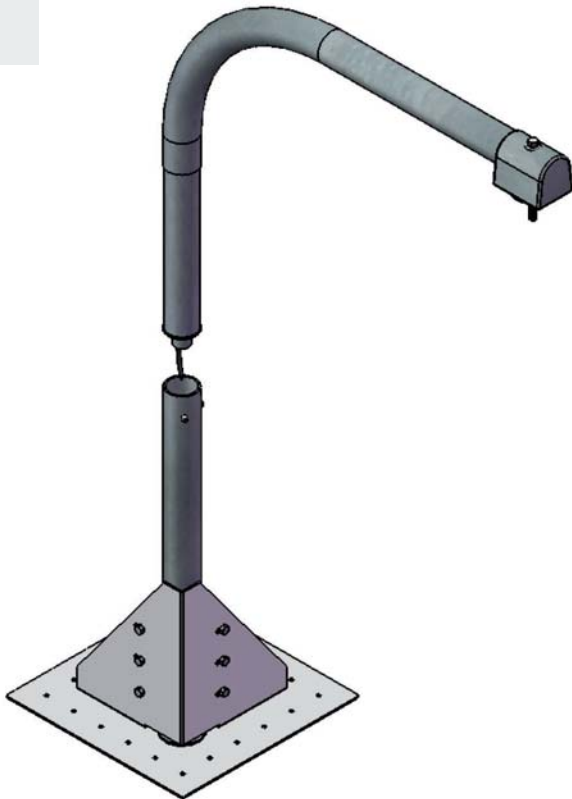

Run cables through the filter and inside the pipe.
Insert the top pipe into the bottom pipe.

4

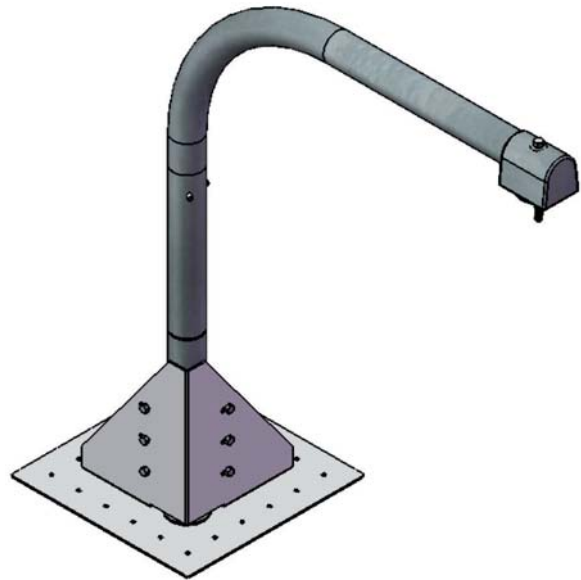

Fasten the two set screws with the supplied allen bit. Install the camera.