



► Model PMLMP and PMLST

Panel Mount Multifunctional LED Beacons

Model PMLST allows for a single steady light effect, while model PMLMP offers three different light effects (steady, flashing, or simulated strobe) controllable via independent electric contacts.

These models offer a self-extinguishing PC body that protects against vibrations, dust, and atmospheric elements. The device can be panel mounted through a 1.18-inch hole and secured with the provided locking ring.



LENS COLOR OPTIONS



FEATURES


- Available in 24 Vdc and 120 Vac
- Capable of producing 75-77 dBA at 10 ft (85-87 dBA at 1 m)
- Indoor use only
- Type 1 enclosure
- CSA Certified
- UL Listed

MODEL	VOLTAGE	FLASH RATE/MINUTE (FLASH MODE)	FLASH RATE/MINUTE (STROBE MODE)
PMLMP-012-024*	12-24 Vac/dc	150 (+/-10)	70 (+/-10)
PMLMP-048-240*	48-240 Vac	150 (+/-10)	70 (+/-10)
PMLST-012-024*	12-24 Vac/dc	N/A Steady	N/A Steady
PMLST-048-240*	90-240 Vac	N/A Steady	N/A Steady

* Indicates color: (A) Amber, (B) Blue, (C) Clear, (G) Green, (R) Red, or (Y) Yellow

MODEL	MAXIMUM OPERATING CURRENT (mA)						
	12 Vdc	24 Vdc	12 Vac	24 Vac	48 Vac	90 Vac	240 Vac
PMLMP	60	45	110	130	40	N/A	25
PMLST	25	25	30	45	N/A	20	35

Panel Mount Multifunctional LED Beacons (PMLMP and PMLST)

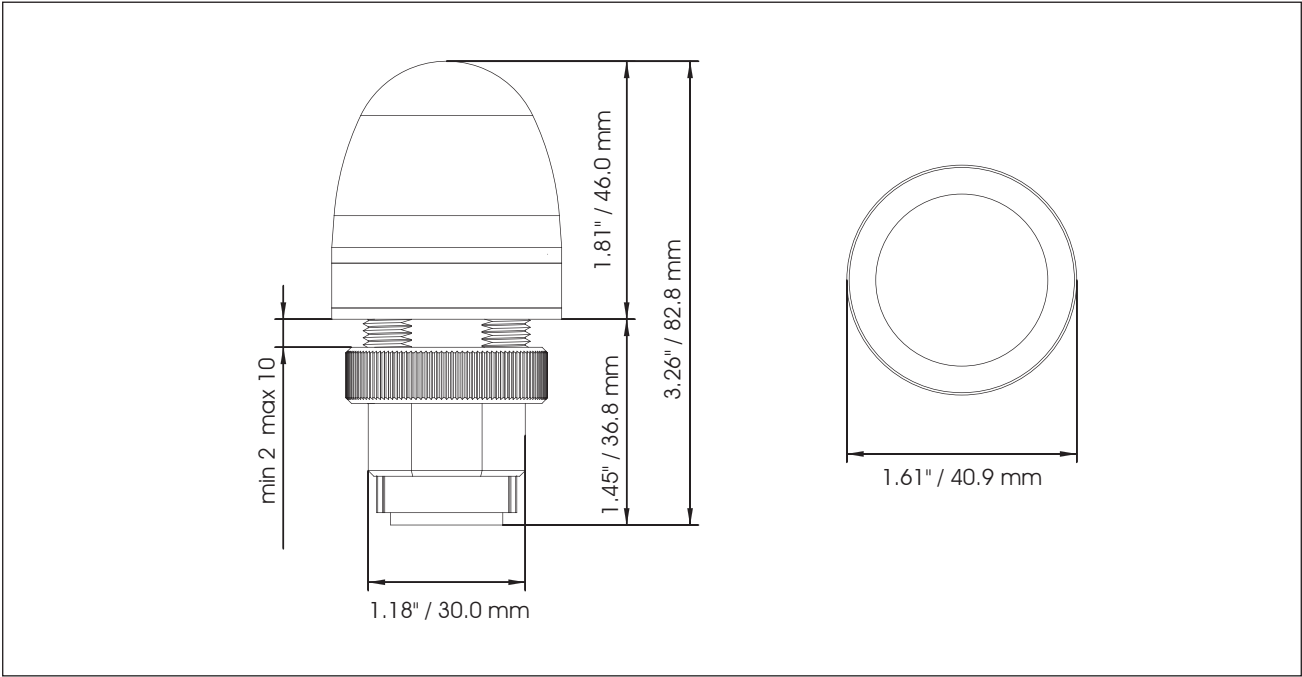

SPECIFICATIONS

Lamp Life:	50,000 Hours
Light Source:	LED
Operating Temperature Range:	-22° to 140°F (-30° to 60°C)
Net Weight:	1.44 oz (0.04 kg)
Shipping Weight:	5.44 oz (0.15 kg)
Height:	3.26 in (82.8 mm)
Height - above surface:	1.81 in (46.0 mm)
Diameter:	1.61 in (40.9 mm)

HOW TO ORDER

