


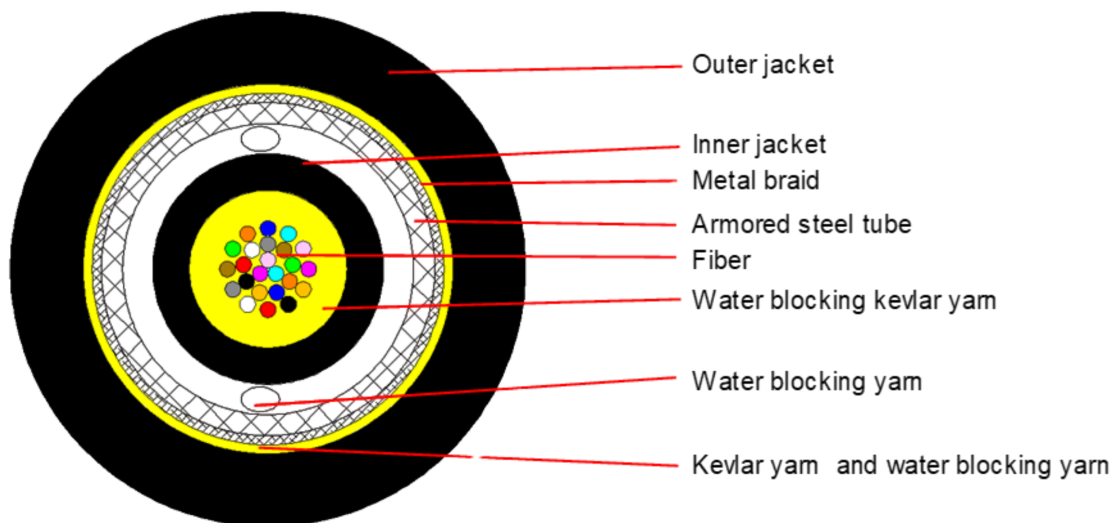

General Specifications

P/N	TF24-OS2-DB
Application and Uses	Direct Burial Dry Outside Plant, Aerial, Lashable
Outer Jacket Specifications / Color	HDPE Black
Fiber Category	Singlemode OS2
Fiber Type	Corning ClearCurve® LBL G657A2
Fiber Count / Grouping	24 Strand 1x24f
Construction	250 µm sub-unitized, water blocking kevlar yarn
Core/Cladding	9/125
Water Block	Yes
Armor	TiniFiber Micro Armor ^a + Steel Braid
Maximum Tensile Strength (Dynamic Static)	2670 N 800 N
Maximum Crush Resistance (Dynamic Static)	30 kN/m 8 kN/m
Minimum Bend Radius (Dynamic Static)	80D 20D
Nominal Outer Diameter	8.3mm ± 0.5(mm)
Installation Temperature	-10 to 60 °C (14 to 140 °F)
Operation Temperature	-40 to 75 °C (-40 to 167 °F)