


Part Number: TF6-OM3-PLO
6 Strand 900 µm Tight Buffer Multimode OM3 50/125 TiniFiber® Micro
Armor^a + Steel Braid BLACK PLENUM-UV (PVC) Indoor/Outdoor
Premise, Duct, Conduits, and Patch

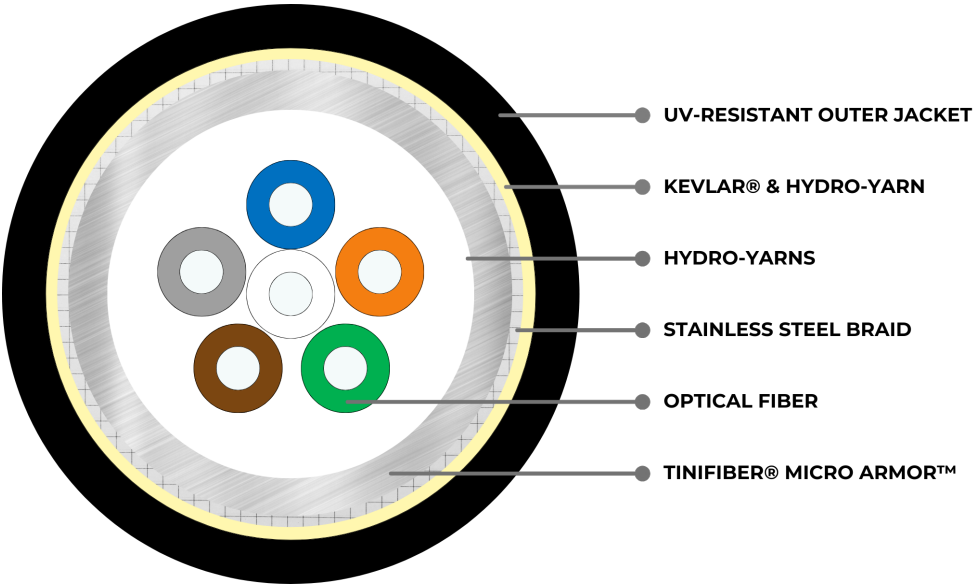

General Specifications

P/N	TF6-OM3-PLO
Application and Uses	Indoor/Outdoor Premise, Duct, Conduits, and Patch
Outer Jacket Specifications / Color	PLENUM-UV (PVC) BLACK
Fiber Category	Multimode OM3
Fiber Count / Grouping	6 Strand
Construction	900 µm Tight Buffer
Core/Cladding	50/125
Water Block	Yes
Aarmor	TiniFiber Micro Armor ^a + Steel Braid
Maximum Tensile Strength (Dynamic Static)	600 N 200 N
Maximum Crush Resistance (Dynamic Static)	30 kN/m 5 kN/m
Minimum Bend Radius (Dynamic Static)	20D 10D
Nominal Outer Diameter	6.0±0.5
Installation Temperature	0 to 60 iC (32 to 140 iF)
Operation Temperature	-15 to 60 iC (5 to 140 iF)