

HITACHI

Inspire the Next



PREMISE & FIBER OPTIC CABLE CATALOG

PREMISE & FIBER OPTIC CABLE

Since 1986, Hitachi Cable has been developing technologically advanced copper and fiber optic communication cables. Our dedication to engineering perfection is evident in the consistent quality and performance of all the cable products we manufacture. Through the development of high-performance cable products, such as the world's first UL verified 10-gigabit Ethernet Category 6A cable, Hitachi Cable has established itself as a leader in the industry. These products and the others found in this catalog are the result of Hitachi Cable's relentless desire to manufacture the finest communication cables in the world. After using our products, we are confident you will agree.



HITACHI
Inspire the Next

INTRO	• HCA Overview	2
	• Other HCA Products	6
COPPER	• Category 8 Copper	8
	• Category 7A Copper	10
	• Category 7 Copper	12
	• Category 6A Copper	14
	- Category 6A Indoor/Outdoor	20
	- Category 6A Outdoor	22
	• Category 6 Copper	24
	- Category 6 Indoor/Outdoor	34
	- Category 6 Outdoor	36
	• Category 5e Copper	38
FIBER	- Category 5e Outdoor	48
	• Category 3 Copper	50
	• Fiber Selection Guide	52
	• Indoor/Outdoor Power+™ Composite	54
	• Indoor Fiber Optic	56
	• Indoor NanoCore® Micro Distribution Fiber Optic	70
	• Indoor Armored Fiber Optic (including NanoCore®)	79
	• Indoor/Outdoor Armored Fiber Optic	86
	• Indoor/Outdoor Fiber Optic	88
	• Outdoor Fiber Optic	92
REFERENCE	• Outdoor Armored Fiber Optic	94
	• Color Codes	96
	• Code References	97
	• Applications	98
	• Standards	100
	• Configurations	101
	• Glossary	102
	• Part Number Reference	106
	• Installation Reference and Cable Ampacity chart	111



Hitachi Cable America has a long history of designing innovation into our cables. All of our designs are carefully engineered for peak performance, ease of use, and reliability. No other cable manufacturer goes to the lengths that Hitachi Cable does to ensure our products surpass our customers expectations.

Hitachi's Manufacturing Advantage

Hitachi Cable America (Hitachi Cable) never stops innovating. Whether it's installing the very latest in cable manufacturing technology, or designing and building custom equipment for a one of a kind cable, Hitachi Cable has the resources to maintain a technological edge over the competition. Our in-house staff of electrical engineers keep the pipeline full with new cable designs and can respond to inquiries for custom designs in an expeditious manner. And, since Hitachi Cable is currently ISO certified 9001-2015, you can be confident that all of our processes are materials are properly tracked and recorded.



On-site Copper Extrusion

The Manchester, NH facility is one of a handful of cable manufacturing facilities in the U.S. that performs on-site drawing of copper. When drawing copper, Hitachi Cable starts with 13 AWG solid copper conductor on custom built deploying devices, called Stems. The copper is pulled into the drawing mills where it is reduced to the appropriate size, conditioned in what is called the annealing process, then insulated with the appropriate insulation. Drawing our own copper allows us to better control the performance of the primary conductors and maximize overall cable performance.



Better Materials and Practices for a Better Earth

All the products manufactured at the Manchester, NH facility are compliant to EU Directive 2011/65/EU, also known as the Restriction of Hazardous Substances (RoHS2) which regulates the use of harmful materials such as lead, cadmium and mercury. All products are also REACH compliant. Reach (Registration, Evaluation, Authorization and Restriction of Chemicals), formerly referred to as EC 1907/2006, identifies multiple chemicals that have been found harmful to people and/or the environment. Hitachi Cable endeavors to be compliant to any and all environmental regulations as soon as possible and typically prior to their formal release.

Hitachi Cable has also made advancements in waste reduction in both the raw materials used and the packaging. In the past 8 years, the Manchester facility has reduced landfill bound waste by 90% and dramatically increased recycling efforts, including the implementation of an employee aluminum can and plastic bottle recycling program. Recently, Manchester converted its entire fork truck fleet from propane to electric, significantly reducing the facilities carbon footprint and eliminating the monthly use of over 1,800 pounds of propane.

The Advantage of Hitachi's Cable Packaging

When it comes to the performance of our products, Hitachi doesn't just evaluate the cable, we also evaluate the package from which it is dispensed. Hitachi's easy-payout boxes for Category 5e and Category 6 cables consistently receive positive reviews from distributors and installers. Designed with direct input from users, our boxes feature dual reinforced handles, vibrant, easy-to-read graphics and have proven to be as durable as the cable they contain. The boxes also have a product specific conduit fill chart printed right on the back of the box. When it comes to reels, we only use the best sanded wooden reels and durable thick-gauge plastic reels. When transporting large reels, we go to great lengths to ensure our product arrives safely. We don't cut corners when it comes to packaging and it shows.

New Products in Development

Hitachi and its significant research and development team are constantly releasing new products and developing future ones. As wireless applications and power over Ethernet grows in popularity, Ethernet cables are finding their way into a wide range of physical environments. From oil refineries in Mississippi to cell towers in Anchorage, Ethernet cables are being required to perform in some extremely harsh environments. To meet this growing need, Hitachi is constantly developing new cable constructions. Hitachi offers a vast selection of industrial Ethernet cables. Designs include high-temp shielded cables, oil and chemical resistant cables, high flex cables that can accommodate millions of flex cycles and tactical cables that are designed for extreme environments. To accommodate various Ethernet data rates, cables are available in Category 5e, 6 and 6A designs. These cables and more can be found in our Industrial Ethernet Solution brochure and on our website. With dozens of cable constructions available and more on the way, Hitachi Cable will have the solution you need.




The Open System Architecture Solution

Whether you are installing the highest-performing Category copper cabling or fiber optic infrastructure, there are a number of well-known brands available to choose from. What makes one brand a wiser choice than another? Which one offers maximum performance, while also providing the best value?

Open System Architecture (OSA) from Hitachi Cable America (Hitachi) provides world class performance using virtually any combination of Hitachi verified cables with verified connective hardware in the design of the network. The ANSI/TIA-568.2-D standard specifies the performance requirements of all network components and defines interoperability base-line limits to ensure that combinations of cable with connectivity will meet or exceed the system's intended application. By employing a Hitachi OSA solution, end users have the freedom to choose from a wide range of quality connectivity products that best meet their specific needs and be confident that the chosen solution will support all applications designed to operate over that solution and be backed by an industry-leading lifetime warranty*.

Beyond-The-Link Building Systems

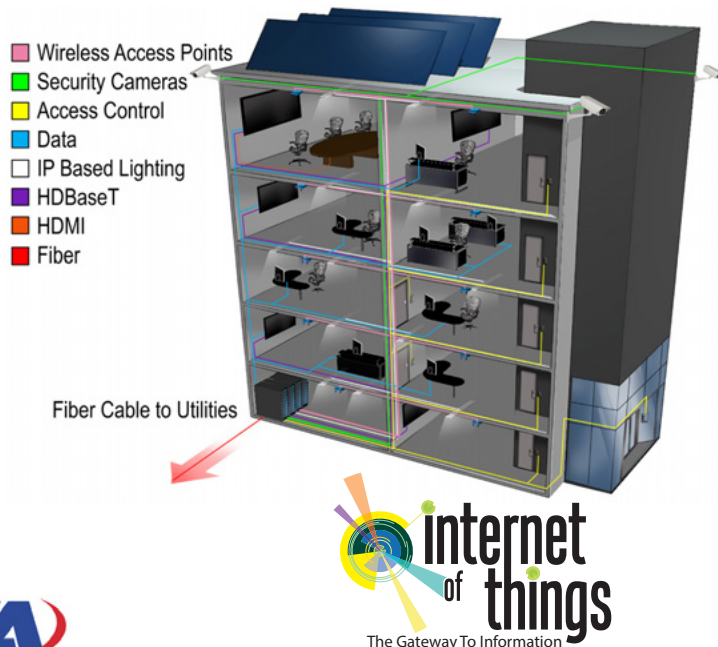

Hitachi Open System Architecture

- Provides for standards-based verifiable cable performance
- Enables a range of connectivity options
- Opens up competitive solution offerings
- Delivers substantial benefits to the end user



It's all in the Cable

In virtually all cable based communication links, it is the cable that determines the ultimate performance of that link. It is the cable, not the connectors, that establishes how well the applications that run over it will be supported. This is the reason why many cable manufacturers make different performance levels of Category 6 cable while jack and plug manufacturers make only one jack or plug to mate to them. The desirable headroom that results from the link is provided by the cable. With a growing list of applications for Category 6, many of them critical to a facility's operation, selecting a quality cable from an established manufacturer is recommended. Additionally, with an increase in counterfeit and unestablished brands flooding the market, protect your investment by sourcing only through trusted distribution channels.

Cable is Key!

- Cable is the highest cost component of passive infrastructures
- Cable determines margin of performance headroom in the link and channel
- Cable vendor should be lead warranty provider

*Lifetime Warranty available only through Hitachi certified installers.





Hitachi Cable Offers a LIFETIME WARRANTY

Hitachi Cable is pleased to offer a lifetime warranty on certified installations. The lifetime warranty, which is only available through Hitachi Cable Certified Installers and directly backed by Hitachi Cable, offers a product performance and application assurance warranty. This means that we guarantee that the solution will pass the appropriate category test for the life of the network as well as support all applications designed to operate over that solution. The warranty covers both the cables and all the connective hardware directly attached to the Hitachi cables. It also includes any labor that could be associated with a warranty claim. Only a manufacturer with exceptional confidence in their products would offer a warranty like this.



Hitachi Cable Warranted Systems feature:

- Compliance to TIA and ISO Cabling Standards
- Lifetime Product Performance Warranty
- Lifetime Applications Support Warranty
- Open Architecture Connectivity Specification
- One Point-of-Contact for all Warranty Features




Other Products offered by Hitachi Cable America



Cabling Solutions for Rail & Rolling Stock

Hitachi's presence in rail and rolling stock transportation goes back many decades. With major rail engagement in Europe, Japan, China, Korea, India and the Americas, we are well positioned to support this expanding mass transit segment, especially for Canbus and Ethernet cable applications meeting the NFPA130-2010 requirements.

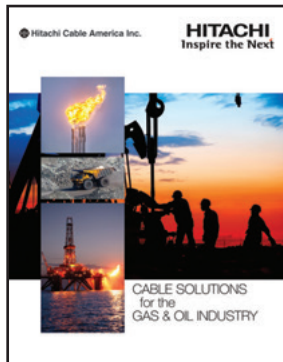


Cabling Solutions for Gas & Oil Industry

Cable solutions for the oil and gas segment range from tiny bundles of 38 AWG microcoaxials used in the ultrasound detection of pipeline flaws to large, ruggedized fiber optic cable bundles used for 'walking' drilling rigs. Our specialty cable designs feature cut-through resistant thermoplastic polyurethane jackets with outstanding petrochemical and solvent resistance.



Cabling Solutions for Mining Industry

Our mining cable designs feature cut through resistant thermoplastic polyurethane jackets for long application life. We offer "Leaky Coaxial" cables for wireless applications. Both fiber and copper communications cables are produced in the Americas. Rubber jacketed cable for large drum applications is available from our tried and true global production center in Japan.

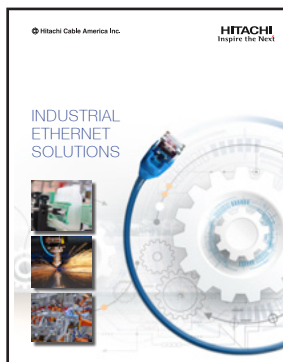


Cabling Solutions for Industrial Ethernet

To accommodate a wide variety of applications, Hitachi Cable offers dozens of unique designs intended to meet your specific needs. From high-flex to static, solid conductor to stranded, high and low temperature, oil and chemical resistant, we have the right industrial Ethernet solution.



Cabling Solutions for Defense

From our high-speed shielded Category 6A network cables to our armored fiber optic cables, Hitachi Cable's products are deployed not just in federal agencies across the U.S., but at its military installations both domestic and abroad.

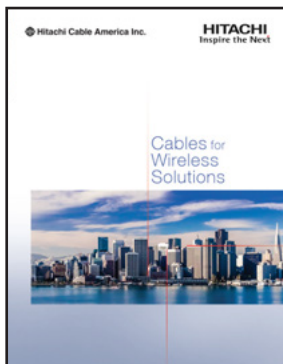

Cabling Solutions for Wireless Applications

As more and more devices go wireless, the importance of the cable infrastructure supporting those wireless networks grows as well. Hitachi Cable manufactures fiber optic cables, coaxial cables, shielded and unshielded twisted pair cables and hybrid cables to support wireless applications, such as Distributed Antenna System (DAS) and Fiber to the Antenna (FTTA).



Cat 8/8.2 S/FTP

HITACHI Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- Low Smoke Riser construction.
- Tested to 2 GHz.
- Verified to ANSI/TIA 568-C.2-1 Category 8 and ISO/IEC 11801 Category 8.2.
- Conductor pairs are individually wrapped in foil.
- Overall braid.
- CMR-LSZH version offers a halogen free design for improved environmental performance.

Packaging

- 1,000 foot (305m) reels
- Reverse sequential footage markings standard on a 1,000 packages.

Applications

- Including:
 - HDBase-T A & B
 - 40 Gigabit Ethernet (IEEE 802.3bq)
 - 25 Gigabit Ethernet (IEEE 802.3bq)
 - 10 Gigabit Ethernet (IEEE 802.3an)
 - 5 Gigabit Ethernet (IEEE 802.3bz)
 - 2.5 Gigabit Ethernet (IEEE 802.3bz)
 - Gigabit Ethernet (IEEE 802.3ab)
 - 100 Mbps Ethernet (IEEE 802.3u)
 - 1000 Mbps ATM
 - 622 Mbps ATM
 - 15W PoE (IEEE 802.3af)
 - 30W PoE+ (IEEE 802.3at)
 - 60W PoE++ (IEEE 802.3bt Type 3)
 - 100W PoE++ (IEEE 802.3bt Type 4)

Temp Range

- Storage Temperature
 - 40°C to +60°C (-40°F to +140°F)
- Installation Temperature
 - 0°C to +60°C (+32°F to +140°F)
- Operation Temperature
 - 20°C to +75°C (-4°F to +167°F)

Category 8/8.2 F/UTP (Riser-Low Smoke Zero Halogen)

c(UL)us Listed Type CMR (UL 1666), CSA Type FT44

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30307-8-XXY	4	.350	8.89	56.13	25.46

Building a Part Number

Base Part Number Ex.	No. of Conductors	Jacket Color	Reel Type
30307	8	XX	Y


Jacket Colors (XX):

Black(BK); Blue(BL); Brown(BR); Gray(GA); Green(GR); Red(RD); White(WH); Yellow(YE)

Reel Type (Y):

Reels(3)

Features

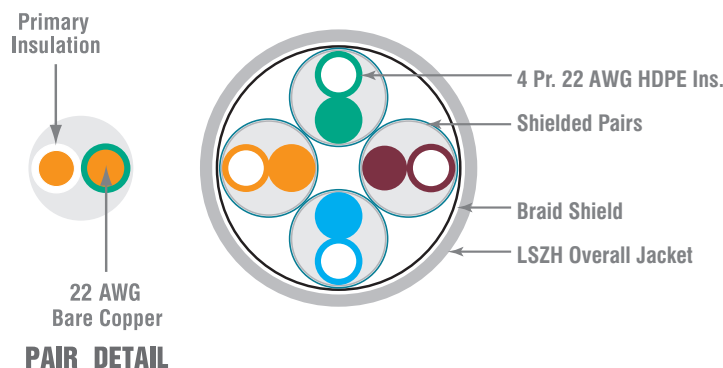

DIELECTRIC
MATERIALS

RISER

Primary Insulation

High-density Polyethylene

Overall Jacket

Zero-Halogen Flame-retardant Thermoplastic

Cable Ampacity Chart

Bundle Size	1	2-7	8-19	20-37	38-61	62-91	92-192
Cable Temp	75°C	75°C	75°C	75°C	75°C	75°C	75°C
22 AWG	3.0	1.8	1.2	0.9	0.8	0.7	0.6

The table above is derived from the one approved by the National Fire Protection Agency and used in the National Electrical Code, NFPA-70. The complete table can be found in sections 725.144 and 800 Communication Circuits of the code. The table identifies the ampacity of each conductor (in amperes) in a 4-pair Class 2 or Class 3 data cable. Ambient temperature used for development of the table is 30°C (86°F) with all conductors in all cables carrying current. The table is based on 60°C (140°F), 75°C (167°F) and 90°C (194°F) rated cables. All cable temps are operational temp ratings. Cables with temp ratings above 90c would deliver additional power handling capacity.

S/FTP Category 8/8.2

Electrical Characteristics

Maximum resistance unbalance	4% (Within Pairs), 5% (Between Pairs)
Maximum capacitance unbalance	99 pF/30 meters @ 1 KHz
Maximum delay skew	13.5ns/30 meters
Nominal velocity of propagation (NVP)	78%
Voltage Rating	300 Volts
Ampacity	Consult Cable Ampacity Chart opposite page.

Transmission Specifications

ANSI/TIA-568.2-D Category 8 all values are dB/30m

	Ins. Loss	NEXT	PS NEXT	ACR	PSACR	ACRF	PSACRF	TCL	ELTCTL	Return Loss	CA (Type1)
Freq. (MHz)	Max	Min	Min	Cal. Min	Cal. Min	Min	Min	Min	Min	Min	Min
1.0	2.00	75.30	72.30	73.30	70.30	75.00	76.00	40.00	40.00	20.00	ns
4.0	2.00	66.27	63.27	64.27	61.27	66.96	63.96	40.00	27.96	23.01	ns
8.0	2.00	61.75	58.75	59.75	56.75	60.94	57.94	36.45	21.94	24.52	ns
10.0	2.00	60.30	57.30	58.30	55.30	59.00	56.00	35.00	20.00	25.00	ns
16.0	2.20	57.24	54.24	55.04	52.04	54.92	51.92	31.94	15.92	25.00	ns
20.0	2.46	55.78	52.78	53.32	50.32	52.98	49.98	30.48	13.98	25.00	ns
25.0	2.75	54.33	51.33	51.58	48.58	51.04	48.04	29.03	12.04	25.00	ns
31.25	3.08	52.88	49.88	49.80	46.80	49.10	46.10	27.58	10.10	25.00	55.00
62.5	4.37	48.36	45.36	43.99	40.99	43.08	40.08	23.06	5.00	23.64	55.00
100.0	5.56	45.30	42.30	39.74	36.74	39.00	36.00	20.00	5.00	22.21	55.00
200.0	7.94	40.78	37.78	32.84	29.84	32.98	29.98	15.48	5.00	20.11	48.98
300.0	9.81	38.14	35.14	28.34	25.34	29.46	26.46	12.84	5.00	18.87	45.46
400.0	11.40	36.27	33.27	24.87	21.87	26.96	23.96	10.97	5.00	18.00	42.96
500.0	12.83	34.82	31.82	21.99	18.99	25.02	22.02	9.52	5.00	17.32	41.02
600.0	14.13	33.63	30.63	19.50	16.50	23.44	20.44	8.33	5.00	16.77	39.44
700.0	15.34	32.62	29.62	17.28	14.28	22.10	19.10	7.32	5.00	16.30	38.10
800.0	16.48	31.75	28.75	15.28	12.28	20.94	17.94	7.00	5.00	15.89	36.94
900.0	17.55	30.99	27.99	13.43	10.43	19.92	16.92	7.00	5.00	15.53	35.92
1000.0	18.58	30.30	27.30	11.72	8.72	19.00	16.00	7.00	5.00	15.21	35.00
1100.0	19.56	29.68	26.68	10.12	7.12	18.17	15.17	7.00	5.00	14.92	34.17
1200.0	20.51	29.11	26.11	8.60	5.60	17.42	14.42	7.00	5.00	14.66	33.42
1300.0	21.42	28.59	25.59	7.17	4.17	16.72	13.72	7.00	5.00	14.42	32.72
1400.0	22.31	28.11	25.11	5.80	2.80	16.08	13.08	7.00	5.00	14.19	32.08
1500.0	23.17	27.66	24.66	4.49	1.49	15.48	12.48	7.00	5.00	13.98	31.48
1600.0	24.00	27.24	24.24	3.24	0.24	14.92	11.92	7.00	5.00	13.79	30.92
1700.0	24.82	26.84	23.84	2.03		14.39	11.39	7.00	5.00	13.60	30.39
1800.0	25.61	26.47	23.47	0.86		13.89	10.89	7.00	5.00	13.43	29.89
1900.0	26.39	26.12	23.12			13.42	10.42	7.00	5.00	13.26	29.42
2000.0	27.15	25.78	22.78			12.98	9.98	7.00	5.00	13.11	28.98

Not all Characteristics are shown. Refer to ANSI/TIA 568-C.2-1 for complete list of all required Characteristics and their limits. Discrete values are for information only. Equations for swept frequencies govern limits.

Note: Also meets Category 8.2. Refer to ISO/IEC 11801 (IEC 61156-9) for Characteristics and their limits.

Copper

Cat 7A S/FTP

HITACHI Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- Low Smoke Plenum construction.
- Tested to 1 GHz.
- Compliant to ISO 11801 Class FA (Category 7A) Requirements.
- Conductor pairs are individually wrapped in foil.
- Overall braid.

Packaging

- 1,000 foot (305m) reels
- Reverse sequential footage markings standard on a 1,000 packages.

Applications

- Including:
 - HDBase-T A & B
 - 10 Gigabit Ethernet (IEEE 802.3an)
 - 5 Gigabit Ethernet (IEEE 802.3bz)
 - 2.5 Gigabit Ethernet (IEEE 802.3bz)
 - Gigabit Ethernet (IEEE 802.3ab)
 - 100 Mbps Ethernet (IEEE 802.3u)
 - 1000 Mbps ATM
 - 622 Mbps ATM
 - 15W PoE (IEEE 802.3af)
 - 30W PoE+ (IEEE 802.3at)
 - 60W PoE++ (IEEE 802.3bt Type 3)
 - 100W PoE++ (IEEE 802.3bt Type 4)

Temp Range

- Storage Temperature
 - 40°C to +60°C (-40°F to +140°F)
- Installation Temperature
 - 0°C to +60°C (+32°F to +140°F)
- Operation Temperature
 - Plenum**
 - 20°C to +105°C (-4°F to +221°F)
 - Riser/Low Smoke Halogen Free**
 - 20°C to +75°C (-4°F to +167°F)

Category 7A S/FTP (Plenum)

c(UL)us Listed Type CMP (UL 910), CSA Type FT6

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in. mm	CABLE WEIGHT lbs/1000ft kg/305m
30250-8-XXY	4	.326 8.28	57.10 25.90

Category 7A S/FTP (Riser-Low Smoke Zero Halogen)

c(UL)us Listed Type CMR (UL 1666), CSA Type FT44

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in. mm	CABLE WEIGHT lbs/1000ft kg/305m
30305-8-XXY	4	.325 8.25	55.10 24.99

Building a Part Number

Base Part Number Ex.	No. of Conductors	Jacket Color	Reel Type
30250	8	XX	Y


Jacket Colors (XX):

Black(BK); Blue(BL); Brown(BR); Gray(GA); Green(GR); Red(RD); White(WH); Yellow(YE)

Reel Type (Y):

Reels(3)

Features

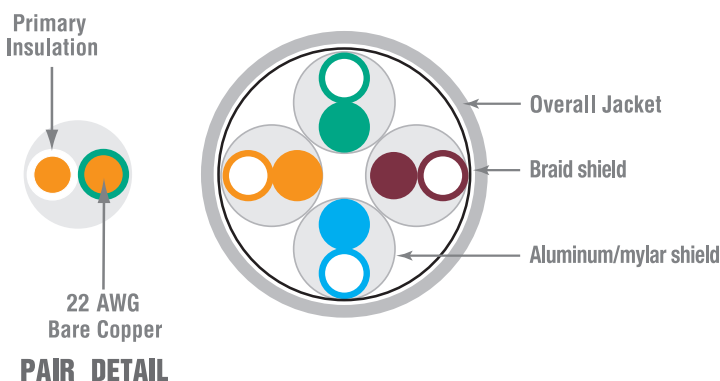

DIELECTRIC MATERIALS	PLENUM	RISER
Primary Insulation	Plenum-rated fluoropolymer	High density polyethylene
Overall Jacket	Low-smoke, flame-retardant thermoplastic	flame-retardant thermoplastic

S/FTP Category 7A

Copper

Electrical Characteristics

Maximum resistance unbalance	2% (Within Pairs), 4% (Between Pairs)
Maximum capacitance unbalance	160 pF/100 meters
Maximum delay skew	25 ns/100 meters
Nominal velocity of propagation (NVP)	82%
Voltage Rating	300 Volts
LP Rating (UL) - CMP	.9 Amps/conductor

Cable Ampacity Chart														
Bundle Size	1		2-7		8-19		20-37		38-61		62-91		92-192	
Cable Temp	75°C	90°C	75°C	90°C	75°C	90°C	75°C	90°C	75°C	90°C	75°C	90°C	75°C	90°C
22 AWG	3.0	3.0	1.8	2.1	1.2	1.4	0.9	1.1	0.8	0.9	0.7	0.8	0.6	0.7
The table above is derived from the one approved by the National Fire Protection Agency and used in the National Electrical Code, NFPA-70. The complete table can be found in sections 725.144 and 800 Communication Circuits of the code. The table identifies the ampacity of each conductor (in amperes) in a 4-pair Class 2 or Class 3 data cable. Ambient temperature used for development of the table is 30°C (86° F) with all conductors in all cables carrying current. The table is based on 60°C (140°F), 75°C (167°F) and 90°C (194°F) rated cables. All cable temps are operational temp ratings. Cables with temp ratings above 90c would deliver additional power handling capacity.														



Transmission Specifications

ANSI/TIA-568.2-D IEC 61156-5, 2nd ed. Category 7A Compliant

	Ins. Loss	NEXT	PS NEXT	ACR	PSACR	ACRF	PS ACRF	TCL	ELTCTL	Return Loss	CA (Type1)
Freq. (MHz)	Max	Min	Min	Cal. Min	Cal. Min	Min	Min	Min	Min	Min	Min
4	3.7	78.0	75.0	74.3	71.3	78.0	75.0	34.0	23.0	23.0	-
8	5.2	78.0	75.0	72.8	69.8	77.2	74.2	31.0	16.9	24.5	-
10	5.8	78.0	75.0	72.2	69.2	75.3	72.3	30.0	15.0	25.0	-
16	7.3	78.0	75.0	70.7	67.7	71.2	68.2	28.0	10.9	25.0	-
20	8.2	78.0	75.0	69.8	66.8	69.3	66.3	27.0	9.0	25.0	-
25	9.2	78.0	75.0	68.8	65.8	67.3	64.3	26.0	7.0	24.3	-
31.25	10.3	78.0	75.0	67.7	64.7	65.4	62.4	25.1	5.1	23.6	85.0
62.5	14.6	78.0	75.0	63.4	60.4	59.4	56.4	22.0	-	21.5	85.0
100	18.5	75.4	72.4	56.9	53.9	55.3	52.3	20.0	-	20.1	85.0
200	26.5	70.9	67.9	44.4	41.4	49.3	46.3	17.0	-	18.0	79.0
300	32.7	68.2	65.2	35.6	32.6	45.8	42.8	-	-	17.3	75.5
400	38.0	66.4	63.4	28.4	25.4	43.3	40.3	-	-	17.3	73.0
500	42.8	64.9	61.9	22.2	19.2	41.3	38.3	-	-	17.3	71.0
600	47.1	63.7	60.7	16.6	13.6	39.7	36.7	-	-	17.3	69.4
700	51.1	62.7	59.7	11.6	8.6	38.4	35.4	-	-	17.3	68.1
800	54.9	61.9	58.8	7.0	3.9	37.2	34.2	-	-	17.3	66.9
900	58.5	61.1	58.1	2.6	-	36.2	33.2	-	-	17.3	65.9
1000	61.9	60.4	57.4			35.3	32.3			17.3	65.0

All values are dB/100m.

Cat 7 S/FTP

Copper

HITACHI Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- Low Smoke Plenum construction.
- Tested to 600 MHz.
- Compliant to ISO 11801, Class F (Category 7) Requirements.
- Conductor pairs are individually wrapped in foil.
- Overall braid.

Packaging

- 1,000 foot (305m) reels
- Reverse sequential footage markings standard on a 1,000 packages.

Applications

- Including:
 - HDBase-T A & B
 - 10 Gigabit Ethernet (IEEE 802.3an)
 - 5 Gigabit Ethernet (IEEE 802.3bz)
 - 2.5 Gigabit Ethernet (IEEE 802.3bz)
 - Gigabit Ethernet (IEEE 802.3ab)
 - 100 Mbps Ethernet (IEEE 802.3u)
 - 1000 Mbps ATM
 - 622 Mbps ATM
 - 15W PoE (IEEE 802.3af)
 - 30W PoE+ (IEEE 802.3at)
 - 60W PoE++ (IEEE 802.3bt Type 3)
 - 100W PoE++ (IEEE 802.3bt Type 4)

Temp Range

- Storage Temperature
 - 40°C to +60°C (-40°F to +140°F)
- Installation Temperature
 - 0°C to +60°C (+32°F to +140°F)
- Operation Temperature
 - Plenum**
 - 20°C to +105°C (-4°F to +221°F)
 - Riser/Low Smoke Halogen Free**
 - 20°C to +75°C (-4°F to +167°F)

Category 7 S/FTP (Plenum)

c(UL)us Listed Type CMP (UL 910), CSA Type FT6

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30245-8-XXY	4	.326	8.28	57.10	25.90

Category 7 S/FTP (Riser-Low Smoke Zero Halogen)

c(UL)us Listed Type CMR (UL 1666), CSA Type FT44

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30319-8-XXY	4	.325	8.25	55.10	24.99

Building a Part Number

Base Part Number Ex.	No. of Conductors	Jacket Color	Reel Type
30245	8	XX	Y

Jacket Colors (XX):


Black(BK); Blue(BL); Brown(BR); Gray(GA); Green(GR); Red(RD); White(WH); Yellow(YE)

Reel Type (Y):

Reels(3)


Features

Primary
Insulation



22 AWG
Bare Copper

PAIR DETAIL



Overall Jacket

Braid shield

Aluminum/mylar shield

DIELECTRIC
MATERIALS

PLENUM

RISER

Primary Insulation

Plenum-rated fluoropolymer

High density polyethylene

Overall Jacket

Low-smoke, flame-retardant thermoplastic

flame-retardant thermoplastic

Hitachi Cable America reserves the right to revise any specifications.

S/FTP Category 7

Copper

Electrical Characteristics

Maximum resistance unbalance	2% (Within Pairs), 4% (Between Pairs)
Maximum capacitance unbalance	160 pF/100 meters
Maximum delay skew	25 ns/100 meters
Nominal velocity of propagation (NVP)	82%
Voltage Rating	300 Volts
LP Rating (UL) - CMP	.9 Amps/conductor

Cable Ampacity Chart														
Bundle Size	1		2-7		8-19		20-37		38-61		62-91		92-192	
Cable Temp	75°C	90°C	75°C	90°C	75°C	90°C	75°C	90°C	75°C	90°C	75°C	90°C	75°C	90°C
22 AWG	3.0	3.0	1.8	2.1	1.2	1.4	0.9	1.1	0.8	0.9	0.7	0.8	0.6	0.7

The table above is derived from the one approved by the National Fire Protection Agency and used in the National Electrical Code, NFPA-70. The complete table can be found in sections 725.144 and 800 Communication Circuits of the code. The table identifies the ampacity of each conductor (in amperes) in a 4-pair Class 2 or Class 3 data cable. Ambient temperature used for development of the table is 30°C (86°F) with all conductors in all cables carrying current. The table is based on 60°C (140°F), 75°C (167°F) and 90°C (194°F) rated cables. All cable temps are operational temp ratings. Cables with temp ratings above 90c would deliver additional power handling capacity.



Transmission Specifications

ANSI/TIA-568.2-D, IEC 61156-5, 2nd ed. Category 7 Compliant

	Ins. Loss	NEXT	PS NEXT	ACR	PSACR	ACRF	PS ACRF	TCL	ELTCTL	Return Loss	CA (Type2)
Freq. (MHz)	Max	Min	Min	Cal. Min	Cal. Min	Min	Min	Min	Min	Min	Min
1	2.0	78.0	75.0	76.0	73.0	78.0	75.0	40.0	35.0	-	-
4	3.7	78.0	75.0	74.3	71.3	78.0	75.0	34.0	23.0	-	-
8	5.2	78.0	75.0	72.8	69.8	77.2	74.2	31.0	16.9	-	-
10	5.9	78.0	75.0	72.1	69.1	75.3	72.3	30.0	15.0	-	-
16	7.4	78.0	75.0	70.6	67.6	71.2	68.2	28.0	10.9	-	-
20	8.3	78.0	75.0	69.7	66.7	69.3	66.3	27.0	9.0	25.0	-
25	9.3	78.0	75.0	68.7	65.7	67.3	64.3	26.0	7.0	24.3	-
31.25	10.4	78.0	75.0	67.6	64.6	65.4	62.4	25.1	-	23.6	85.0
62.5	14.9	75.5	72.5	60.6	57.6	59.4	56.4	22.0	-	21.5	85.0
100	19.0	72.4	69.4	53.4	50.4	55.3	52.3	20.0	-	20.1	85.0
200	27.5	67.9	64.9	40.4	37.4	49.3	46.3	17.0	-	18.0	79.0
250	31.0	66.4	63.4	35.5	32.5	47.3	44.3	16.0	-	17.3	77.0
300	34.2	65.2	62.2	31.1	28.1	45.8	42.8	-	-	17.3	75.5
400	40.0	63.4	60.4	23.4	20.4	43.3	40.3	-	-	17.3	73.0
500	45.3	61.9	58.9	16.7	13.7	41.3	38.3	-	-	17.3	71.0
600	50.1	60.7	57.7	10.6	7.6	39.7	36.7	-	-	17.3	69.4
600	50.1	60.7	57.7	10.6	7.6	39.7	36.7	-	-	17.3	39.4

All values are dB/100m.

Cat 6A Supra 10G™ F/UTP

HITACHI Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant
- Made in USA.
- UL Verified.
- Low Smoke Plenum construction.
- Tested from 1 to 660 MHz.
- Small O.D. allows more cables per conduit.
- Proven shield technology improves RFI, EMI and alien crosstalk performance.

Packaging

- 1,000 foot (305m) reels
- Reverse sequential footage markings standard on a 1,000 packages.

Options

- Available in LSZH

Applications

- Including:
- HDBase-T A & B
- 10 Gigabit Ethernet (IEEE 802.3an)
- 5 Gigabit Ethernet (IEEE 802.3bz)
- 2.5 Gigabit Ethernet (IEEE 802.3bz)
- Gigabit Ethernet (IEEE 802.3ab)
- 100 Mbps Ethernet (IEEE 802.3u)
- 1000 Mbps ATM
- 622 Mbps ATM
- 15W PoE (IEEE 802.3af)
- 30W PoE+ (IEEE 802.3at)
- 60W PoE++ (IEEE 802.3bt Type 3)
- 100W PoE++ (IEEE 802.3bt Type 4)

Temp Range

- Storage Temperature
-40°C to +60°C (-40°F to +140°F)
- Installation Temperature
0°C to +60°C (+32°F to +140°F)
- Operation Temperature
Plenum
-20°C to +90°C (-4°F to +194°F)
Riser
-20°C to +75°C (-4°F to +167°F)

Supra 10G 6A F/UTP (Plenum)

c(UL)us Listed Type CMP (UL 910), CSA Type FT6

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30233-8-XXY	4	.275	6.98	40.34	18.29

Supra 10G 6A F/UTP (Riser)

c(UL)us Listed Type CMR (UL 1666), CSA Type FT4

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30234-8-XXY	4	.28	7.11	39.02	17.70

Building a Part Number

Base Part Number Ex.	No. of Conductors	Jacket Color	Reel Type
30233	8	XX	Y


Jacket Colors (XX):

Black(BK); Blue(BL); Brown(BR); Gray(GA); Green(GR); Red(RD); White(WH); Yellow(YE)

Reel Type (Y):

Reels(3)

Features

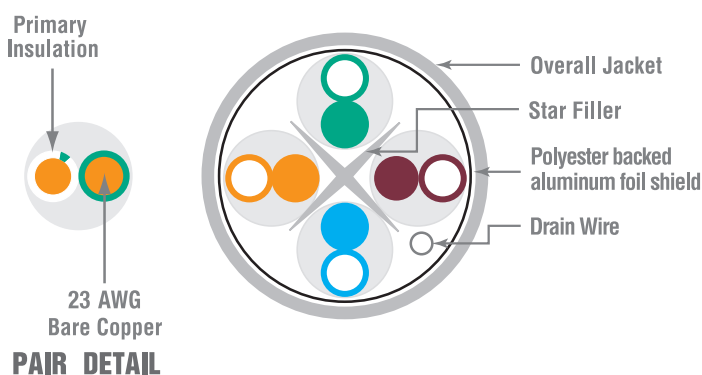

DIELECTRIC
MATERIALS

Primary Insulation

Overall Jacket

Star Filler

RISER

Polyolefin

Flame-retardant thermoplastic

Flame-retardant thermoplastic

PLENUM

Plenum-rated fluoropolymer

Low-smoke, flame-retardant thermoplastic

Plenum-rated polymer

Hitachi Cable America reserves the right to revise any specifications.

Enhanced F/UTP Category 6A

Electrical Characteristics

Input impedance	100 ± 15Ω (1.0 to 100 MHz) 100 ± 20Ω (100 to 250 MHz) 100 ± 25Ω (251 to 500 MHz)
Maximum resistance unbalance	3%
Maximum capacitance unbalance	330 pF/100 meters
Maximum delay skew	45 ns/100 meters
Nominal velocity of propagation (NVP)	68%, riser 70%, plenum
Voltage Rating	300 Volts
LP Rating (UL) - CMP	.6 Amps/conductor

Cable Ampacity Chart														
Bundle Size	1		2-7		8-19		20-37		38-61		62-91		92-192	
Cable Temp	75°C	90°C	75°C	90°C	75°C	90°C	75°C	90°C	75°C	90°C	75°C	90°C	75°C	90°C
23 AWG	2.5	2.5	1.5	1.7	1.1	1.7	0.8	0.9	0.7	0.8	0.7	0.8	0.5	0.6
The table above is derived from the one approved by the National Fire Protection Agency and used in the National Electrical Code, NFPA-70. The complete table can be found in sections 725.144 and 800 Communication Circuits of the code. The table identifies the ampacity of each conductor (in amperes) in a 4-pair Class 2 or Class 3 data cable. Ambient temperature used for development of the table is 30°C (86° F) with all conductors in all cables carrying current. The table is based on 60°C (140°F), 75°C (167°F) and 90°C (194°F) rated cables. All cable temps are operational temp ratings. Cables with temp ratings above 90c would deliver additional power handling capacity.														



Copper

Transmission Specifications

ANSI/TIA-568.2-D Category 6A Verified

ISO/IEC 11801, 2nd ed. Class EA Compliant

	Ins. Loss	NEXT	PSNEXT	ACR	PSACR	ACRF	PSACRF	Return Loss	PSANEXT	PSANEXT	PSAACRF	PSAACRF
Freq. (MHz)	Max.	Min.	Min.	Min.	Min.	Min.	Min.	Min.	TIA Std.	Min	TIA Std.	Min
1	2.1	74.3	72.3	72.2	70.2	67.8	64.8	20.0	67.0	73.0	67.0	73.0
4	3.8	65.3	63.3	61.5	59.5	55.8	52.8	23.0	67.0	73.0	66.2	72.2
8	5.3	60.8	58.8	55.4	53.4	49.7	46.7	24.5	67.0	73.0	60.1	66.1
10	5.9	59.3	57.3	53.4	51.4	47.8	44.8	25.0	67.0	73.0	58.2	64.2
16	7.5	56.2	54.2	48.8	46.8	43.7	40.7	25.0	67.0	73.0	54.1	60.1
20	8.4	54.8	52.8	46.4	44.4	41.8	38.8	25.0	67.0	73.0	52.2	58.2
25	9.4	53.3	51.3	44.0	42.0	39.8	36.8	24.3	67.0	73.0	50.2	56.2
31.25	10.5	51.9	49.9	41.4	39.4	37.9	34.9	23.6	67.0	73.0	48.3	54.3
62.5	15.0	47.4	45.4	32.4	30.4	31.9	28.9	21.5	65.6	71.6	42.3	48.3
100	19.1	44.3	42.3	25.2	23.2	27.8	24.8	20.1	62.5	68.5	38.2	44.2
155	24.1	41.4	39.4	17.4	15.4	24.0	21.0	18.8	59.6	65.6	34.4	40.4
200	27.6	39.8	37.8	12.2	10.2	21.8	18.8	18.0	58.0	64.0	32.2	38.2
250	31.1	39.3	36.3	7.3	5.3	19.8	16.8	17.3	56.5	62.5	30.2	36.2
300	34.3	37.1	35.1	2.9	0.9	18.3	15.3	16.8	55.3	61.3	28.7	34.7
350	37.2	36.1	34.1	-	-	16.9	13.9	16.3	54.3	60.3	27.3	33.3
400	40.1	35.3	33.3	-	-	15.8	12.8	15.9	53.5	59.3	26.2	32.2
500	45.3	33.8	31.8	-	-	13.8	10.8	15.2	52.0	58.0	24.2	30.2
555*	47.9	33.1	31.1	-	-	12.9	9.9	14.9	51.3	57.3	23.3	29.3
660*	52.8	32.0	30.0	-	-	11.4	8.4	14.4	50.2	56.2	21.8	27.8

*Frequencies beyond the TIA and ISO requirements are for information only.

All values are dB/100m.

Cat 6A Supra 10G-XE™

Copper

HITACHI Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant
- Made in USA.
- UL Verified TIA-568-C.2.
- Low Smoke Plenum construction.
- Tested from 1 to 660 MHz.
- Small O.D. allows more cables per conduit.
- Noise Control Barrier (NCB™) technology allows for a reduced outside diameter and electrical performance that is superior to discontinuous shield designs.
- UL Tested (LP) for maximum power support.

TIA PARAMETER	GUARANTEED HEADROOM
PSANEXT loss	+6 dB
PSACRF	+6 dB

Packaging

- 1,000 foot (305m) reels, RIB (Reel-in-a-box)
- Reverse sequential footage markings standard on a 1,000 packages.

Applications

- Including:
 - HDBase-T A & B
 - 10 Gigabit Ethernet (IEEE 802.3an)
 - 5 Gigabit Ethernet (IEEE 802.3bz)
 - 2.5 Gigabit Ethernet (IEEE 802.3bz)
 - Gigabit Ethernet (IEEE 802.3ab)
 - 100 Mbps Ethernet (IEEE 802.3u)
 - 1000 Mbps ATM
 - 622 Mbps ATM
 - 15W PoE (IEEE 802.3af)
 - 30W PoE+ (IEEE 802.3at)
 - 60W PoE++ (IEEE 802.3bt Type 3)
 - 100W PoE++ (IEEE 802.3bt Type 4)

Temp Range

- Storage Temperature
 - 40°C to +60°C (-40°F to +140°F)
- Installation Temperature
 - 0°C to +60°C (+32°F to +140°F)
- Operation Temperature
 - Plenum**
 - 20°C to +90°C (-4°F to +194°F)
 - Riser/Low Smoke Halogen Free**
 - 20°C to +75°C (-4°F to +167°F)

Supra 10G-XE (Plenum)

c(UL)us Listed Type CMP (UL 910), CSA Type FT6

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30303-8-XXY	4	.270	6.858	40.34	18.29

Supra 10G-XE (Riser)

c(UL)us Listed Type CMR (UL 1666), CSA Type FT4

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30304-8-XXY	4	.275	6.985	39.02	17.70

Supra 10G-XE (Riser-Low Smoke Zero Halogen Jacket)

c(UL)us Listed Type CMR (UL1666), CSA Type FT4


HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30295-8-XXY	4	.28	7.11	39.02	17.70

Building a Part Number

Base Part Number Ex.	No. of Conductors	Jacket Color	Reel Type
30303	8	XX	Y

Jacket Colors (XX): Black(BK); Blue(BL); Brown(BR); Gray(GA); Green(GR); Red(RD); White(WH); Yellow(YE)
Reel Type (Y): Reels(3), RIB(4)

Features

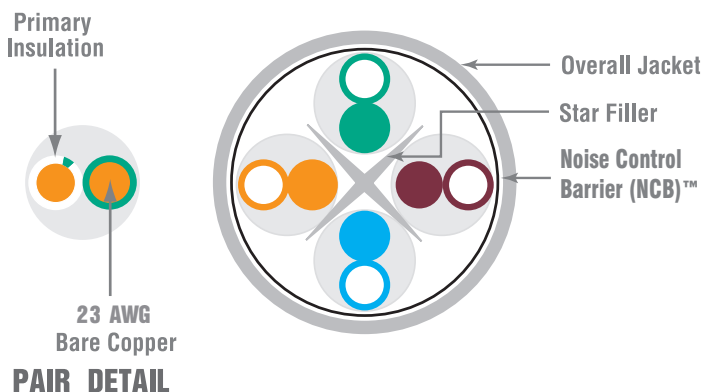

DIELECTRIC MATERIALS	RISER	PLENUM
Primary Insulation	Polyolefin	Plenum-rated fluoropolymer
Overall Jacket	Flame-retardant thermoplastic	Low-smoke, flame-retardant thermoplastic
Star Filler	Flame-retardant thermoplastic	Plenum-rated polymer

Hitachi Cable America reserves the right to revise any specifications.

Electrical Characteristics

Input impedance	100 ± 15Ω (1.0 to 100 MHz) 100 ± 20Ω (100 to 250 MHz) 100 ± 25Ω (251 to 500 MHz)
Maximum resistance unbalance	3%
Maximum capacitance unbalance	330 pF/100 meters
Maximum delay skew	45 ns/100 meters
Nominal velocity of propagation (NVP)	68%, riser 70%, plenum
Voltage Rating	300 Volts
LP Rating (UL) - CMP	.6 Amps/conductor

Cable Ampacity Chart

Bundle Size	1		2-7		8-19		20-37		38-61		62-91		92-192	
Cable Temp	75°C	90°C	75°C	90°C	75°C	90°C	75°C	90°C	75°C	90°C	75°C	90°C	75°C	90°C
23 AWG	2.5	2.5	1.5	1.7	1.1	1.7	0.8	0.9	0.7	0.8	0.7	0.8	0.5	0.6

The table above is derived from the one approved by the National Fire Protection Agency and used in the National Electrical Code, NFPA-70. The complete table can be found in sections 725.144 and 800 Communication Circuits of the code. The table identifies the ampacity of each conductor (in amperes) in a 4-pair Class 2 or Class 3 data cable. Ambient temperature used for development of the table is 30°C (86°F) with all conductors in all cables carrying current. The table is based on 60°C (140°F), 75°C (167°F) and 90°C (194°F) rated cables. All cable temps are operational temp ratings. Cables with temp ratings above 90c would deliver additional power handling capacity.



Transmission Specifications

ANSI/TIA-568.2-D Category 6A Verified

ISO/IEC 11801, 2nd ed. Class EA Compliant

	Ins. Loss	NEXT	PSNEXT	ACR	PSACR	ACRF	PSACRF	Return Loss	PSANEXT	PSANEXT	PSAACRF	PSAACRF
Freq. (MHz)	Max.	Min.	Min.	Min.	Min.	Min.	Min.	Min.	TIA Std.	Min	TIA Std.	Min
1	2.1	74.3	72.3	72.2	70.2	67.8	64.8	20.0	67.0	73.0	67.0	73.0
4	3.8	65.3	63.3	61.5	59.5	55.8	52.8	23.0	67.0	73.0	66.2	72.2
8	5.3	60.8	58.8	55.4	53.4	49.7	46.7	24.5	67.0	73.0	60.1	66.1
10	5.9	59.3	57.3	53.4	51.4	47.8	44.8	25.0	67.0	73.0	58.2	64.2
16	7.5	56.2	54.2	48.8	46.8	43.7	40.7	25.0	67.0	73.0	54.1	60.1
20	8.4	54.8	52.8	46.4	44.4	41.8	38.8	25.0	67.0	73.0	52.2	58.2
25	9.4	53.3	51.3	44.0	42.0	39.8	36.8	2.3	67.0	73.0	50.2	56.2
31.25	10.5	51.9	49.9	41.4	39.4	37.9	34.9	23.6	67.0	73.0	48.3	54.3
62.5	15.0	47.4	45.4	32.4	30.4	31.9	28.9	21.5	65.6	71.6	42.3	48.3
100	19.1	44.3	42.3	25.2	23.2	27.8	24.8	20.1	62.5	68.5	38.2	44.2
155	24.1	41.4	39.4	17.4	15.4	24.0	21.0	18.8	59.6	65.6	34.4	40.4
200	27.6	39.8	37.8	12.2	10.2	21.8	18.8	18.0	58.0	64.0	32.2	38.2
250	31.1	38.3	36.3	7.3	5.3	19.8	16.8	17.3	56.5	62.5	30.2	36.2
300	34.3	37.1	35.1	2.9	0.9	18.3	15.3	16.8	55.3	61.3	28.7	34.7
350	37.2	36.1	34.1	-	-	16.9	13.9	16.3	54.3	60.3	27.3	33.3
400	40.1	35.3	33.3	-	-	15.8	12.8	15.9	53.5	59.3	26.2	32.2
500	45.3	33.8	31.8	-	-	13.8	10.8	15.2	52.0	58.0	24.2	30.2
555*	47.9	33.1	31.1	-	-	12.9	9.9	14.9	51.3	57.3	23.3	29.3
660*	52.8	32.0	30.0	-	-	11.4	8.4	14.4	50.2	56.2	21.8	27.8

*Frequencies beyond the TIA and ISO requirements are for information only.
All values are dB/100m.

Cat 6A Supra 10G™

HITACHI Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- UL Verified.
- Low Smoke Plenum construction.
- Unique spline construction is installation and termination friendly.
- Guaranteed minimum performance.
- Tested from 1 to 660 MHz.
- Performance that exceeds TIA and ISO Category 6A requirements.
- Patented non-concentric design increases alien crosstalk performance.

Packaging

- 1,000 foot (305m) reels
- Reverse sequential footage markings standard on a 1,000 packages.

Options

- CMP-50 rated cables available
- Low smoke zero halogen available; Part #30224-8

Applications

- Including:
 - HDBase-T A & B
 - 10 Gigabit Ethernet (IEEE 802.3an)
 - 5 Gigabit Ethernet (IEEE 802.3bz)
 - 2.5 Gigabit Ethernet (IEEE 802.3bz)
 - Gigabit Ethernet (IEEE 802.3ab)
 - 100 Mbps Ethernet (IEEE 802.3u)
 - 1000 Mbps ATM
 - 622 Mbps ATM
 - 15W PoE (IEEE 802.3af)
 - 30W PoE+ (IEEE 802.3at)
 - 60W PoE++ (IEEE 802.3bt Type 3)
 - 100W PoE++ (IEEE 802.3bt Type 4)

Temp Range

- Storage Temperature
 - 40°C to +60°C (-40°F to +140°F)
- Installation Temperature
 - 0°C to +60°C (+32°F to +140°F)
- Operation Temperature
 - 20°C to +75°C (-4°F to +167°F)

Supra 10G™ UTP (Plenum)

c(UL)us Listed Type CMP (UL 910), CSA Type FT6

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30218-8-XXY	4	.31	7.87	47.25	21.43

Supra 10G™ UTP (Riser)

c(UL)us Listed Type CMR (UL 1666), CSA Type FT4

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30222-8-XXY	4	.32	8.13	36.72	16.65

Building a Part Number

Base Part Number Ex.	No. of Conductors	Jacket Color	Reel Type
30218	8	XX	Y


Jacket Colors (XX):

Black(BK); Blue(BL); Brown(BR); Gray(GA); Green(GR); Red(RD); White(WH); Yellow(YE)

Reel Type (Y):

Reels(3)

Features

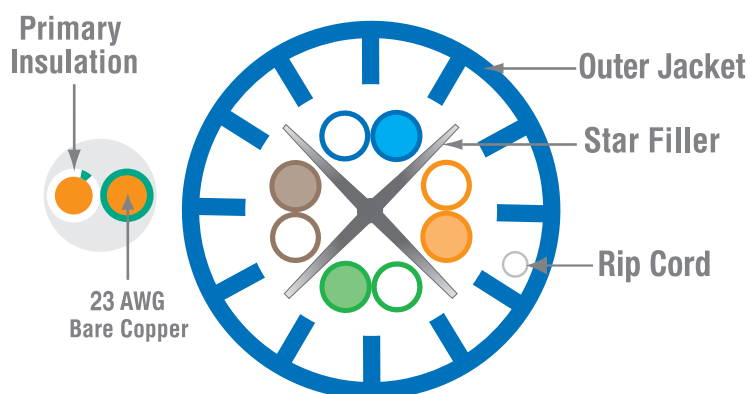

PAIR DETAIL

DIELECTRIC MATERIALS	RISER	PLENUM
Primary Insulation	Polyolefin	Plenum-rated fluoropolymer
Overall Jacket	Flame-retardant thermoplastic	Low-smoke, flame-retardant thermoplastic
Star Filler	Flame-retardant thermoplastic	Plenum-rated polymer


Hitachi Cable America reserves the right to revise any specifications.

UTP Category 6A

Electrical Characteristics

Input Impedance	100 ± 15Ω (1.0 to 100 MHz) 100 ± 20Ω (100 to 250 MHz) 100 ± 25Ω (251 to 500 MHz)
Maximum conductor resistance	9.38 Ω/100 meters @ 20C
Maximum resistance unbalance	3%
Maximum capacitance unbalance	330 pF/100 meters
Maximum delay skew	45 ns/100 meters
Nominal velocity of propagation (NVP)	riser, 68% plenum, 71%
Voltage Rating	300 Volts

Unique patented non-concentric design produces alien crosstalk performance that far exceeds the TIA standard.



Copper

Cable Ampacity Chart

Bundle Size	1	2-7	8-19	20-37	38-61	62-91	92-192
Cable Temp	75°C	75°C	75°C	75°C	75°C	75°C	75°C
23 AWG	2.5	1.5	1.1	0.8	0.7	0.7	0.5

The table above is derived from the one approved by the National Fire Protection Agency and used in the National Electrical Code, NFPA-70. The complete table can be found in sections 725.144 and 800 Communication Circuits of the code. The table identifies the ampacity of each conductor (in amperes) in a 4-pair Class 2 or Class 3 data cable. Ambient temperature used for development of the table is 30°C (86°F) with all conductors in all cables carrying current. The table is based on 60°C (140°F), 75°C (167°F) and 90°C (194°F) rated cables. All cable temps are operational temp ratings. Cables with temp ratings above 90c would deliver additional power handling capacity.

Photo is for representation purposes only.

Transmission Specifications

ANSI/TIA-568.2-D Category 6A Verified

ISO/IEC 11801, 2nd ed. Class Ea Compliant

	Ins. Loss	NEXT	PSNEXT	ACR	PSACR	ACRF	PSACRF	Return Loss	PSANEXT	PSAACRF
Freq. (MHz)	Max.	Min.	Min.	Min.	Min.	Min.	Min.	Min.	Min.	Min.
1	2.1	74.3	72.3	72.2	70.2	67.8	64.8	20.0	67.0	67.0
4	3.8	65.3	63.3	61.5	59.5	55.8	52.8	23.0	67.0	66.2
8	5.3	60.8	58.8	55.4	53.4	49.7	46.7	24.5	67.0	60.1
10	5.9	59.3	57.3	53.4	51.4	47.8	44.8	25.0	67.0	58.2
16	7.5	56.2	54.2	48.8	46.8	43.7	40.7	25.0	67.0	54.1
20	8.4	54.8	52.8	46.4	44.4	41.8	38.8	25.0	67.0	52.2
25	9.4	53.3	51.3	44.0	42.0	39.8	36.8	2.3	67.0	50.2
31.25	10.5	51.9	49.9	41.4	39.4	37.9	34.9	23.6	67.0	48.3
62.5	15.0	47.4	45.4	32.4	30.4	31.9	28.9	21.5	65.6	42.3
100	19.1	44.3	42.3	25.2	23.2	27.8	24.8	20.1	62.5	38.2
155	24.1	41.4	39.4	17.4	15.4	24.0	21.0	18.8	59.6	34.4
200	27.6	39.8	37.8	12.2	10.2	21.8	18.8	18.0	58.0	32.2
250	31.1	38.3	36.3	7.3	5.3	19.8	16.8	17.3	56.5	30.2
300	34.3	37.1	35.1	2.9	0.9	18.3	15.3	16.8	55.3	28.7
350	37.2	36.1	34.1	-	-	16.9	13.9	16.3	54.3	27.3
400	40.1	35.3	33.3	-	-	15.8	12.8	15.9	53.5	26.2
500	45.3	33.8	31.8	-	-	13.8	10.8	15.2	52.0	24.2
555*	47.9	33.1	31.1	-	-	12.9	9.9	14.9	51.3	23.3
660*	52.8	32.0	30.0	-	-	11.4	8.4	14.4	50.2	21.8

*Frequencies beyond the TIA and ISO requirements are for information only. All values are dB/100m.

Cat 6A DryBit™

Copper

HITACHI Inspire the Next

Product Highlights

- REACH & RoHS compliant.
- Made in USA.
- Guaranteed minimum performance.
- Tested from 1 to 660 MHz.
- UL Verified TIA-568-D.2 Category 6A.
- UL Verified (UL B627696) for long term water submersion.
- UL Listed for use in plenum areas.
- UV resistant jacket.
- Specifically designed for below-grade conduit or other environments where water is likely to infiltrate.
- Ideal for industrial & harsh environments.
- Resistant to over 2,000 chemicals.
- No-gel construction simplifies termination.
- Drybit Barrier ensures optimum electrical performance even in harsh environments.
- Available in both UTP and FUTP.
- Standard jacket color is black. Custom colors available.

Packaging

- 1,000 foot (305m) reels.

Applications

- Including:
 - 10 Gigabit Ethernet (IEEE 802.3an)
 - 5 Gigabit Ethernet (IEEE 802.3bz)
 - 2.5 Gigabit Ethernet (IEEE 802.3bz)
 - Gigabit Ethernet (IEEE 802.3ab)
 - 100 Mbps Ethernet (IEEE 802.3u)
 - 1000 Mbps ATM
 - 622 Mbps ATM
 - 15W PoE (IEEE 802.3af)
 - 30W PoE+ (IEEE 802.3at)
 - 60W PoE++ (IEEE 802.3bt Type 3)
 - 100W PoE++ (IEEE 802.3bt Type 4)

Temp Range

- Storage Temperature
 - 40°C to +70°C (-40°F to +158°F)
- Installation Temperature
 - 0°C to +60°C (+32°F to +140°F)
- Operation Temperature
 - 40°C to +90°C (-40°F to +194°F)

DryBit™ Indoor-Outdoor CMP UTP (Plenum)


c(UL)us Listed Type CMP (UL 910), CSA Type FT6

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30323-8-BK3	4	.31	7.87	54.7	24.8


DryBit™ Indoor-Outdoor CMP FUTP (Plenum)

c(UL)us Listed Type CMP (UL 910), CSA Type FT6

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30322-8-BK3	4	.31	7.87	56.0	25.4

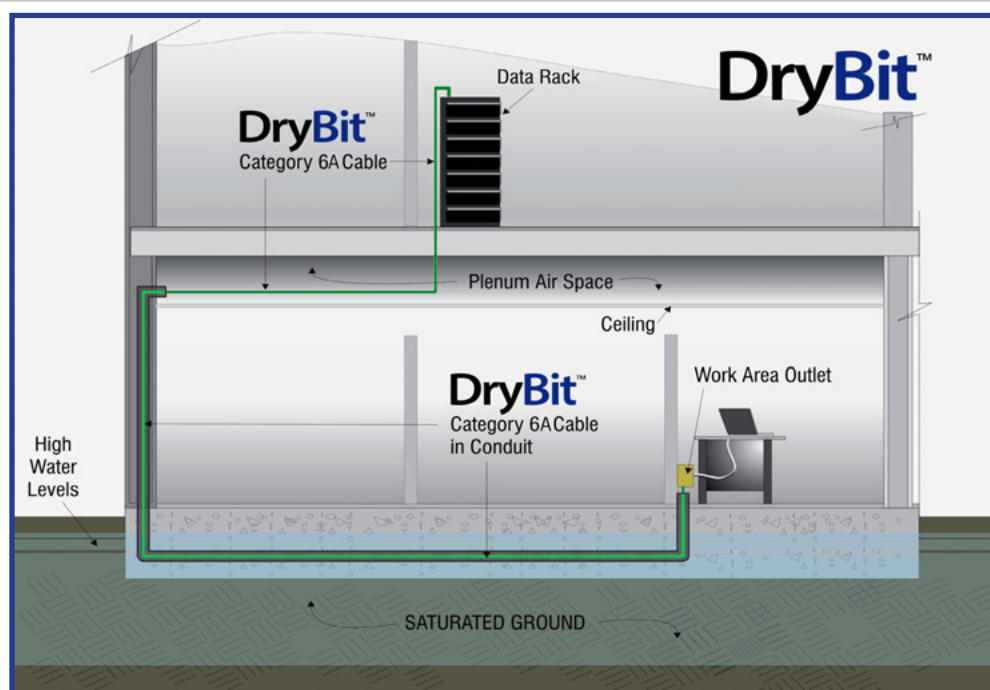

Features

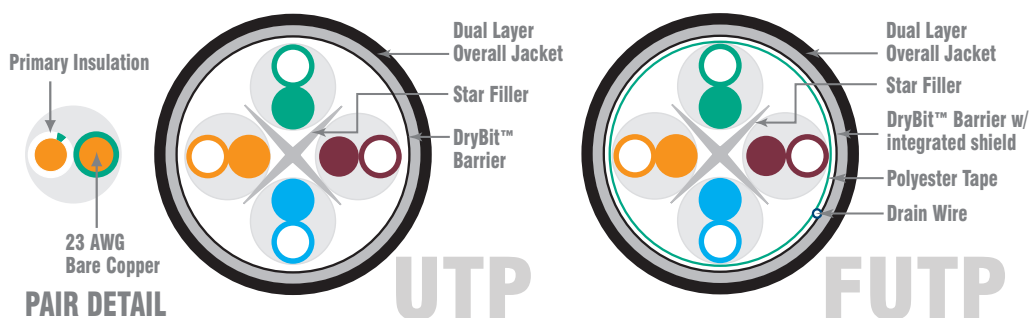

DIELECTRIC MATERIALS
Primary Insulation
Overall Jacket

PLENUM
Plenum-rated fluoropolymer
Low-smoke, flame-retardant thermoplastic

Installation Notes: To ensure safe operation, install cables according to all applicable local and national electrical codes.

"During installation, take precautions to ensure any water present in pathway does not enter the open end of the cable. Water infiltration via the open ends of the cable will negatively impact cable performance and void any applicable product warranty."

Category 6A

UTP & FUTP

Electrical Characteristics

Input Impedance	100 ± 15Ω (1.0 to 250 MHz)
Maximum conductor resistance	9.38 Ω/100 meters @ 20C
Maximum resistance unbalance	5%
Maximum capacitance unbalance	330 pF/100 meters
Maximum delay skew	45 ns/100 meters
Nominal velocity of propagation (NVP)	plenum, 70%
Voltage Rating	300 Volts

Cable Ampacity Chart

Bundle Size	1	2-7	8-19	20-37	38-61	62-91	92-192
Cable Temp	90°C	90°C	90°C	90°C	90°C	90°C	90°C
23 AWG	2.5	1.7	1.2	0.9	0.8	0.8	0.6

The table above is derived from the one approved by the National Fire Protection Agency and used in the National Electrical Code, NFPA-70. The complete table can be found in sections 725.144 and 800 Communication Circuits of the code. The table identifies the ampacity of each conductor (in amperes) in a 4-pair Class 2 or Class 3 data cable. Ambient temperature used for development of the table is 30°C (86°F) with all conductors in all cables carrying current. The table is based on 60°C (140°F), 75°C (167°F) and 90°C (194°F) rated cables. All cable temps are operational temp ratings. Cables with temp ratings above 90c would deliver additional power handling capacity.

UTP

FUTP



Photos are for representation purposes only.

Copper

Transmission Specifications

ANSI/TIA-568.2-D Category 6A Verified

ISO/IEC 11801, 2nd ed. Class EA Compliant

	Ins. Loss	NEXT	PSNEXT	ACR	PSACR	ACRF	PSACRF	Return Loss	PSANEXT	PSANEXT	PSAACRF	PSAACRF
Freq. (MHz)	Max.	Min.	Min.	Min.	Min.	Min.	Min.	Min.	TIA Std.	Min	TIA Std.	Min
1	2.1	74.3	72.3	72.2	70.2	67.8	64.8	20.0	67.0	73.0	67.0	73.0
4	3.8	65.3	63.3	61.5	59.5	55.8	52.8	23.0	67.0	73.0	66.2	72.2
8	5.3	60.8	58.8	55.4	53.4	49.7	46.7	24.5	67.0	73.0	60.1	66.1
10	5.9	59.3	57.3	53.4	51.4	47.8	44.8	25.0	67.0	73.0	58.2	64.2
16	7.5	56.2	54.2	48.8	46.8	43.7	40.7	25.0	67.0	73.0	54.1	60.1
20	8.4	54.8	52.8	46.4	44.4	41.8	38.8	25.0	67.0	73.0	52.2	58.2
25	9.4	53.3	51.3	44.0	42.0	39.8	36.8	2.3	67.0	73.0	50.2	56.2
31.25	10.5	51.9	49.9	41.4	39.4	37.9	34.9	23.6	67.0	73.0	48.3	54.3
62.5	15.0	47.4	45.4	32.4	30.4	31.9	28.9	21.5	65.6	71.6	42.3	48.3
100	19.1	44.3	42.3	25.2	23.2	27.8	24.8	20.1	62.5	68.5	38.2	44.2
155	24.1	41.4	39.4	17.4	15.4	24.0	21.0	18.8	59.6	65.6	34.4	40.4
200	27.6	39.8	37.8	12.2	10.2	21.8	18.8	18.0	58.0	64.0	32.2	38.2
250	31.1	38.3	36.3	7.3	5.3	19.8	16.8	17.3	56.5	62.5	30.2	36.2
300	34.3	37.1	35.1	2.9	0.9	18.3	15.3	16.8	55.3	61.3	28.7	34.7
350	37.2	36.1	34.1	-	-	16.9	13.9	16.3	54.3	60.3	27.3	33.3
400	40.1	35.3	33.3	-	-	15.8	12.8	15.9	53.5	59.3	26.2	32.2
500	45.3	33.8	31.8	-	-	13.8	10.8	15.2	52.0	58.0	24.2	30.2
555*	47.9	33.1	31.1	-	-	12.9	9.9	14.9	51.3	57.3	23.3	29.3
660*	52.8	32.0	30.0	-	-	11.4	8.4	14.4	50.2	56.2	21.8	27.8

*Frequencies beyond the TIA and ISO requirements are for information only. All values are dB/100m.

Hitachi Cable America reserves the right to revise any specifications.

Cat 6A Outdoor

HITACHI Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant
- Made in USA.
- Suitable for direct burial, lashed aerial, duct and underground conduit applications.
- Cable core is filled with non-conductive, water-blocking gel.
- Rugged black polyolefin jacket.
- UV resistant jacket.
- Proven shield technology improves RFI and EMI performance.

Packaging

- 1,000 foot (305m) reels

Applications

- Including:
 - 10 Gigabit Ethernet (IEEE 802.3an)
 - 5 Gigabit Ethernet (IEEE 802.3bz)
 - 2.5 Gigabit Ethernet (IEEE 802.3bz)
 - Gigabit Ethernet (IEEE 802.3ab)
 - 100 Mbps Ethernet (IEEE 802.3u)
 - 1000 Mbps ATM
 - 622 Mbps ATM
 - 15W PoE (IEEE 802.3af)
 - 30W PoE+ (IEEE 802.3at)
 - 60W PoE++ (IEEE 802.3bt Type 3)
 - 100W PoE++ (IEEE 802.3bt Type 4)

Temp Range

- Storage Temperature
 - 40°C to +70°C (-40°F to +158°F)
- Installation Temperature
 - 20°C to +70°C (-4°F to +158°F)
- Operation Temperature
 - 40°C to +70°C (-40°F to +158°F)

Category 6A F/UTP Outdoor

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	CABLE mm	WEIGHT lbs/1000ft	kg/305m
Category 6					
30287-8-XXY	4	0.360	9.144	56.87	25.8

Building a Part Number

Base Part Number Ex.	No. of Conductors	Jacket Color	Reel Type
30287	8	XX	Y


Jacket Colors (XX):

Black(BK)

Reel Type (Y):

Reels(3)

Features

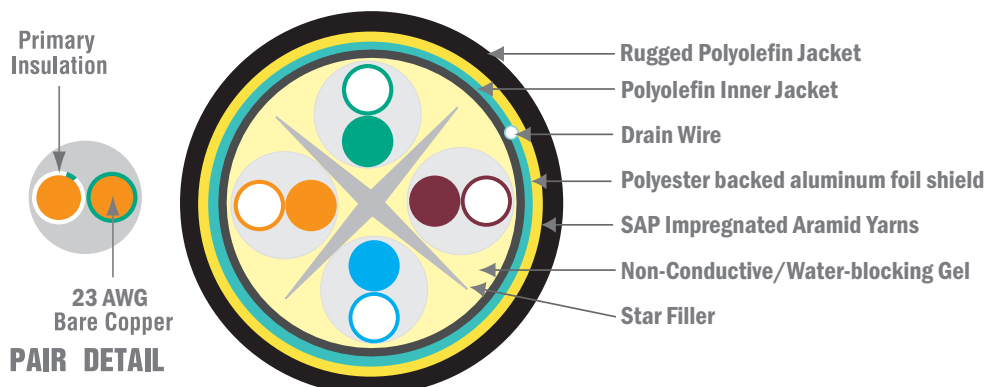

DIELECTRIC MATERIALS

Primary Insulation

Overall Jacket

OUTDOOR F/UTP CABLES

Polyolefin and/or Fluoropolymer

Medium density polyolefin

Hitachi Cable America reserves the right to revise any specifications.

Outdoor Cable

Special Applications

Electrical Characteristics

Input impedance	100+/-15 Ω (1.0-100 MHz)
	100+/-20 Ω (101-250 MHz)
	100+/-25 Ω (251-500 MHz)
Maximum Conductor Resistance:	9.38 Ω /100 Meters @ 20C
Maximum Resistance Unbalance:	3%
Maximum Mutual Capacitance:	5.6 nF/100 Meters @ 1 kHz
Maximum Capacitance Unbalance:	330 pF/100 Meters
Maximum Delay Skew:	45 ns/100 Meters
Nominal Velocity of Propagation:	67%

Cable Ampacity Chart							
Bundle Size	1	2-7	8-19	20-37	38-61	62-91	92-192
Cable Temp	60°C	60°C	60°C	60°C	60°C	60°C	60°C
23 AWG	2.5	1.2	0.8	0.6	0.5	0.5	0.4

The table above is derived from the one approved by the National Fire Protection Agency and used in the National Electrical Code, NFPA-70. The complete table can be found in sections 725.144 and 800 Communication Circuits of the code. The table identifies the ampacity of each conductor (in amperes) in a 4-pair Class 2 or Class 3 data cable. Ambient temperature used for development of the table is 30°C (86°F) with all conductors in all cables carrying current. The table is based on 60°C (140°F), 75°C (167°F) and 90°C (194°F) rated cables. All cable temps are operational temp ratings. Cables with temp ratings above 90c would deliver additional power handling capacity.

Transmission Specifications

ANSI/TIA-568.2-D Category 6A Compliant

ISO/IEC 11801, 2nd ed. Class EA Compliant

Frequency (MHz)	Insertion Loss Max. (dB / 100 m)	NEXT Loss Min. (dB / 100 m)		ACR Min. (dB / 100 m)		ACRF Min. (dB / 100 m)		Return Loss Min. (dB / 100 m)	Delay Max. (ns / 100 m)
		WP	PS	WP	PS	WP	PS		
1	2.1	74.3	72.3	72.2	70.2	67.8	64.8	20.0	599
4	3.8	65.3	63.3	61.5	59.5	55.8	52.8	23.0	580
8	5.3	60.8	58.8	55.4	53.4	49.7	46.7	24.5	574
10	5.9	59.3	57.3	53.4	51.4	47.8	44.8	25.0	573
16	7.5	56.2	54.2	48.8	46.8	43.7	40.7	25.0	570
20	8.4	54.8	52.8	46.4	44.4	41.8	38.8	25.0	569
25	9.4	53.3	51.3	44.0	42.0	39.8	36.8	24.3	568
31.25	10.5	51.9	49.9	41.4	39.4	37.9	34.9	23.6	567
62.5	15.0	47.4	45.4	32.4	30.4	31.9	28.9	21.5	565
100	19.1	44.3	42.3	25.2	23.2	27.8	24.8	20.1	564
155	24.1	41.4	39.4	17.4	15.4	24.0	21.0	18.8	564
200	27.6	39.8	37.8	12.2	10.2	21.8	18.8	18.0	563
250	31.1	38.3	36.3	7.3	5.3	19.8	16.8	17.3	563
300	34.3	37.1	35.1	2.9	0.9	18.3	15.3	16.8	563
350	37.2	36.1	34.1	---	---	16.9	13.9	16.3	563
400	40.1	35.3	33.3	---	---	15.8	12.8	15.9	563
500	45.3	33.8	31.8	---	---	13.8	10.8	15.2	562
555*	47.9	33.1	31.1	---	---	12.9	9.9	14.9	562
660*	52.8	32.0	30.0	---	---	11.4	8.4	14.4	562

*Frequencies beyond the TIA and ISO requirements are for information only.
All values are dB/100m.



Copper

Cat 6 F/UTP

HITACHI Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- UL Verified.
- Low Smoke Plenum construction.
- Tested from 1 to 555 MHz.
- Proven shield technology improves RFI and EMI performance.

Packaging

- 1,000 foot (305m) reels
- Reverse sequential footage markings standard on a 1,000 packages.

Applications

- Including:
HDBase-T A & B
5 Gigabit Ethernet (IEEE 802.3bz)
2.5 Gigabit Ethernet (IEEE 802.3bz)
Gigabit Ethernet (IEEE 802.3ab)
100 Mbps Ethernet (IEEE 802.3u)
1000 Mbps ATM
622 Mbps ATM
15W PoE (IEEE 802.3af)
30W PoE+ (IEEE 802.3at)
60W PoE++ (IEEE 802.3bt Type 3)
100W PoE++ (IEEE 802.3bt Type 4)

Temp Range

- Storage Temperature
-40°C to +60°C (-40°F to +140°F)
- Installation Temperature
0°C to +60°C (+32°F to +140°F)
- Operation Temperature
-20°C to +75°C (-4°F to +167°F)

Category 6 F/UTP (Plenum)

c(UL)us Listed Type CMP (UL 910), CSA Type FT6

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30154-8-XXY	4	.275	6.98	40.33	18.29

Category 6 F/UTP (Riser)

c(UL)us Listed Type CMR (UL 1666), CSA Type FT4

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30129-8-XXY	4	.29	7.37	39.02	17.70

Building a Part Number

Base Part Number Ex.	No. of Conductors	Jacket Color	Reel Type
30154	8	XX	Y


Jacket Colors (XX):

Black(BK); Blue(BL); Brown(BR); Gray(GA); Green(GR); Red(RD); White(WH); Yellow(YE)

Reel Type (Y):

Reels(3)

Features

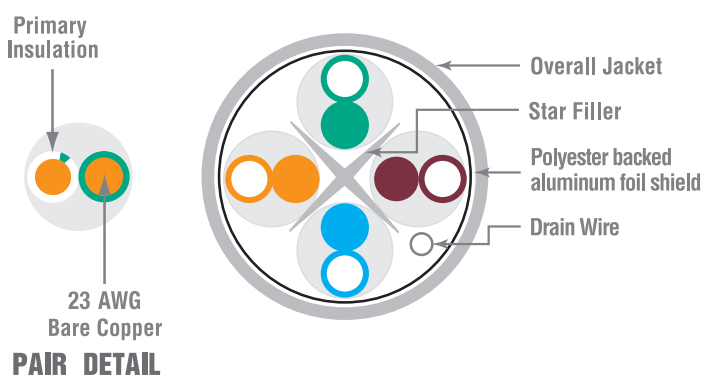

DIELECTRIC MATERIALS

Primary Insulation
Overall Jacket
Star Filler

RISER

Flame-retardant thermoplastic
Flame-retardant thermoplastic
Flame-retardant thermoplastic

PLENUM

Plenum-rated fluoropolymer
Low-smoke, flame-retardant thermoplastic
Plenum-rated polymer

Hitachi Cable America reserves the right to revise any specifications.

F/UTP Category 6

Electrical Characteristics

Input impedance	100 ± 15Ω (1.0 to 100 MHz) 100 ± 20Ω (101 to 250 MHz)
Maximum resistance unbalance	5%
Maximum capacitance unbalance	330 pF/100 meters
Maximum delay skew	45 ns/100 meters
Nominal velocity of propagation (NVP)	68%, riser 70%, plenum
Voltage Rating	300 Volts

Cable Ampacity Chart							
Bundle Size	1	2-7	8-19	20-37	38-61	62-91	92-192
Cable Temp	75°C	75°C	75°C	75°C	75°C	75°C	75°C
23 AWG	2.5	1.5	1.1	0.8	0.7	0.7	0.5

The table above is derived from the one approved by the National Fire Protection Agency and used in the National Electrical Code, NFPA-70. The complete table can be found in sections 725.144 and 800 Communication Circuits of the code. The table identifies the ampacity of each conductor (in amperes) in a 4-pair Class 2 or Class 3 data cable. Ambient temperature used for development of the table is 30°C (86°F) with all conductors in all cables carrying current. The table is based on 60°C (140°F), 75°C (167°F) and 90°C (194°F) rated cables. All cable temps are operational temp ratings. Cables with temp ratings above 90c would deliver additional power handling capacity.



Photo is for representation purposes only.

Copper

Transmission Specifications

ANSI/TIA-568.2-D Category 6 Verified

ISO/IEC 11801, 2nd ed. Class E Compliant

Freq. (MHz)	Ins. Loss		NEXT		PSNEXT		ACR		PSACR		ACRF		PSACRF		Return Loss	
	Std.	Max.	Std.	Min.	Std.	Min.	Cal.	Min.	Cal.	Min.	Std.	Min.	Std.	Min.	Std.	Min.
1	2.0	2.0	74.3	74.3	72.3	72.3	72.3	72.3	70.3	70.3	67.8	67.8	64.8	64.8	20.0	20.0
4	3.8	3.8	65.3	65.3	63.3	63.3	61.5	61.5	59.5	59.5	55.8	55.8	52.8	52.8	23.0	23.0
8	5.3	5.3	60.8	60.8	58.8	58.8	55.4	55.4	53.4	53.4	49.7	49.7	46.7	46.7	24.5	24.5
10	6.0	6.0	59.3	59.3	57.3	57.3	53.3	53.3	51.3	51.3	47.8	47.8	44.8	44.8	25.0	25.0
16	7.6	7.6	56.2	56.2	54.2	54.2	48.7	48.7	46.7	46.7	43.7	43.7	40.7	40.7	25.0	25.0
31.25	10.7	10.7	51.9	51.9	49.9	49.9	41.2	41.2	39.2	39.2	37.9	37.9	34.9	34.9	23.6	23.6
62.5	15.4	15.4	47.4	47.4	45.4	45.4	32.0	32.0	30.0	30.0	31.9	21.9	28.9	28.9	21.5	21.5
100	19.8	19.8	44.3	44.3	42.3	42.3	24.5	24.5	22.5	22.5	27.8	27.8	24.8	24.8	20.1	20.1
200	29.0	29.0	39.8	39.8	37.8	37.8	10.8	10.8	8.8	8.8	21.8	21.8	18.8	18.8	18.0	18.0
250	32.8	32.8	38.3	38.3	36.3	36.3	5.5	5.5	3.5	3.5	19.8	19.8	16.8	16.8	17.3	17.3
350*	-	39.8	-	36.1	-	34.1	-	-	-	-	-	16.9	-	13.9	-	16.3
555*	-	52.0	-	33.1	-	31.1	-	-	-	-	-	12.9	-	9.9	-	14.9
660*	-	57.7	-	32.0	-	30.0	-	-	-	-	-	11.4	-	8.4	-	14.4

*Frequencies beyond the TIA and ISO requirements are for information only.
All values are dB/100m.

Cat 6 Supra™ 660

HITACHI Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- UL Verified.
- Low Smoke Plenum construction.
- Guaranteed minimum performance.
- Enhanced performance beyond TIA Standard.
- Tested from 1 to 660 MHz.

TIA PARAMETER	GUARANTEED HEADROOM
Insertion loss	+3%
NEXT loss	+9 dB
PSNEXT loss	+9 dB
ACRF	+8 dB
PSACRF	+8 dB

Packaging

- 1,000 foot (305m) reels, Reelex
- Reverse sequential footage markings standard on a 1,000 packages.

Options

- CMP-50 rated cables available

Applications

- Including:

HDBase-T A & B
 5 Gigabit Ethernet (IEEE 802.3bz)
 2.5 Gigabit Ethernet (IEEE 802.3bz)
 Gigabit Ethernet (IEEE 802.3ab)
 100 Mbps Ethernet (IEEE 802.3u)
 1000 Mbps ATM
 622 Mbps ATM
 15W PoE (IEEE 802.3af)
 30W PoE+ (IEEE 802.3at)
 60W PoE++ (IEEE 802.3bt Type 3)
 100W PoE++ (IEEE 802.3bt Type 4)

Temp Range

- Storage Temperature
-40°C to +60°C (-40°F to +140°F)
- Installation Temperature
0°C to +60°C (+32°F to +140°F)
- Operation Temperature
-20°C to +75°C (-4°F to +167°F)

Supra™ 660 UTP (Plenum)

c(UL)us Listed Type CMP (UL 910), CSA Type FT6

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30016-8-XXY	4	.22	5.59	25.49	11.56

Supra™ 660 UTP (Riser)

c(UL)us Listed Type CMR (UL 1666), CSA Type FT4

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30022-8-XXY	4	.215	6.09	26.93	12.22

Building a Part Number

Base Part Number Ex.	No. of Conductors	Jacket Color	Reel Type
30016	8	XX	Y


Jacket Colors (XX):

Black(BK); Blue(BL); Brown(BR); Gray(GA); Green(GR); Red(RD); White(WH); Yellow(YE)

Reel Type (Y):

Reelex Boxes(2); Reels(3)

Features

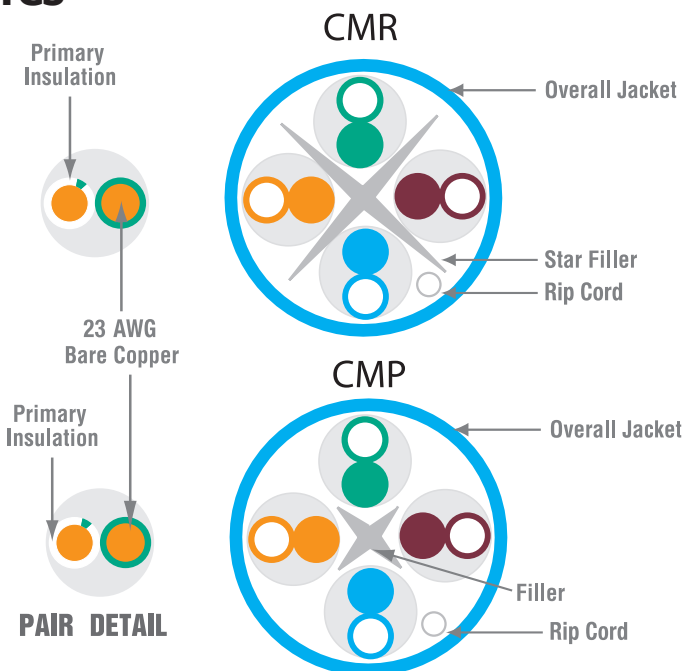

DIELECTRIC MATERIALS	RISER	PLENUM
Primary Insulation	Polyolefin	Plenum-rated fluoropolymer
Overall Jacket	Flame-retardant thermoplastic	Low-smoke, flame-retardant thermoplastic
Star Filler	Flame-retardant thermoplastic	Plenum-rated polymer

Hitachi Cable America reserves the right to revise any specifications.

Enhanced UTP Category 6

Copper

Electrical Characteristics

Input Impedance	100 ± 15Ω (1.0 to 100 MHz) 100 ± 20Ω (100 to 250 MHz)
Maximum conductor resistance	9.38 Ω/100 meters @ 20C
Maximum resistance unbalance	3%
Maximum capacitance unbalance	330 pF/100 meters
Maximum delay skew	35 ns/100 meters (CMP) 45 ns/100 meters (CMR)
Nominal velocity of propagation (NVP)	riser, 68%, plenum, 70%
Voltage Rating	300 Volts

Cable Ampacity Chart							
Bundle Size	1	2-7	8-19	20-37	38-61	62-91	92-192
Cable Temp	75°C	75°C	75°C	75°C	75°C	75°C	75°C
23 AWG	2.5	1.5	1.1	0.8	0.7	0.7	0.5

The table above is derived from the one approved by the National Fire Protection Agency and used in the National Electrical Code, NFPA-70. The complete table can be found in sections 725.144 and 800 Communication Circuits of the code. The table identifies the ampacity of each conductor (in amperes) in a 4-pair Class 2 or Class 3 data cable. Ambient temperature used for development of the table is 30°C (86° F) with all conductors in all cables carrying current. The table is based on 60°C (140°F), 75°C (167°F) and 90°C (194°F) rated cables. All cable temps are operational temp ratings. Cables with temp ratings above 90c would deliver additional power handling capacity.



Photo is for representation purposes only.

Transmission Specifications

ANSI/TIA-568.2-D Category 6 Verified

ISO/IEC 11801, 2nd ed. Class E Compliant

Freq. (MHz)	Ins. Loss		NEXT		PSNEXT		ACR		PSACR		ACRF		PSACRF		Return Loss	
	Std.	Max.	Std.	Min.	Std.	Min.	Cal.	Min.	Cal.	Min.	Std.	Min.	Std.	Min.	Std.	Min.
1	2.0	2.0	74.3	83.3	72.3	81.3	72.3	81.3	70.3	79.3	67.8	75.8	64.8	72.8	20.0	20.0
4	3.8	3.7	65.3	74.3	63.3	72.3	61.5	70.6	59.5	68.6	55.8	63.8	52.8	60.8	23.0	24.2
8	5.3	5.2	60.8	69.8	58.8	67.8	55.4	64.6	53.4	62.6	49.7	57.7	46.7	54.7	24.5	26.3
10	6.0	5.8	59.3	68.3	57.3	66.3	53.3	62.5	51.3	60.5	47.8	55.8	44.8	52.8	25.0	27.0
16	7.6	7.3	56.2	65.2	54.2	63.2	48.7	57.9	46.7	55.9	43.7	51.7	40.7	48.7	25.0	27.0
31.25	10.7	10.4	51.9	60.9	49.9	58.9	41.2	50.5	39.2	48.5	37.9	45.9	34.9	42.9	23.6	25.9
62.5	15.4	14.9	47.4	56.4	45.4	54.4	32.0	41.4	30.0	39.4	31.9	39.9	28.9	36.9	21.5	24.2
100	19.8	19.2	44.3	53.3	42.3	51.3	24.5	34.1	22.5	32.1	27.8	35.8	24.8	32.8	20.1	23.1
155	25.2	24.4	41.1	50.4	39.4	48.4	15.9	26.0	14.3	24.0	24.0	32.	21.0	29.0	18.8	22.0
200	29.0	28.1	39.8	48.8	37.8	46.8	10.8	20.7	8.8	18.7	21.8	29.8	18.8	26.8	18.0	21.4
250	32.8	31.9	38.3	47.3	36.3	45.3	5.5	15.5	3.5	13.5	19.8	27.8	16.8	24.8	17.3	20.9
300*	-	35.3	-	46.1	-	44.1	-	10.8	-	8.8	-	26.3	-	23.3	-	20.4
350*	-	38.6	-	45.1	-	43.1	-	6.5	-	4.5	-	24.9	-	21.9	-	20.1
400*	-	41.7	-	44.3	-	42.3	-	2.6	-	0.6	-	23.8	-	20.8	-	19.7
500*	-	47.5	-	42.8	-	40.8	-	-	-	-	-	21.8	-	18.8	-	19.2
555*	-	50.5	-	42.1	-	40.1	-	-	-	-	-	20.9	-	17.9	-	18.9
660*	-	55.9	-	41.0	-	39.0	-	-	-	-	-	19.4	-	16.4	-	18.5

*Frequencies beyond the TIA and ISO requirements are for information only.

All values are dB/100m.

Cat 6 Premium

Copper

HITACHI
Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant
- Made in USA.
- UL Verified.
- Low Smoke Plenum construction.
- Guaranteed minimum performance.
- Enhanced performance beyond TIA Standard.
- Tested from 1 to 660 MHz.

TIA PARAMETER	GUARANTEED HEADROOM
NEXT loss	+5 dB
PSNEXT loss	+5 dB
ACRF	+6 dB
PSACRF	+6 dB

Packaging

- 1,000 foot (305m) reels
- Reverse sequential footage markings standard on a 1,000 packages.

Options

- CMP-50 rated cables available

Applications

- Including:
 - HDBase-T A & B
 - 5 Gigabit Ethernet (IEEE 802.3bz)
 - 2.5 Gigabit Ethernet (IEEE 802.3bz)
 - Gigabit Ethernet (IEEE 802.3ab)
 - 100 Mbps Ethernet (IEEE 802.3u)
 - 1000 Mbps ATM
 - 622 Mbps ATM
 - 15W PoE (IEEE 802.3af)
 - 30W PoE+ (IEEE 802.3at)
 - 60W PoE++ (IEEE 802.3bt Type 3)
 - 100W PoE++ (IEEE 802.3bt Type 4)

Temp Range

- Storage Temperature
-40°C to +60°C (-40°F to +140°F)
- Installation Temperature
0°C to +60°C (+32°F to +140°F)
- Operation Temperature
-20°C to +75°C (-4°F to +167°F)

Premium UTP (Plenum)

c(UL)us Listed Type CMP (UL 910), CSA Type FT6

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30183-8-XXY	4	.20	5.1	25.74	11.68

Premium UTP (Riser)

c(UL)us Listed Type CMR (UL 1666), CSA Type FT4

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30212-8-XXY	4	.215	6.22	26.93	12.22

Building a Part Number

Base Part Number Ex.	No. of Conductors	Jacket Color	Reel Type
30183	8	XX	Y


Jacket Colors (XX):

Black(BK); Blue(BL); Brown(BR); Gray(GA); Green(GR); Red(RD); White(WH); Yellow(YE)

Reel Type (Y):

Reel Boxes(2); Reels(3)

Features

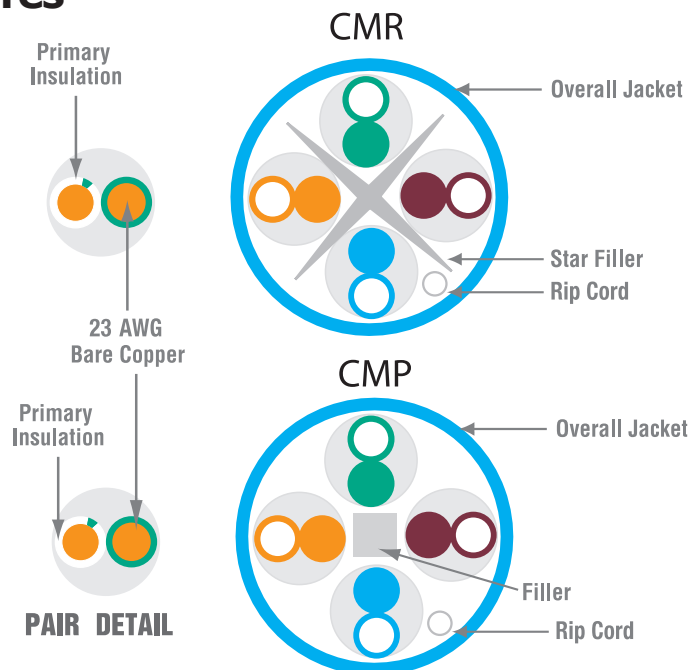

DIELECTRIC MATERIALS	RISER	PLENUM
Primary Insulation	Polyolefin	Plenum-rated fluoropolymer
Overall Jacket	Flame-retardant thermoplastic	Low-smoke, flame-retardant thermoplastic
Star Filler	Flame-retardant thermoplastic	Plenum-rated polymer

Hitachi Cable America reserves the right to revise any specifications.

Electrical Characteristics

Input Impedance	100 ± 15Ω (1.0 to 100 MHz) 100 ± 20Ω (101 to 160 MHz) 100 ± 22Ω (161 to 250 MHz)
Maximum conductor resistance	9.38 Ω/100 meters @ 20°C
Maximum resistance unbalance	3%
Maximum capacitance unbalance	330 pF/100 meters
Maximum delay skew	35 ns/100 meters (CMP) 45 ns/100 meters (CMR)
Nominal velocity of propagation (NVP)	riser, 68% plenum, 70%
Voltage Rating	300 Volts

Cable Ampacity Chart

Bundle Size	1	2-7	8-19	20-37	38-61	62-91	92-192
Cable Temp	75°C	75°C	75°C	75°C	75°C	75°C	75°C
23 AWG	2.5	1.5	1.1	0.8	0.7	0.7	0.5

The table above is derived from the one approved by the National Fire Protection Agency and used in the National Electrical Code, NFPA-70. The complete table can be found in sections 725.144 and 800 Communication Circuits of the code. The table identifies the ampacity of each conductor (in amperes) in a 4-pair Class 2 or Class 3 data cable. Ambient temperature used for development of the table is 30°C (86° F) with all conductors in all cables carrying current. The table is based on 60°C (140°F), 75°C (167°F) and 90°C (194°F) rated cables. All cable temps are operational temp ratings. Cables with temp ratings above 90c would deliver additional power handling capacity.



Photo is for representation purposes only.

Transmission Specifications

ANSI/TIA-568.2-D Category 6 Verified

ISO/IEC 11801, 2nd ed. Class E Compliant

Freq. (MHz)	Ins. Loss		NEXT		PSNEXT		ACR		PSACR		ACRF		PSACRF		Return Loss	
	Std.	Max.	Std.	Min.	Std.	Min.	Cal.	Min.	Cal.	Min.	Std.	Min.	Std.	Min.	Std.	Min.
1	2.0	2.0	74.3	79.3	72.3	77.3	72.3	77.3	70.3	75.3	67.8	73.8	64.8	70.8	20.0	20.0
4	3.8	3.8	65.3	70.3	63.3	68.7	61.5	66.5	59.5	64.5	55.8	61.8	52.8	58.8	23.0	23.0
8	5.3	5.3	60.8	65.8	58.8	63.8	55.4	60.4	53.4	58.4	49.7	55.7	46.7	52.7	24.5	24.5
10	6.0	6.0	59.3	64.3	57.3	62.3	53.3	58.3	51.3	56.3	47.8	53.8	44.8	50.8	25.0	25.0
16	7.6	7.6	56.2	61.2	54.2	59.2	48.7	53.7	46.7	51.7	43.7	49.7	40.7	46.7	25.0	25.0
31.25	10.7	10.7	51.9	56.9	49.9	54.9	41.2	46.2	39.2	44.2	37.9	43.9	34.9	40.9	23.6	23.6
62.50	15.4	15.4	47.4	52.4	45.4	50.4	32.0	37.0	30.0	35.0	31.9	37.9	28.9	34.9	21.5	21.5
100	19.8	19.8	44.3	49.3	42.3	47.3	24.5	29.5	22.5	27.5	27.8	33.8	24.8	30.8	20.1	20.1
155	25.2	25.2	41.1	46.4	39.4	44.4	16.3	21.3	14.3	19.2	24.0	30.0	21.0	27.0	18.8	18.8
200	29.0	29.0	39.8	44.8	37.8	42.8	10.8	15.8	8.8	13.8	21.8	27.8	18.8	24.8	18.0	18.0
250	32.8	32.8	38.3	43.3	36.3	41.3	5.5	10.5	3.5	8.5	19.8	25.8	16.8	22.8	17.3	17.3
300*	-	36.4	-	42.1	-	40.1	0.7	5.7	-	3.7	-	24.3	-	21.3	-	16.8
350*	-	39.8	-	41.1	-	39.1	-	1.4	-	-	-	22.9	-	19.9	-	16.3
400*	-	43.0	-	40.3	-	38.3	-	-	-	-	-	21.8	-	18.8	-	15.9
500*	-	48.9	-	38.8	-	36.8	-	-	-	-	-	19.8	-	16.8	-	15.2
555*	-	52.0	-	38.1	-	36.1	-	-	-	-	-	18.9	-	15.9	-	14.9
660*	-	57.7	-	37.0	-	35.0	-	-	-	-	-	17.4	-	14.4	-	14.4

*Frequencies beyond the TIA and ISO requirements are for information only. All values are dB/100m.

Cat 6 Plus™

Copper

HITACHI

Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- UL Verified.
- Low Smoke Plenum construction.
- Guaranteed minimum performance.
- Enhanced performance beyond TIA Standard.
- Tested from 1 to 555 MHz.

TIA PARAMETER	GUARANTEED HEADROOM
NEXT loss	+3 dB
PSNEXT loss	+3 dB
ACRF	+3 dB
PSACRF	+3 dB

Packaging

- 1,000 foot (305m) reels, Reelex.
- Reverse sequential footage markings standard on a 1,000 packages.

Options

- CMP-50 rated cables available

Applications

- Including:

HDBase-T A & B
 5 Gigabit Ethernet (IEEE 802.3bz)
 2.5 Gigabit Ethernet (IEEE 802.3bz)
 Gigabit Ethernet (IEEE 802.3ab)
 100 Mbps Ethernet (IEEE 802.3u)
 1000 Mbps ATM
 622 Mbps ATM
 15W PoE (IEEE 802.3af)
 30W PoE+ (IEEE 802.3at)
 60W PoE++ (IEEE 802.3bt Type 3)
 100W PoE++ (IEEE 802.3bt Type 4)

Temp Range

- Storage Temperature
-40°C to +60°C (-40°F to +140°F)
- Installation Temperature
0°C to +60°C (+32°F to +140°F)
- Operation Temperature
-20°C to +75°C (-4°F to +167°F)

Plus™ UTP (Plenum)

c(UL)us Listed Type CMP (UL 910), CSA Type FT6

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30025-8-XXY	4	.20	5.1	25.74	11.67

Plus™ UTP (Riser)

c(UL)us Listed Type CMR (UL 1666), CSA Type FT4

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30024-8-XXY	4	.23	5.84	22.87	10.37

Building a Part Number

Base Part Number Ex.	No. of Conductors	Jacket Color	Reel Type
30025	8	XX	Y


Jacket Colors (XX):

Black(BK); Blue(BL); Brown(BR); Gray(GA); Green(GR); Red(RD); White(WH); Yellow(YE)

Reel Type (Y):

Reelex Boxes(2); Reels(3)

Features

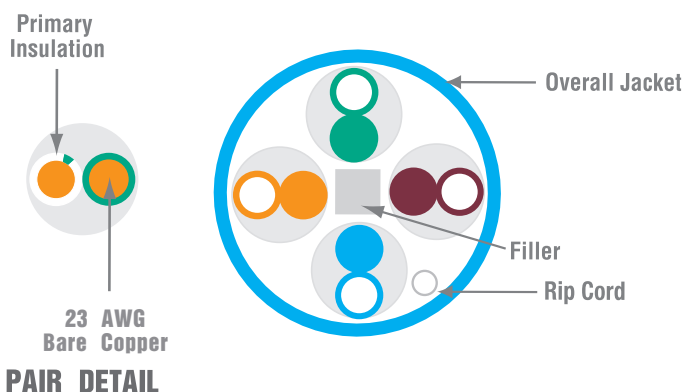

DIELECTRIC MATERIALS	RISER	PLENUM
Primary Insulation	Polyolefin	Plenum-rated fluoropolymer
Overall Jacket	Flame-retardant thermoplastic	Low-smoke, flame-retardant thermoplastic
Filler	Flame-retardant thermoplastic	Plenum-rated polymer

Hitachi Cable America reserves the right to revise any specifications.

Enhanced UTP Category 6

Electrical Characteristics

Input Impedance	100 ± 15Ω (1.0 to 250 MHz)
Maximum conductor resistance	9.38 Ω/100 meters @ 20C
Maximum resistance unbalance	5%
Maximum capacitance unbalance	330 pF/100 meters
Maximum delay skew	45 ns/100 meters
Nominal velocity of propagation (NVP)	riser, 68% plenum, 70%
Voltage Rating	300 Volts

Cable Ampacity Chart							
Bundle Size	1	2-7	8-19	20-37	38-61	62-91	92-192
Cable Temp	75°C	75°C	75°C	75°C	75°C	75°C	75°C
23 AWG	2.5	1.5	1.1	0.8	0.7	0.7	0.5

The table above is derived from the one approved by the National Fire Protection Agency and used in the National Electrical Code, NFPA-70. The complete table can be found in sections 725.144 and 800 Communication Circuits of the code. The table identifies the ampacity of each conductor (in amperes) in a 4-pair Class 2 or Class 3 data cable. Ambient temperature used for development of the table is 30°C (86° F) with all conductors in all cables carrying current. The table is based on 60°C (140°F), 75°C (167°F) and 90°C (194°F) rated cables. All cable temps are operational temp ratings. Cables with temp ratings above 90c would deliver additional power handling capacity.

Photo is for representation purposes only.



Copper

Transmission Specifications

ANSI/TIA-568.2-D Category 6 Verified

ISO/IEC 11801, 2nd ed. Class E Compliant

Freq. (MHz)	Ins. Loss		NEXT		PSNEXT		ACR		PSACR		ACRF		PSACRF		Return Loss	
	Std.	Max.	Std.	Min.	Std.	Min.	Cal.	Min.	Cal.	Min.	Std.	Min.	Std.	Min.	Std.	Min.
1	2.0	2.0	74.3	77.3	72.3	75.3	72.3	75.3	70.3	73.3	67.8	70.8	64.8	67.8	20.0	20.0
4	3.8	3.8	65.3	68.3	63.3	66.3	61.5	64.5	59.5	62.5	55.8	58.8	52.8	55.8	23.0	23.0
8	5.3	5.3	60.8	63.8	58.8	61.8	55.4	58.4	53.4	56.4	49.7	52.7	46.7	49.7	24.5	24.5
10	6.0	6.0	59.3	62.3	57.3	60.3	53.3	56.3	51.3	54.3	47.8	50.8	44.8	47.8	25.0	25.0
16	7.6	7.6	56.2	59.2	54.2	57.2	48.7	51.7	46.7	49.7	43.7	46.7	40.7	43.7	25.0	25.0
31.25	10.7	10.7	51.9	54.9	49.9	52.9	41.2	44.2	39.2	42.2	37.9	40.9	34.9	37.9	23.6	23.6
62.5	15.4	15.4	47.4	50.4	45.4	48.4	32.0	35.0	30.0	33.0	31.9	34.9	28.9	31.9	21.5	21.5
100	19.8	19.8	44.3	47.3	42.3	45.3	24.5	27.5	22.5	25.5	27.8	30.8	24.8	27.8	20.1	20.1
200	29.0	29.0	39.8	42.8	37.8	40.8	10.8	13.8	8.8	11.8	21.8	24.8	18.8	21.8	18.0	18.0
250	32.8	32.8	38.3	41.3	36.3	39.3	5.5	8.5	3.5	6.5	19.8	22.8	16.8	19.8	17.3	17.3
300*	-	36.4	-	40.1	-	38.1	-	3.7	-	1.7	-	21.3	-	18.3	-	16.8
350*	-	39.8	-	39.1	-	37.1	-	-	-	-	-	19.9	-	16.9	-	16.3
400*	-	43.0	-	39.3	-	36.3	-	-	-	-	-	18.8	-	15.8	-	15.9
500*	-	48.9	-	36.8	-	34.8	-	-	-	-	-	16.8	-	13.8	-	15.2
555*	-	52.0	-	36.1	-	34.1	-	-	-	-	-	15.9	-	12.9	-	14.9

*Frequencies beyond the TIA and ISO requirements are for information only.
All values are dB/100m.

Cat 6 xs™

Copper

HITACHI

Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- UL Verified TIA-568-D.2.
- Low Smoke Plenum construction.
- Guaranteed minimum performance.
- Tested from 1 to 555 MHz.
- No internal pair separator.
- Small outside diameter permits more cables per conduit than typical Category 6 cable.
- Standard Reelex package made with 100% post consumer materials.
- CMR-LSZH version offers a halogen free design for improved environmental performance.

Packaging

- 1,000 foot (305m) reels, Reelex.
- Reverse sequential footage markings standard on a 1,000 packages.

Options

- 23 AWG Conductors available

Applications

- Including:
 - 5 Gigabit Ethernet (IEEE 802.3bz)
 - 2.5 Gigabit Ethernet (IEEE 802.3bz)
 - Gigabit Ethernet (IEEE 802.3ab)
 - 100 Mbps Ethernet (IEEE 802.3u)
 - 1000 Mbps ATM
 - 622 Mbps ATM
 - 15W PoE (IEEE 802.3af)
 - 30W PoE+ (IEEE 802.3at)
 - 60W PoE++ (IEEE 802.3bt Type 3)
 - 100W PoE++ (IEEE 802.3bt Type 4)

Temp Range

- Storage Temperature
-40°C to +60°C (-40°F to +140°F)
- Installation Temperature
0°C to +60°C (+32°F to +140°F)
- Operation Temperature
 - Plenum
-20°C to +90°C (-4°F to +194°F)
 - Riser/Low Smoke Halogen Free
-20°C to +75°C (-4°F to +167°F)

XS™ UTP (Plenum)

c(UL)us Listed Type CMP (UL 910), CSA Type FT6

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30237-8-XXY	4	.20	5.08	25.24	11.45

XS™ UTP (Riser)

c(UL)us Listed Type CMR (UL 1666), CSA Type FT4

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30238-8-XXY	4	.21	5.48	23.12	10.5

XS™ UTP (Riser-Low Smoke Zero Halogen)

c(UL)us Listed Type CMR (UL 1666), CSA Type FT44

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30309-8-XXY	4	.21	5.26	23.12	10.5

Building a Part Number

Base Part Number Ex.	No. of Conductors	Jacket Color	Reel Type
30237	8	XX	Y


Jacket Colors (XX):

Black(BK); Blue(BL); Brown(BR); Gray(GA); Green(GR); Red(RD); White(WH); Yellow(YE)

Reel Type (Y):

Reelex Boxes(2); Reels(3)

Features

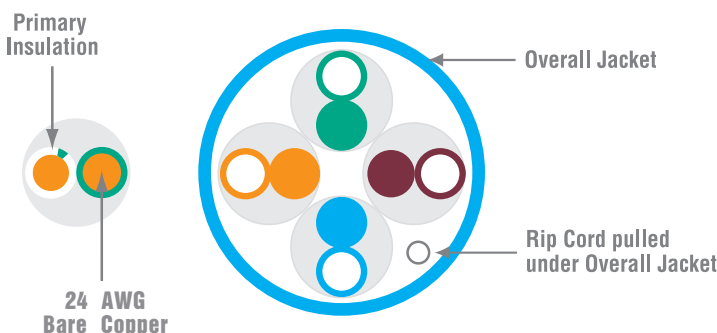

PAIR DETAIL

DIELECTRIC MATERIALS	RISER	PLENUM	LSZH
Primary Insulation	Polyolefin	Plenum-rated Fluoropolymer	Polyethylene
Overall Jacket	Flame-retardant Thermoplastic	Flame-retardant Thermoplastic	Zero-Halogen Flame-retardant Thermoplastic

Hitachi Cable America reserves the right to revise any specifications.

UTP Category 6

Electrical Characteristics

Input Impedance	100 ± 15Ω (1.0 to 100 MHz) 100 ± 20Ω (101 to 250 MHz)
Maximum resistance unbalance	5%
Maximum capacitance unbalance	330 pF/100 meters
Maximum delay skew	45 ns/100 meters
Nominal velocity of propagation (NVP)	riser, 68% plenum, 70%
Voltage Rating	300 Volts

Cable Ampacity Chart														
Bundle Size	1		2-7		8-19		20-37		38-61		62-91		92-192	
Cable Temp	75°C	90°C	75°C	90°C	75°C	90°C	75°C	90°C	75°C	90°C	75°C	90°C	75°C	90°C
24 AWG	2.0	2.0	1.4	1.6	1.0	1.1	0.7	0.9	0.6	0.7	0.5	0.6	0.4	0.5
The table above is derived from the one approved by the National Fire Protection Agency and used in the National Electrical Code, NFPA-70. The complete table can be found in sections 725.144 and 800 Communication Circuits of the code. The table identifies the ampacity of each conductor (in amperes) in a 4-pair Class 2 or Class 3 data cable. Ambient temperature used for development of the table is 30°C (86° F) with all conductors in all cables carrying current. The table is based on 60°C (140°F), 75°C (167°F) and 90°C (194°F) rated cables. All cable temps are operational temp ratings. Cables with temp ratings above 90c would deliver additional power handling capacity.														

Photo is for representation purposes only.

Copper

Transmission Specifications

ANSI/TIA-568.2-D Category 6 Verified
ISO/IEC 11801, 2nd ed. Class E Compliant

Freq. (MHz)	Ins. Loss		NEXT		PSNEXT		ACR		PSACR		ACRF		PSACRF		Return Loss	
	Std.	Max.	Std.	Min.	Std.	Min.	Cal.	Min.	Cal.	Min.	Std.	Min.	Std.	Min.	Std.	Min.
1	2.0	2.0	74.3	74.3	72.3	72.3	72.3	72.3	70.3	70.3	67.8	67.8	64.8	64.8	20.0	20.0
4	3.8	3.8	65.3	65.3	63.3	63.3	61.5	61.5	59.5	59.5	55.8	55.8	52.8	52.8	23.0	23.0
8	5.3	5.3	60.8	60.8	58.8	58.8	55.4	55.4	53.4	53.4	49.7	49.7	46.7	46.7	24.5	24.5
10	6.0	6.0	59.3	59.3	57.3	57.3	53.3	53.3	51.3	51.3	47.8	47.8	44.8	44.8	25.0	25.0
16	7.6	7.6	56.2	56.2	54.2	54.2	48.7	48.7	46.7	46.7	43.7	43.7	40.7	40.7	25.0	25.0
31.25	10.7	10.7	51.9	51.9	49.9	49.9	41.2	41.2	39.2	39.2	37.9	37.9	34.9	34.9	23.6	23.6
62.5	15.4	15.4	47.4	47.4	45.4	45.4	32.0	32.0	30.0	30.0	31.9	31.9	28.9	28.9	21.5	21.5
100	19.8	19.8	44.3	44.3	42.3	42.3	24.5	24.5	22.5	22.5	27.8	27.8	24.8	24.8	20.1	20.1
200	29.0	29.0	39.8	39.8	37.8	37.8	10.8	10.8	8.8	8.8	21.8	21.8	18.8	18.8	18.0	18.0
250	32.8	32.8	38.3	38.3	36.3	36.3	5.5	5.5	3.5	3.5	19.8	19.8	16.8	16.8	17.3	17.3
300*	-	36.4	-	37.1	-	35.1	-	-	-	-	-	18.3	-	15.3	-	16.8
350*	-	39.8	-	36.1	-	34.1	-	-	-	-	-	16.9	-	13.9	-	16.3
400*	-	43.0	-	35.3	-	33.3	-	-	-	-	-	15.8	-	12.8	-	15.9
500*	-	48.9	-	33.8	-	31.8	-	-	-	-	-	13.8	-	10.8	-	15.2
555*	-	52.0	-	33.1	-	31.1	-	-	-	-	-	12.9	-	9.9	-	14.9

*Frequencies beyond the TIA and ISO requirements are for information only.
All values are dB/100m.

Cat 6 DryBit™

Indoor/Outdoor (CMP) Cable

Copper

HITACHI Inspire the Next

Product Highlights

- REACH & RoHS compliant.
- Made in USA.
- Guaranteed minimum performance.
- Tested from 1 to 555 MHz.
- UL Verified TIA-568-D.2 Category 6.
- UL Verified (UL B627696) for long term water submersion.
- UL Listed for use in plenum areas.
- UV resistant jacket.
- Specifically designed for below-grade conduit or other environments where water is likely to infiltrate.
- Ideal for industrial & harsh environments.
- Resistant to over 2,000 chemicals.
- No-gel construction simplifies termination.
- Drybit Barrier ensures optimum electrical performance even in harsh environments.
- Available in both UTP and FUTP.
- Standard jacket color is black. Custom colors available.

Packaging

- 1,000 foot (305m) reels.

Applications

- Including:
 - HDBase-T
 - 5 Gigabit Ethernet (IEEE 802.3bz)
 - 2.5 Gigabit Ethernet (IEEE 802.3bz)
 - Gigabit Ethernet (IEEE 802.3ab)
 - 100 Mbps Ethernet (IEEE 802.3u)
 - 1000 Mbps ATM
 - 622 Mbps ATM
 - 15W PoE (IEEE 802.3af)
 - 30W PoE+ (IEEE 802.3at)
 - 60W PoE++ (IEEE 802.3bt Type 3)
 - 100W PoE++ (IEEE 802.3bt Type 4)

Temp Range

- Storage Temperature
 - 40°C to +70°C (-40°F to +158°F).
- Installation Temperature
 - 0°C to +60°C (+32°F to +140°F).
- Operation Temperature
 - 40°C to +90°C (-40°F to +194°F).

DryBit™ Indoor-Outdoor CMP UTP (Plenum)


c(UL)us Listed Type CMP (UL 910), CSA Type FT6

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30315-8-BK3	4	.31	7.87	54.7	24.8


DryBit™ Indoor-Outdoor CMP FUTP (Plenum)

c(UL)us Listed Type CMP (UL 910), CSA Type FT6

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30277-8-BK3	4	.31	7.87	56.0	25.4

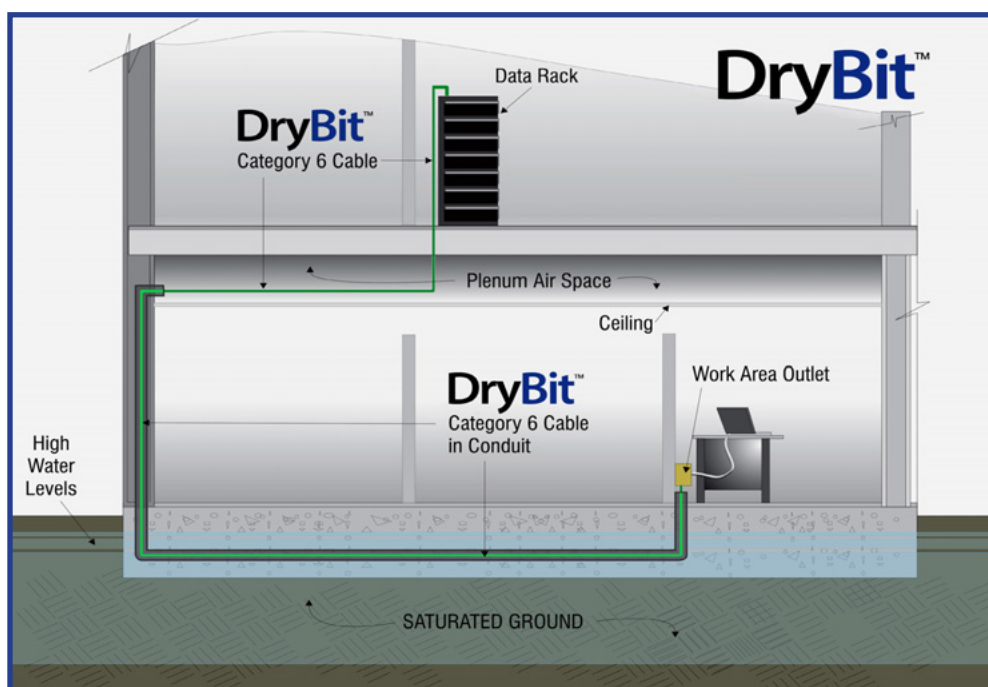

Features

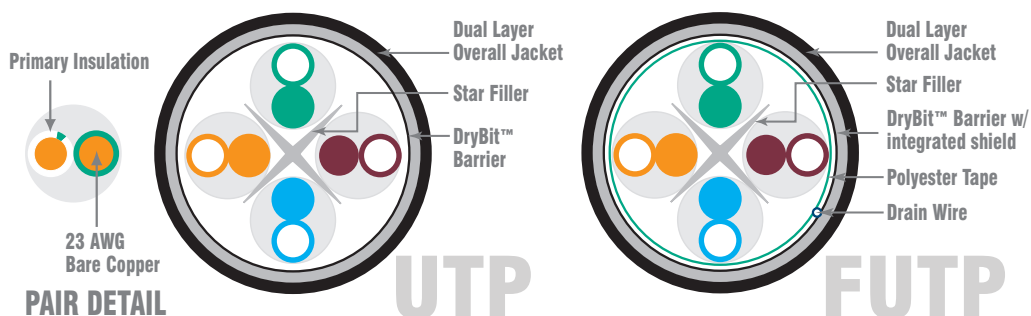

DIELECTRIC MATERIALS
Primary Insulation
Overall Jacket

PLENUM
Plenum-rated fluoropolymer
Low-smoke, flame-retardant thermoplastic

Installation Notes: To ensure safe operation, install cables according to all applicable local and national electrical codes.

"During installation, take precautions to ensure any water present in pathway does not enter the open end of the cable. Water infiltration via the open ends of the cable will negatively impact cable performance and void any applicable product warranty."

Category 6

UTP & FUTP


Electrical Characteristics

Input Impedance	100 ± 15Ω (1.0 to 250 MHz)
Maximum conductor resistance	9.38 Ω/100 meters @ 20C
Maximum resistance unbalance	5%
Maximum capacitance unbalance	330 pF/100 meters
Maximum delay skew	45 ns/100 meters
Nominal velocity of propagation (NVP)	plenum, 70%
Voltage Rating	300 Volts

Cable Ampacity Chart

Bundle Size	1	2-7	8-19	20-37	38-61	62-91	92-192
Cable Temp	90°C	90°C	90°C	90°C	90°C	90°C	90°C
23 AWG	2.5	1.7	1.2	0.9	0.8	0.8	0.6

The table above is derived from the one approved by the National Fire Protection Agency and used in the National Electrical Code, NFPA-70. The complete table can be found in sections 725.144 and 800 Communication Circuits of the code. The table identifies the ampacity of each conductor (in amperes) in a 4-pair Class 2 or Class 3 data cable. Ambient temperature used for development of the table is 30°C (86°F) with all conductors in all cables carrying current. The table is based on 60°C (140°F), 75°C (167°F) and 90°C (194°F) rated cables. All cable temps are operational temp ratings. Cables with temp ratings above 90c would deliver additional power handling capacity.

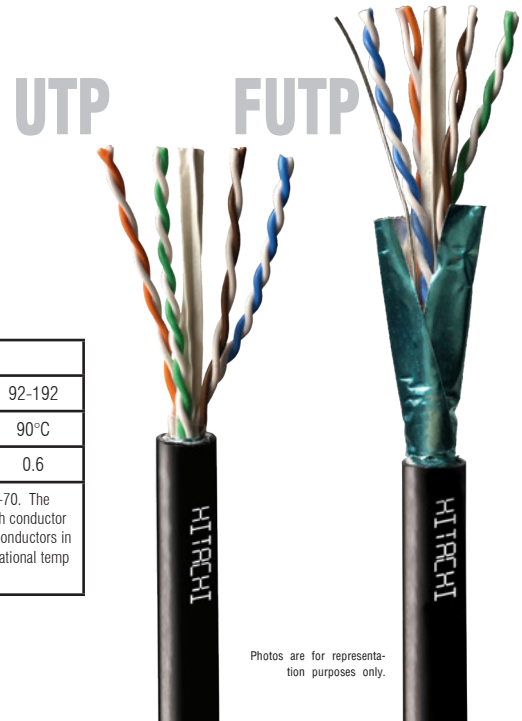

Photos are for representation purposes only.

Copper

Transmission Specifications

ANSI/TIA-568.2-D Category 6 Verified

ISO/IEC 11801, 2nd ed. Class E Compliant

Freq. (MHz)	Ins. Loss		NEXT		PSNEXT		ACR		PSACR		ACRF		PSACRF		Return Loss	
	Std.	Max.	Std.	Min.	Std.	Min.	Cal.	Min.	Cal.	Min.	Std.	Min.	Std.	Min.	Std.	Min.
1	2.0	2.0	74.3	74.3	72.3	72.3	72.3	72.3	70.3	70.3	67.8	67.8	64.8	64.8	20.0	20.0
4	3.8	3.8	65.3	65.3	63.3	63.3	61.5	61.5	59.5	59.5	55.8	55.8	52.8	52.8	23.0	23.0
8	5.3	5.3	60.8	60.8	58.8	58.8	55.4	55.4	53.4	53.4	49.7	49.7	46.7	46.7	24.5	24.5
10	6.0	6.0	59.3	59.3	57.3	57.3	53.3	53.3	51.3	51.3	47.8	47.8	44.8	44.8	25.0	25.0
16	7.6	7.6	56.2	56.2	54.2	54.2	48.7	48.7	46.7	46.7	43.7	43.7	40.7	40.7	25.0	25.0
31.25	10.7	10.7	51.9	51.9	49.9	49.9	41.2	41.2	39.2	39.2	37.9	37.9	34.9	34.9	23.6	23.6
62.5	15.4	15.4	47.4	47.4	45.4	45.4	32.0	32.0	30.0	30.0	31.9	31.9	28.9	28.9	21.5	21.5
100	19.8	19.8	44.3	44.3	42.3	42.3	24.5	24.5	22.5	22.5	27.8	27.8	24.8	24.8	20.1	20.1
200	29.0	29.0	39.8	39.8	37.8	37.8	10.8	10.8	8.8	8.8	21.8	21.8	18.8	18.8	18.0	18.0
250	32.8	32.8	38.3	38.3	36.3	36.3	5.5	5.5	3.5	3.5	19.8	19.8	16.8	16.8	17.3	17.3
300*	-	36.4	-	37.1	-	35.1	-	-	-	-	-	18.3	-	15.3	-	16.8
350*	-	39.8	-	36.1	-	34.1	-	-	-	-	-	16.9	-	13.9	-	16.3
400*	-	43.0	-	35.3	-	33.3	-	-	-	-	-	15.8	-	12.8	-	15.9
500*	-	48.9	-	33.8	-	31.8	-	-	-	-	-	13.8	-	10.8	-	15.2
555*	-	52.0	-	33.1	-	31.1	-	-	-	-	-	12.9	-	9.9	-	14.9

*Frequencies beyond the TIA and ISO requirements are for information only.
All values are dB/100m.

Hitachi Cable America reserves the right to revise any specifications.

Cat 6 Outdoor

Copper

HITACHI Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant
- Made in USA.
- Suitable for direct burial, lashed aerial, duct and underground conduit applications.
- Cable core is filled with non-conductive, water-blocking gel.
- Rugged black polyolefin jacket.
- UV resistant jacket.

Packaging

- 1,000 foot (305m) reels
- Reverse sequential footage markings standard on a 1,000 packages.

Applications

- Including:
 - HDBase-T A & B (Cat 6)
 - 5 Gigabit Ethernet (IEEE 802.3bz) (Cat 6)
 - 2.5 Gigabit Ethernet (IEEE 802.3bz)
 - Gigabit Ethernet (IEEE 802.3ab)
 - 100 Mbps Ethernet (IEEE 802.3u)
 - 1000 Mbps ATM
 - 622 Mbps ATM
 - 15W PoE (IEEE 802.3af)
 - 30W PoE+ (IEEE 802.3at)
 - 60W PoE++ (IEEE 802.3bt Type 3)
 - 100W PoE++ (IEEE 802.3bt Type 4)

Temp Range

- Storage Temperature
-40°C to +70°C (-40°F to +158°F)
- Installation Temperature
-20°C to +70°C (-4°F to +158°F)
- Operation Temperature
-40°C to +70°C (-40°F to +158°F)

Category 6 UTP Outdoor

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	CABLE mm	WEIGHT lbs/1000ft	kg/305m
Category 6					
30180-8-XXY	4	0.270	6.858	34.65	15.72

Building a Part Number

Base Part Number Ex.	No. of Conductors	Jacket Color	Reel Type
30180	8	XX	Y


Jacket Colors (XX):

Black(BK)

Reel Type (Y):

Reels(3)

Features

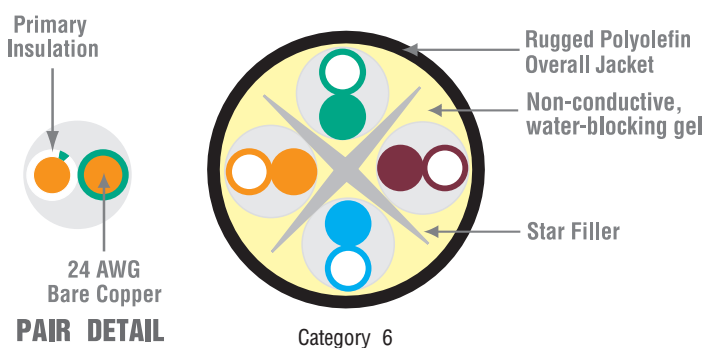

DIELECTRIC MATERIALS	OUTDOOR UTP CABLES
Primary Insulation	Polyolefin
Overall Jacket	Medium density polyolefin

Hitachi Cable America reserves the right to revise any specifications.

Outdoor Cable

Special Applications


Electrical Characteristics

Input impedance	100 ± 15 Ω (1.0 to 100 MHz)
	100 ± 20 Ω (101 to 250 MHz)
Maximum resistance unbalance	5%
Voltage Rating	300 Volts
Maximum capacitance unbalance	330 pF/100 meters
Maximum delay skew	45 ns/100 meters
Nominal velocity of propagation (NVP)	63%

Cable Ampacity Chart

Bundle Size	1	2-7	8-19	20-37	38-61	62-91	92-192
Cable Temp	60°C	60°C	60°C	60°C	60°C	60°C	60°C
24 AWG	2.0	1.0	0.8	0.6	0.5	0.4	0.3

The table above is derived from the one approved by the National Fire Protection Agency and used in the National Electrical Code, NFPA-70. The complete table can be found in sections 725.144 and 800 Communication Circuits of the code. The table identifies the ampacity of each conductor (in amperes) in a 4-pair Class 2 or Class 3 data cable. Ambient temperature used for development of the table is 30°C (86°F) with all conductors in all cables carrying current. The table is based on 60°C (140°F), 75°C (167°F) and 90°C (194°F) rated cables. All cable temps are operational temp ratings. Cables with temp ratings above 90c would deliver additional power handling capacity.

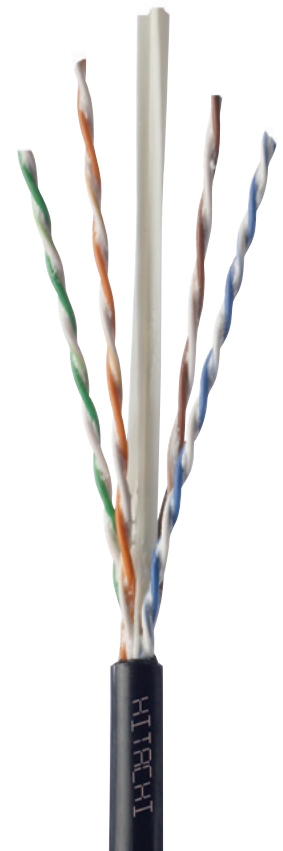

Copper

Transmission Specifications

ANSI/TIA-568.2-D Category 6 Compliant

ISO/IEC 11801, 2nd ed. Class E Compliant

Freq. (MHz)	Ins. Loss		NEXT		PSNEXT		ACR		PSACR		ACRF		PSACRF		Return Loss	
	Std.	Max.	Std.	Min.	Std.	Min.	Cal.	Min.	Cal.	Min.	Std.	Min.	Std.	Min.	Std.	Min.
1	2.0	2.0	74.3	74.3	72.3	72.3	72.3	72.3	70.3	70.3	67.8	67.8	64.8	64.8	20.0	20.0
4	3.8	3.8	65.3	65.3	63.3	63.3	61.5	61.5	59.5	59.5	55.8	55.8	52.8	52.8	23.0	23.0
8	5.3	5.3	60.8	60.8	58.8	58.8	55.4	55.4	53.4	53.4	49.7	49.7	46.7	46.7	24.5	24.5
10	6.0	6.0	59.3	59.3	57.3	57.3	53.3	53.3	51.3	51.3	47.8	47.8	44.8	44.8	25.0	25.0
16	7.6	7.6	56.2	56.2	54.2	54.2	48.7	48.7	46.7	46.7	43.7	43.7	40.7	40.7	25.0	25.0
31.25	10.7	10.7	51.9	51.9	49.9	49.9	41.2	41.2	39.2	39.2	37.9	37.9	34.9	34.9	23.6	23.6
62.5	15.4	15.4	47.4	47.4	45.4	45.4	32.0	32.0	30.0	30.0	31.9	21.9	28.9	28.9	21.5	21.5
100	19.8	19.8	44.3	44.3	42.3	42.3	24.5	24.5	22.5	22.5	27.8	27.8	24.8	24.8	20.1	20.1
155	25.2	25.2	41.1	41.1	39.4	39.4	16.3	16.3	14.3	14.3	24.0	24.0	21.0	21.0	18.8	18.8
200	29.0	29.0	39.8	39.8	37.8	37.8	10.8	10.8	8.8	8.8	21.8	21.8	18.8	18.8	18.0	18.0
250	32.8	32.8	38.3	38.3	36.3	36.3	5.5	5.5	3.5	3.5	19.8	19.8	16.8	16.8	17.3	17.3
350*	-	39.8	-	36.1	-	34.1	-	-	-	-	-	16.9	-	13.9	-	16.3
555*	-	52.0	-	33.1	-	31.1	-	-	-	-	-	12.9	-	9.9	-	14.9
660*	-	57.7	-	32.0	-	30.0	-	-	-	-	-	11.4	-	8.4	-	14.4

*Frequencies beyond the TIA and ISO requirements are for information only.
All values are dB/100m.

Cat 5e F/UTP

HITACHI Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant
- Made in USA.
- UL Verified.
- Low Smoke Plenum construction.
- Tested from 1 to 400 MHz.
- Proven shield technology improves RFI and EMI performance.

Packaging

- 1,000 foot (305m) reels
- Reverse sequential footage markings standard on a 1,000 packages.

Applications

- Including:
 - Gigabit Ethernet (IEEE 802.3ab)
 - 100 Mbps Ethernet (IEEE 802.3u)
 - 1000 Mbps ATM
 - 622 Mbps ATM
 - 15W PoE (IEEE 802.3af)
 - 30W PoE+ (IEEE 802.3at)
 - 60W PoE++ (IEEE 802.3bt Type 3)

Temp Range

- Storage Temperature
 - 40°C to +60°C (-40°F to +140°F)
- Installation Temperature
 - 0°C to +60°C (+32°F to +140°F)
- Operation Temperature
 - 20°C to +75°C (-4°F to +167°F)

Category 5e F/UTP (Plenum)

c(UL)us Listed Type CMP (UL 910), CSA Type FT6

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
38653-8-XXY	4	.25	6.48	33.33	15.12

Category 5e F/UTP (Riser)

c(UL)us Listed Type CMR (UL 1666), CSA Type FT4

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
39092-8-XXY	4	.25	6.48	30.93	14.03

Building a Part Number

Base Part Number Ex.	No. of Conductors	Jacket Color	Reel Type
38653	8	XX	Y


Jacket Colors (XX):

Black(BK); Blue(BL); Brown(BR); Gray(GA); Green(GR); Red(RD); White(WH); Yellow(YE)

Reel Type (Y):

Reels(3)

Features

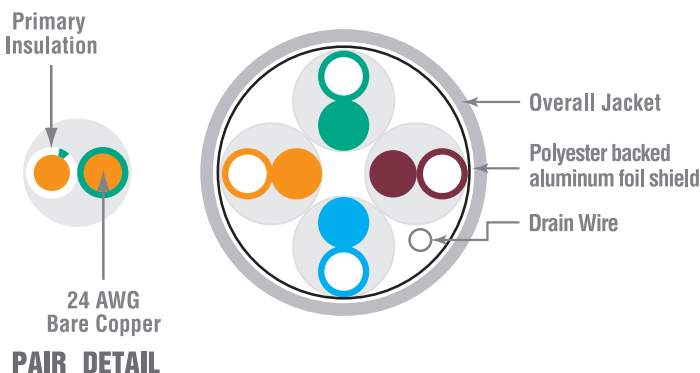

DIELECTRIC MATERIALS

Primary Insulation
Overall Jacket

RISER

Flame-retardant thermoplastic
Flame-retardant thermoplastic

PLENUM

Plenum-rated fluoropolymer
Low-smoke, flame-retardant thermoplastic

Hitachi Cable America reserves the right to revise any specifications.

F/UTP Category 5e

Copper

Electrical Characteristics

Input impedance	100 ± 15Ω (1.0 to 100 MHz)
Maximum resistance unbalance	5%
Maximum capacitance unbalance	330 pF/100 meters
Maximum delay skew	45 ns/100 meters
Nominal velocity of propagation (NVP)	68%, riser 70%, plenum
Voltage Rating	300 Volts

Cable Ampacity Chart							
Bundle Size	1	2-7	8-19	20-37	38-61	62-91	92-192
Cable Temp	75°C	75°C	75°C	75°C	75°C	75°C	75°C
24 AWG	2.0	1.4	1.0	0.7	0.6	0.5	0.4

The table above is derived from the one approved by the National Fire Protection Agency and used in the National Electrical Code, NFPA-70. The complete table can be found in sections 725.144 and 800 Communication Circuits of the code. The table identifies the ampacity of each conductor (in amperes) in a 4-pair Class 2 or Class 3 data cable. Ambient temperature used for development of the table is 30°C (86° F) with all conductors in all cables carrying current. The table is based on 60°C (140°F), 75°C (167°F) and 90°C (194°F) rated cables. All cable temps are operational temp ratings. Cables with temp ratings above 90c would deliver additional power handling capacity.



Photo is for representation purposes only.

Transmission Specifications

ANSI/TIA-568.2-D Category 5e Verified

ISO/IEC 11801, 2nd ed. Class D Compliant

Freq. (MHz)	Ins. Loss		NEXT		PSNEXT		ACR		PSACR		ACRF		PSACRF		Return Loss	
	Std.	Max.	Std.	Min.	Std.	Min.	Cal.	Min.	Cal.	Min.	Std.	Min.	Std.	Min.	Std.	Min.
1	2.0	2.0	65.3	65.3	62.3	62.3	63.3	63.3	60.3	60.3	63.8	63.8	60.8	60.8	20.0	20.0
4	4.1	4.1	56.3	56.3	53.3	53.3	52.2	52.2	49.2	49.2	51.8	51.8	48.8	48.8	23.0	23.0
8	5.8	5.8	51.8	51.8	48.8	48.8	46.0	46.0	43.0	43.0	45.7	45.7	42.7	42.7	24.5	24.5
10	6.5	6.5	50.3	50.3	47.3	47.3	43.8	43.8	40.8	40.8	43.8	43.8	40.8	40.8	25.0	25.0
16	8.2	8.2	47.2	47.2	44.2	44.2	39.0	39.0	36.0	36.0	39.7	39.7	36.7	36.7	25.0	25.0
31.25	11.7	11.7	42.9	42.9	39.9	39.9	31.2	31.2	28.2	28.2	33.9	33.9	30.9	30.9	23.6	23.6
62.5	17.0	17.0	38.4	38.4	35.4	35.4	21.4	21.4	18.4	18.4	27.9	27.9	24.9	24.9	21.5	21.5
100	22.0	22.0	35.3	35.3	32.3	32.3	13.3	13.3	10.3	10.3	23.8	23.8	20.8	20.8	20.1	20.1
155*	-	28.1	-	32.4	-	29.4	4.3	4.3	1.3	1.3	-	20.0	-	17.0	-	18.8
200*	-	32.4	-	30.8	-	27.8	-	-	-	-	-	17.8	-	14.8	-	18.0
250*	-	36.9	-	29.3	-	26.3	-	-	-	-	-	15.8	-	12.8	-	17.3
400*	-	48.5	-	26.3	-	23.3	-	-	-	-	-	11.8	-	8.8	-	15.9

*Frequencies beyond the TIA and ISO requirements are for information only.

All values are dB/100m.

Cat 5e 350™

Copper

HITACHI

Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- UL Verified.
- Low Smoke Plenum construction.
- Tested from 1 to 400 MHz.

TIA PARAMETER	GUARANTEED HEADROOM
NEXT loss	+6 dB
PSNEXT loss	+6 dB
ELFEXT	+4 dB
PSELFEXT	+4 dB
Return loss	N/A

Packaging

- 1,000 foot (305m) reels, Reelex.
- Reverse sequential footage markings standard on a 1,000 packages.

Options

- CMP-50 rated cables available

Applications

- Including:
 - Gigabit Ethernet (IEEE 802.3ab)
 - 100 Mbps Ethernet (IEEE 802.3u)
 - 1000 Mbps ATM
 - 622 Mbps ATM
 - 15W PoE (IEEE 802.3af)
 - 30W PoE+ (IEEE 802.3at)
 - 60W PoE++ (IEEE 802.3bt Type 3)

Temp Range

- Storage Temperature
-40°C to +60°C (-40°F to +140°F)
- Installation Temperature
0°C to +60°C (+32°F to +140°F)
- Operation Temperature
-20°C to +75°C (-4°F to +167°F)

350™ UTP (Plenum)

c(UL)us Listed Type CMP (UL 910), CSA Type FT6

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
38891-8-XXY	4	.18	4.67	20.36	9.24

350™ UTP (Riser)

c(UL)us Listed Type CMR (UL 1666), CSA Type FT4

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
38893-8-XXY	4	.179	4.547	17.86	8.10

Building a Part Number

Base Part Number Ex.	No. of Conductors	Jacket Color	Reel Type
38891	8	XX	Y


Jacket Colors (XX):

Black(BK); Blue(BL); Brown(BR); Gray(GA); Green(GR); Red(RD); White(WH); Yellow(YE)

Reel Type (Y):

Reelex Boxes(2); Reels(3)

Features

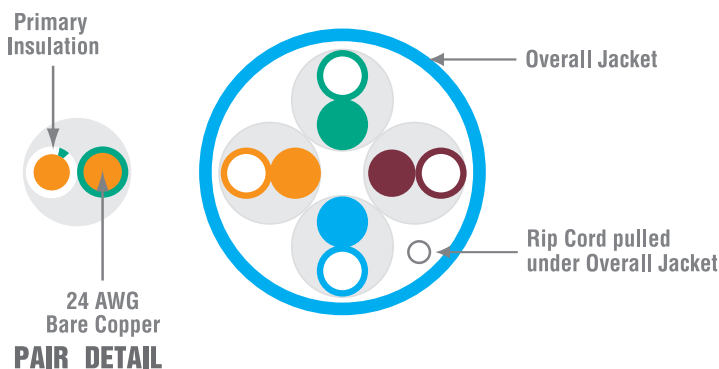

DIELECTRIC MATERIALS	RISER	PLENUM
Primary Insulation	Polyolefin	Plenum-rated fluoropolymer
Overall Jacket	Flame-retardant thermoplastic	Low-smoke, flame-retardant thermoplastic

Hitachi Cable America reserves the right to revise any specifications.

Electrical Characteristics

Input Impedance	100 ± 15Ω (1.0 - 100 MHz)
Maximum conductor resistance	9.38 Ω/100 meters @ 20C
Maximum resistance unbalance	5%
Maximum capacitance unbalance	330 pF/100 meters
Nominal velocity of propagation (NVP)	riser, 68% plenum, 70%
Maximum delay skew	25 ns/100 meters
Voltage Rating	300 Volts

Cable Ampacity Chart							
Bundle Size	1	2-7	8-19	20-37	38-61	62-91	92-192
Cable Temp	75°C	75°C	75°C	75°C	75°C	75°C	75°C
24 AWG	2.0	1.4	1.0	0.7	0.6	0.5	0.4

The table above is derived from the one approved by the National Fire Protection Agency and used in the National Electrical Code, NFPA-70. The complete table can be found in sections 725.144 and 800 Communication Circuits of the code. The table identifies the ampacity of each conductor (in amperes) in a 4-pair Class 2 or Class 3 data cable. Ambient temperature used for development of the table is 30°C (86° F) with all conductors in all cables carrying current. The table is based on 60°C (140°F), 75°C (167°F) and 90°C (194°F) rated cables. All cable temps are operational temp ratings. Cables with temp ratings above 90c would deliver additional power handling capacity.



Photo is for representation purposes only.

Copper

Transmission Specifications

ANSI/TIA-568.2-D Category 5e Verified

ISO/IEC 11801, 2nd ed. Class D Compliant

Freq. (MHz)	Ins. Loss		NEXT		PSNEXT		ACR		PSACR		ACRF		PSACRF		Return Loss	
	Std.	Max.	Std.	Min.	Std.	Min.	Cal.	Min.	Cal.	Min.	Std.	Min.	Std.	Min.	Std.	Min.
1	2.0	2.0	65.3	71.3	62.3	68.3	63.3	69.3	60.3	66.3	63.8	67.8	60.8	64.8	20.0	20.0
4	4.1	4.1	56.3	62.3	53.3	59.3	52.2	58.2	49.2	55.2	51.8	55.8	48.8	52.8	23.0	23.0
8	5.8	5.8	51.8	57.8	48.8	54.8	46.0	52.0	43.0	49.0	45.7	49.7	42.7	46.7	24.5	24.5
10	6.5	6.5	50.3	56.3	47.3	53.3	43.8	49.8	40.8	46.8	43.8	47.8	40.8	44.8	25.0	25.0
16	8.2	8.2	47.2	53.2	44.2	50.2	39.0	45.0	36.0	42.0	39.7	43.7	36.7	40.7	25.0	25.0
31.25	11.7	11.7	42.9	48.9	39.9	45.9	31.2	37.2	28.2	34.2	33.9	37.9	30.9	34.9	23.6	23.6
62.5	17.0	17.0	38.4	44.4	35.4	41.4	21.4	27.4	18.4	24.4	27.9	31.9	24.9	28.9	21.5	21.5
100	22.0	22.0	35.3	41.3	32.3	38.3	13.3	19.3	10.3	16.3	23.8	27.8	20.8	24.8	20.1	20.1
155*	-	28.1	-	38.4	-	35.4	4.4	10.4	1.4	7.4	-	24.0	-	21.0	-	18.8
200*	-	32.4	-	36.8	-	33.8	-	4.4	-	1.4	-	21.8	-	18.8	-	18.0
250*	-	36.9	-	35.3	-	32.3	-	-	-	-	-	19.8	-	16.8	-	17.3
300*	-	41.0	-	34.1	-	31.1	-	-	-	-	-	18.3	-	15.3	-	16.8
350*	-	44.9	-	33.1	-	30.1	-	-	-	-	-	16.9	-	13.9	-	16.3
400*	-	48.5	-	32.3	-	29.3	-	-	-	-	-	15.8	-	12.8	-	15.9

*Frequencies beyond the TIA and ISO requirements are for information only.

All values are dB/100m.

Cat 5e

HITACHI Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- UL Verified.
- Low Smoke Plenum construction.
- Tested from 1 to 400 MHz.
- CMR-LSZH version offers a halogen free design for improved environmental performance.

Packaging

- 1,000 foot (305m) reels, Reelex.
- Reverse sequential footage markings standard on a 1,000 packages.

Options

- CMP-50 rated cables available

Applications

- Including:
 - Gigabit Ethernet (IEEE 802.3ab)
 - 100 Mbps Ethernet (IEEE 802.3u)
 - 1000 Mbps ATM
 - 622 Mbps ATM
 - 15W PoE (IEEE 802.3af)
 - 30W PoE+ (IEEE 802.3at)
 - 60W PoE++ (IEEE 802.3bt Type 3)

Temp Range

- Storage Temperature
-40°C to +60°C (-40°F to +140°F)
- Installation Temperature
0°C to +60°C (+32°F to +140°F)
- Operation Temperature
-20°C to +75°C (-4°F to +167°F)

Category 5e UTP (Plenum)

c(UL)us Listed Type CMP (UL 910), CSA Type FT6

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
39419-8-XXY	4	.18	4.57	20.36	9.24

Category 5e UTP (Riser)

c(UL)us Listed Type CMR (UL 1666), CSA Type FT4

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
38696-8-XXY	4	.17	4.55	17.86	8.10

Category 5e UTP (Riser-Low Smoke Zero Halogen)

c(UL)us Listed Type CMR (UL 1666), CSA Type FT44

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30308-8-XXY	4	.189	4.80	20.37	9.24

Building a Part Number

Base Part Number Ex.	No. of Conductors	Jacket Color	Reel Type
39419	8	XX	Y


Jacket Colors (XX):

Black(BK); Blue(BL); Brown(BR); Gray(GA); Green(GR); Red(RD); White(WH); Yellow(YE)

Reel Type (Y):

Reelex Boxes(2); Reels(3)

Features

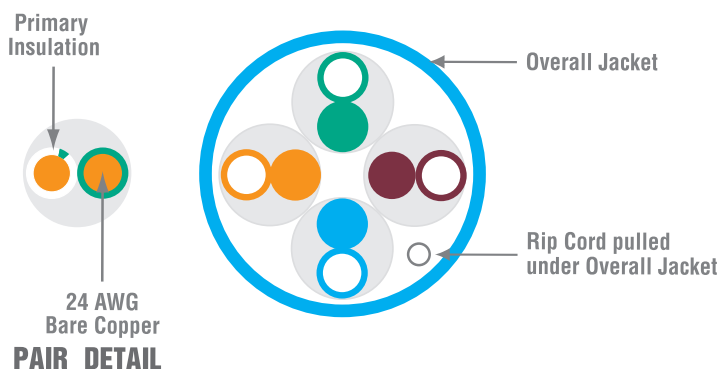

DIELECTRIC MATERIALS

Primary Insulation

Overall Jacket

RISER

Polyolefin

Flame-retardant Thermoplastic

PLENUM

Plenum-rated Fluoropolymer

Flame-retardant Thermoplastic

LSZH

Polyethylene

Zero-Halogen Flame-retardant Thermoplastic

Hitachi Cable America reserves the right to revise any specifications.

UTP Category 5e

Copper

Electrical Characteristics

Input impedance	100 ± 15Ω (1.0 to 100 MHz)
Maximum resistance unbalance	5%
Maximum capacitance unbalance	330 pF/100 meters
Maximum delay skew	45 ns/100 meters
Nominal velocity of propagation (NVP)	68%, riser 70%, plenum
Voltage Rating	300 Volts

Cable Ampacity Chart							
Bundle Size	1	2-7	8-19	20-37	38-61	62-91	92-192
Cable Temp	75°C	75°C	75°C	75°C	75°C	75°C	75°C
24 AWG	2.0	1.4	1.0	0.7	0.6	0.5	0.4

The table above is derived from the one approved by the National Fire Protection Agency and used in the National Electrical Code, NFPA-70. The complete table can be found in sections 725.144 and 800 Communication Circuits of the code. The table identifies the ampacity of each conductor (in amperes) in a 4-pair Class 2 or Class 3 data cable. Ambient temperature used for development of the table is 30°C (86° F) with all conductors in all cables carrying current. The table is based on 60°C (140°F), 75°C (167°F) and 90°C (194°F) rated cables. All cable temps are operational temp ratings. Cables with temp ratings above 90c would deliver additional power handling capacity.

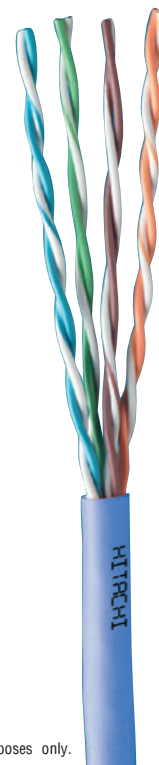


Photo is for representation purposes only.

Transmission Specifications

ANSI/TIA-568.2-D Category 5e Verified

ISO/IEC 11801, 2nd ed. Class D Compliant

	Ins. Loss		NEXT		PSNEXT		ACR		PSACR		ACRF		PSACRF		Return Loss	
Freq. (MHz)	Std.	Max.	Std.	Min.	Std.	Min.	Cal.	Min.	Cal.	Min.	Std.	Min.	Std.	Min.	Std.	Min.
1	2.0	2.0	65.3	65.3	62.3	62.3	63.3	63.3	60.3	60.3	63.8	63.8	60.8	60.8	20.0	20.0
4	4.1	4.1	56.3	56.3	53.3	53.3	52.2	52.2	49.2	49.2	51.8	51.8	48.8	48.8	23.0	23.0
8	5.8	5.8	51.8	51.8	48.8	48.8	46.0	46.0	43.0	43.0	45.7	45.7	42.7	42.7	24.5	24.5
10	6.5	6.5	50.3	50.3	47.3	47.3	43.8	43.8	40.8	40.8	43.8	43.8	40.8	40.8	25.0	25.0
16	8.2	8.2	47.2	47.2	44.2	44.2	39.0	39.0	36.0	36.0	39.7	39.7	36.7	36.7	25.0	25.0
31.25	11.7	11.7	42.9	42.9	39.9	39.9	31.2	31.2	28.2	28.2	33.9	33.9	30.9	30.9	23.6	23.6
62.5	17.0	17.0	38.4	38.4	35.4	35.4	21.4	21.4	18.4	18.4	27.9	27.9	24.9	24.9	21.5	21.5
100	22.0	22.0	35.3	35.3	32.3	32.3	13.3	13.3	10.3	10.3	23.8	23.8	20.8	20.8	20.1	20.1
155*	-	28.1	-	32.4	-	29.4	4.4	4.4	1.4	1.4	-	20.0	-	17.0	-	18.8
200*	-	32.4	-	30.8	-	27.8	-	-	-	-	-	17.8	-	14.8	-	18.0
250*	-	36.9	-	29.3	-	26.3	-	-	-	-	-	15.8	-	12.8	-	17.3
400*	-	48.5	-	26.3	-	23.3	-	-	-	-	-	11.8	-	8.8	-	15.9

*Frequencies beyond the TIA and ISO requirements are for information only.

All values are dB/100m.

Cat 5e Multi-Pair

HITACHI

Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- UL Verified.
- Low Smoke Plenum construction.
- Tested from 1 to 100 MHz.
- Power sum compliance ensures minimum signal corruption due to alien crosstalk.

Packaging

- 1,000 foot (305m) reels

Options

- Consult factory for 50-pair design construction and availability

Applications

- Including:
 - Gigabit Ethernet (IEEE 802.3ab)
 - 100 Mbps Ethernet (IEEE 802.3u)
 - 1000 Mbps ATM
 - 622 Mbps ATM
 - 15W PoE (IEEE 802.3af)
 - 30W PoE+ (IEEE 802.3at)
 - 60W PoE++ (IEEE 802.3bt Type 3)

Temp Range

- Storage Temperature
 - 40°C to +60°C (-40°F to +140°F)
- Installation Temperature
 - 0°C to +60°C (+32°F to +140°F)
- Operation Temperature
 - 20°C to +75°C (-4°F to +167°F)

Hitachi Cable America reserves the right to revise any specifications.

Category 5e Power Sum Multi-pair UTP (Plenum)

c(UL)us Listed Type CMP (UL 910), CSA Type FT6


HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30203-50	25	.454	11.531	141.0	64.0

Category 5e Power Sum Multi-pair UTP (Riser)


c(UL)us Listed Type CMR (UL 1666), CSA Type FT4

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30093-50	25	.49	12.4	133.25	60.44
30172-100	50	.49 x .99	12.45 x 25.15	267.0	121.11


Features

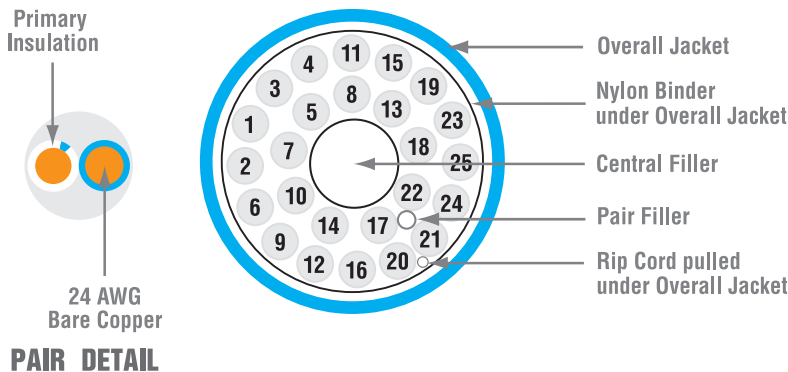

DIELECTRIC MATERIALS	RISER	PLENUM
Primary Insulation	Polyolefin	Plenum-rated fluoropolymer
Overall Jacket	Flame-retardant thermoplastic	Plenum-rated fluoropolymer
Central Filler	Flame-retardant thermoplastic	Plenum-rated polymer
Pair Filler	Flame-retardant thermoplastic	Plenum-rated polymer

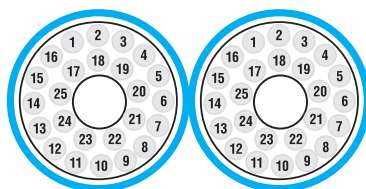

50-pair



25-pair

Diagram scale approx. 3:1

Electrical Characteristics

Input impedance	100 ± 15Ω (1.0 to 100 MHz)
Maximum resistance unbalance	5%
Maximum capacitance unbalance	330 pF/100 meters
Maximum delay skew	45 ns/100 meters
Nominal velocity of propagation (NVP)	68%, riser 70%, plenum
Voltage Rating	300 Volts



Transmission Specifications

ANSI/TIA-568.2-D Category 5e Verified

ISO/IEC 11801, 2nd ed. Class D Compliant

Freq. (MHz)	Ins. Loss		NEXT		PSNEXT		ACR		PSACR		ACRF		PSACRF		Return Loss	
	Std.	Max.	Std.	Min.	Std.	Min.	Cal.	Min.	Cal.	Min.	Std.	Min.	Std.	Min.	Std.	Min.
1	2.0	2.0	65.3	65.3	62.3	62.3	63.3	63.3	60.3	60.3	63.8	63.8	60.8	60.8	20.0	20.0
4	4.1	4.1	56.3	56.3	53.3	53.3	52.2	52.2	49.2	49.2	51.8	51.8	48.8	48.8	23.0	23.0
8	5.8	5.8	51.8	51.8	48.8	48.8	46.0	46.0	43.0	43.0	45.7	45.7	42.7	42.7	24.5	24.5
10	6.5	6.5	50.3	50.3	47.3	47.3	43.8	43.8	40.8	40.8	43.8	43.8	40.8	40.8	25.0	25.0
16	8.2	8.2	47.2	47.2	44.2	44.2	39.0	39.0	36.0	36.0	39.7	39.7	36.7	36.7	25.0	25.0
31.25	11.7	11.7	42.9	42.9	39.9	39.9	31.2	31.2	28.2	28.2	33.9	33.9	30.9	30.9	23.6	23.6
62.5	17.0	17.0	38.4	38.4	35.4	35.4	21.4	21.4	18.4	18.4	27.9	27.9	24.9	24.9	21.5	21.5
100	22.0	22.0	35.3	35.3	32.3	32.3	13.3	13.3	10.3	10.3	23.8	23.8	20.8	20.8	20.1	20.1

Cat 5e Outdoor

HITACHI Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant
- Made in USA.
- Suitable for direct burial, lashed aerial, duct and underground conduit applications.
- Cable core is filled with non-conductive, water-blocking gel.
- Rugged black polyolefin jacket.
- UV resistant jacket.

Packaging

- 1,000 foot (305m) reels
- Reverse sequential footage markings standard on a 1,000 packages.

Applications

- Including:
 - HDBase-T A & B (Cat 6)
 - 5 Gigabit Ethernet (IEEE 802.3bz) (Cat 6)
 - 2.5 Gigabit Ethernet (IEEE 802.3bz)
 - Gigabit Ethernet (IEEE 802.3ab)
 - 100 Mbps Ethernet (IEEE 802.3u)
 - 1000 Mbps ATM
 - 622 Mbps ATM
 - 15W PoE (IEEE 802.3af)
 - 30W PoE+ (IEEE 802.3at)
 - 60W PoE++ (IEEE 802.3bt Type 3)
 - 100W PoE++ (IEEE 802.3bt Type 4)

Temp Range

- Storage Temperature
 - 40°C to +70°C (-40°F to +158°F)
- Installation Temperature
 - 20°C to +70°C (-40°F to +158°F)
- Operation Temperature
 - 40°C to +70°C (-40°F to +158°F)

Category 5e UTP Outdoor

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	CABLE mm	WEIGHT lbs/1000ft	kg/305m
Category 5e					
30145-8-XXY	4	0.23	5.8	25.75	11.68

Building a Part Number

Base Part Number Ex.	No. of Conductors	Jacket Color	Reel Type
30145	8	XX	Y


Jacket Colors (XX):

Black(BK)

Reel Type (Y):

Reels(3)

Features

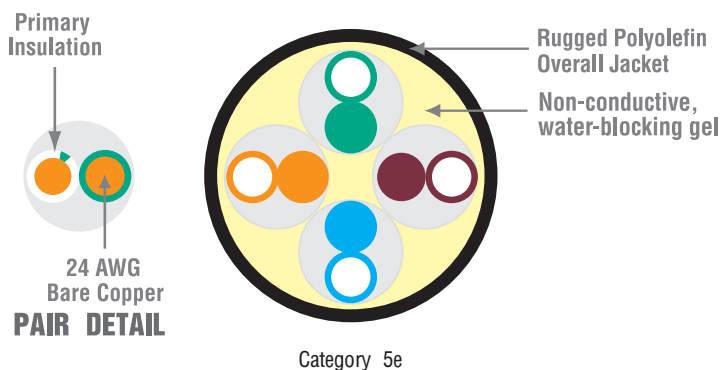

Hitachi Cable America reserves the right to revise any specifications.

Outdoor Cable

Special Applications

Copper

Electrical Characteristics

Input impedance	100 ± 15 Ω (1.0 to 100 MHz)
	100 ± 20 Ω (101 to 250 MHz)
Maximum resistance unbalance	5%
Voltage Rating	300 Volts
Maximum capacitance unbalance	330 pF/100 meters
Maximum delay skew	45 ns/100 meters
Nominal velocity of propagation (NVP)	63%

Cable Ampacity Chart							
Bundle Size	1	2-7	8-19	20-37	38-61	62-91	92-192
Cable Temp	60°C	60°C	60°C	60°C	60°C	60°C	60°C
24 AWG	2.0	1.0	0.8	0.6	0.5	0.4	0.3

The table above is derived from the one approved by the National Fire Protection Agency and used in the National Electrical Code, NFPA-70. The complete table can be found in sections 725.144 and 800 Communication Circuits of the code. The table identifies the ampacity of each conductor (in amperes) in a 4-pair Class 2 or Class 3 data cable. Ambient temperature used for development of the table is 30°C (86° F) with all conductors in all cables carrying current. The table is based on 60°C (140°F), 75°C (167°F) and 90°C (194°F) rated cables. All cable temps are operational temp ratings. Cables with temp ratings above 90c would deliver additional power handling capacity.



Transmission Specifications

ANSI/TIA-568.2-D Category 5e Compliant

ISO/IEC 11801, 2nd ed. Class D Compliant

	Ins. Loss		NEXT		PSNEXT		ACR		PSACR		ACRF		PSACRF		Return Loss	
Freq. (MHz)	Std.	Max.	Std.	Min.	Std.	Min.	Cal.	Min.	Cal.	Min.	Std.	Min.	Std.	Min.	Std.	Min.
1	2.0	2.0	65.3	65.3	62.3	62.3	63.3	63.3	60.3	60.3	63.8	63.8	60.8	60.8	20.0	20.0
4	4.1	4.1	56.3	56.3	53.3	53.3	52.2	52.2	49.2	49.2	51.8	51.8	48.8	48.8	23.0	23.0
8	5.8	5.8	51.8	51.8	48.8	48.8	46.0	46.0	43.0	43.0	45.7	45.7	42.7	42.7	24.5	24.5
10	6.5	6.5	50.3	50.3	47.3	47.3	43.8	43.8	40.8	40.8	43.8	43.8	40.8	40.8	25.0	25.0
16	8.2	8.2	47.2	47.2	44.2	44.2	39.0	39.0	36.0	36.0	39.7	39.7	36.7	36.7	25.0	25.0
31.25	11.7	11.7	42.9	42.9	39.9	39.9	31.2	31.2	28.2	28.2	33.9	33.9	30.9	30.9	23.6	23.6
62.5	17.0	17.0	38.4	38.4	35.4	35.4	21.4	21.4	18.4	18.4	27.9	27.9	24.9	24.9	21.5	21.5
100	22.0	22.0	35.3	35.3	32.3	32.3	13.3	13.3	10.3	10.3	23.8	23.8	20.8	20.8	20.1	20.1
155*	-	28.1	-	32.4	-	29.4	4.4	4.4	1.4	1.4	-	20.0	-	17.0	-	18.8
200*	-	32.4	-	30.8	-	27.8	-	-	-	-	-	17.8	-	14.8	-	18.0
250*	-	36.9	-	29.3	-	26.3	-	-	-	-	-	15.8	-	12.8	-	17.3
400*	-	48.5	-	26.3	-	23.3	-	-	-	-	-	11.8	-	8.8	-	15.9

*Frequencies beyond the TIA and ISO requirements are for information only.
All values are dB/100m.

Cat 3 Multi-Pair

HITACHI Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant
- Made in USA.
- Low Smoke Plenum construction.
- Tested from 1 to 16 MHz.

Packaging

- 1,000 foot (305m) reels

Options

- Available in 25-, 50-, 100-, 200- and 300-pair constructions
- Consult factory for design and availability of 400-pair constructions

Applications

- Including:
10 BASE-T
4/16 Mbps Token Ring
25.6 Mbps ATM

Temp Range

- Storage Temperature
-40°C to +60°C (-40°F to +140°F)
- Installation Temperature
0°C to +60°C (+32°F to +140°F)
- Operation Temperature
-20°C to +75°C (-4°F to +167°F)

Category 3 Power Sum Multi-pair UTP (Plenum)

c(UL)us Listed Type CMP (UL 910), CSA Type FT6

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
30134-50	25	.38	9.7	111.43	50.54
30134-100	50	.446 x .646	11.316 x 16.396	219.95	99.77
30134-200	100	.810	20.57	436.63	198.05
30134-400	200	1.151	29.235	874.94	396.87
30134-600	300	1.33	33.7	1275.83	578.71

Note: Standard/stock color for plenum cable is white.


Category 3 Power Sum Multi-pair UTP (Riser)

c(UL)us Listed Type CMR (UL 1666), CSA Type FT4

HITACHI PART NO.	NO. OF PAIRS	CALCULATED CABLE O.D. in.	mm	CABLE WEIGHT lbs/1000ft	kg/305m
39228-50	25	.371	9.423	104.95	47.60
39228-100	50	.420 x .641	10.669 x 16.280	202.43	91.82
39228-200	100	.743	18.872	402.01	182.34
39228-400	200	1.040	26.416	794.70	360.46
39228-600	300	1.310	33.274	1176.73	533.76

Note: Standard/stock color for riser cable is gray.

Features

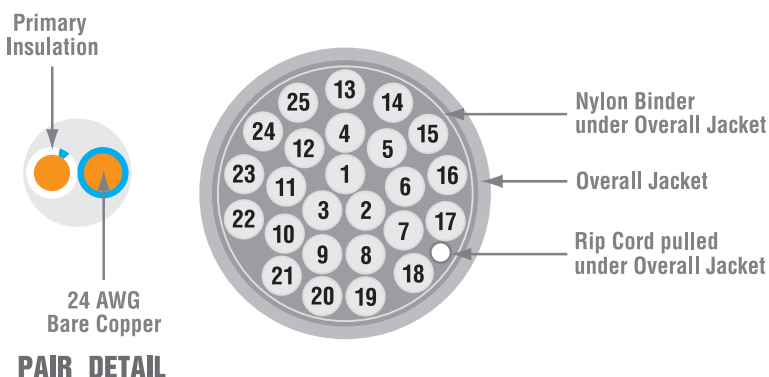

DIELECTRIC MATERIALS	RISER	PLENUM
Primary Insulation	PVC	Low-smoke, flame-retardant thermoplastic
Overall Jacket (< 100-pair)	Flame-retardant thermoplastic	Low-smoke, flame-retardant thermoplastic
Overall Jacket (≥ 100-pair)	Flame-retardant thermoplastic	PvDF

Hitachi Cable America reserves the right to revise any specifications.

Electrical Characteristics

Characteristic impedance	100 ± 15Ω (1.0 to 16 MHz)
Maximum resistance unbalance	5%
Maximum capacitance unbalance	330 pF/100 meters
Maximum delay skew	45 ns/100 meters
Voltage Rating	300 Volts

Transmission Specifications


ANSI/TIA-568.2-D Category 3 Compliant

FREQ. (MHz)	INS. LOSS	NEXT LOSS	ACR	STRUCTURAL RETURN LOSS
1	2.6	41.3	38.7	12.0
4	5.6	32.3	26.7	12.0
8	8.5	27.8	19.3	12.0
10	9.7	26.3	16.6	12.0
16	13.1	23.2	10.1	10.0


All values are dB/100m.




25-pair




50-pair



100-pair



200-pair



300-pair



Copper

Fiber Selection GUIDE

HITACHI
Inspire the Next



Fiber Selection Guide

How much fiber do you need?

- Fiber optic cables are frequently cut to length by the manufacturer or by an authorized distributor. This allows you to get exactly the length you need for each cable run. You can also order a reel equivalent in length to all your cable run lengths and cut your own cable segments.
- Even though extreme care may have been taken when measuring the distances between termination points, it is highly recommended to build in a safety buffer when ordering fiber optic cable. An additional 10% is typical.

How many strands of fiber do you need?

- Fiber optic cables typically come in multiples of 2 fiber increments and are commonly available in 6, 12, 24, 48, 72 and 144 fiber configurations.
- Design engineers allow for a number of spare fibers to accommodate possible fiber breaks and for future upgrades to the system. Migration from one Ethernet application to another, such as 1 gigabit to 10 gigabit, may require additional fibers. Accounting for future growth when pulling in the cables now is very cost effective.
- Non-standard fiber counts can be manufactured to specific minimum quantities. Lead times may apply, however. Sometimes using multiple cables to achieve the total fiber count, such as combining a 24-fiber and a 48-fiber cable rather than using a 72-fiber, results in quicker access to product and, depending on the cable pathways, an easier installation.

Determine the type of fiber (optical glass) you need.

- Fibers come in two primary categories: singlemode and multimode. Singlemode is typically used in high bandwidth/ long distance applications. Multimode, which can also be used for high bandwidth applications, is typically used in instances where cable runs do not exceed 550 meters. Multimode and singlemode utilize different electronics. Hitachi Cable's standard singlemode glass is the higher performing OS2.
- Multimode is available in different performance levels starting with low performing OM1 (62.5 micron core) and then increasing performance levels of 50 micron core designs including OM2, OM3, OM4. The designation OM is short for Optical Fiber Multimode. Likewise, OS for singlemode fiber stands for Optical Fiber Singlemode. See the Optical Specifications for each product for more information. Due to the different core size, OM1 fibers cannot be mated to OM2, OM3 or OM4 fibers.

Do you want loose tube or tight buffered fibers?

- Tight buffered refers to the type of cable in which the fiber strands have an additional layer of material applied to the fiber, similar to insulation around a copper conductor. This layer usually increases the size of the fiber strand from 250 micron to 900 micron. The 900 micron size is the standard size for terminating fibers on a job site.
- Loose tube refers to cable designs where the fibers are 250 micron in diameter. They are color-coded to differentiate one fiber from another. The small fiber diameter usually permits smaller cable diameters than tight buffered designs. Originally used in high-fiber outside plant cables, loose tube fibers are now used indoors or anywhere where cable pathway space is limited. Termination of loose tubes requires either a fan-out kit or the ability to splice connectors.

In what environment will the fiber optic cable be installed?

- Cables constructions are specific to an environment, such as indoor, outdoor or both indoor/outdoor environments.
- Many cables are also available in armored constructions for additional protection. Interlock armoring is typically used for indoor and indoor/outdoor cables while corrugated armoring is used for traditional outside plant cables.
- When installing cables indoor or indoor/outdoor, ensure the cables are labeled with the appropriate National Electrical Code (NEC) rating required for that location. Ratings such as OFNP (Optical Fiber Non-conductive Plenum) or OFNR (Optical Fiber Non-conductive Riser) are standard designs. Cables that are armored or contain metal must be identified with a C in the rating instead of an N. C stands for conductive.
- Outdoor cables do not require an NEC rating, but must be terminated within 50 feet of entering the building.

Need help choosing the right fiber optic cable?

- The Optical Specifications table below is an example of the kind of information provided in this catalog for every fiber optic cable. Though attenuation may vary slightly between different cable constructions, the guaranteed application support distance for gigabit (Gb) Ethernet and 10 Gb Ethernet are consistent throughout the catalog.
- If you are uncertain about any aspects of the cable selection process, contact an authorized Hitachi Cable America distributor or contact Hitachi Cable America directly at the Manchester, New Hampshire manufacturing facility.

Optical Specifications

TIA/EIA-568-C.3 | ISO/IEC 11801, 2nd edition | Telcordia GR-409-CORE

Fiber type	Max. Attenuation (dB/km)		Min OFL Bandwidth (MHz-km)		Min EMBc Bandwidth (MHz-km)		Gb Ethernet distance (m)		10 Gb Ethernet distance (m)	
	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)
OM1	3.5	1.0	200	500	220	N/A	300	550	33	N/A
OM2	3.0	1.0	700	500	950	N/A	750	550	150	N/A
OM3	3.0	1.0	1500	500	2000	N/A	1000	550	300	N/A
OM4	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
OM5*	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)
OS2	0.5	0.5	N/A	N/A	N/A	N/A	> 25,000	> 40,000	10,000 - 25,000	40,000

Hitachi Cable America reserves the right to revise any specifications.

*OM5 optical fiber tested by glass manufacturer and exceeds the requirements of all applicable industry standards.

Sample Optical Specification from Interconnect (Page 55)



HITACHI Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- Extending PoE and Limited Power SELV data transmission beyond 100 meters.
- Provides immunity from electro magnetic and radio frequency interference.
- Choice of separate power conductors eliminates concerns associated with heat generation and length derating calculations as required by TIA 568 and NEC.
- Plenum and outdoor rating permits use in a wide range of environments.
- Dry, super absorbent polymers (SAPs) eliminate water migration in cable interstices.
- Suitable for lashed aerial, duct underground conduit and indoor plenum applications.
- All multimode and singlemode cables (except OM1) utilize bend-insensitive optical fibers.
- Easy to strip and terminate.
- Lightweight, flexible aramid yarns throughout the design enhance strength.
- Each 900um buffered fiber resides in a 2mm subunit for easy termination to LC, SC connectors and more.

Options

- Available with 2, 6 or 12 strands of fiber.
- Available with 1 pair of 12, 14, 16, 18, 20 or 22 AWG stranded conductors.

Applications

- High noise areas and extended distance.
- Security CCTV Cameras.
- Wireless Access Points.
- Distributed Antenna Systems (DAS).
- Passive Optical Networks (PON).
- Ideal for all remote powered applications.

Standards

- NEC CL2P-OF rating, compliant with Class 2 SELV (Safety Extra Low Voltage).
- NFPA 262.
- ANSI/TIA 568-C.2.

Power+™ Composite (Indoor/Outdoor Plenum)

(UL) OFCP c(UL) OFCP FT6

22 AWG	FIBERS	CABLE OD (mm)	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM5	8.3 UM OS2
	2	5.8	62860-4	62861-4	62862-4	62863-4	62864-4	62859-4
	6	8.0	62860-8	62861-8	62862-8	62863-8	62864-8	62859-8
	12	10.2	62860-14	62861-14	62862-14	62863-14	62864-14	62859-14

20 AWG	FIBERS	CABLE OD (mm)	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM5	8.3 UM OS2
	2	6.2	62866-4	62867-4	62868-4	62869-4	62870-4	62865-4
	6	8.4	62866-8	62867-8	62868-8	62869-8	62870-8	62865-8
	12	10.5	62866-14	62867-14	62868-14	62869-14	62870-14	62865-14

18 AWG	FIBERS	CABLE OD (mm)	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM5	8.3 UM OS2
	2	6.8	62872-4	62873-4	62874-4	62875-4	62876-4	62871-4
	6	8.4	62872-8	62873-8	62874-8	62875-8	62876-8	62871-8
	12	10.2	62872-14	62873-14	62874-14	62875-14	62876-14	62871-14

16 AWG	FIBERS	CABLE OD (mm)	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM5	8.3 UM OS2
	2	7.1	62878-4	62879-4	62880-4	62881-4	62882-4	62877-4
	6	8.4	62878-8	62879-8	62880-8	62881-8	62882-8	62877-8
	12	10.5	62878-14	62879-14	62880-14	62881-14	62882-14	62877-14

14 AWG	FIBERS	CABLE OD (mm)	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM5	8.3 UM OS2
	2	7.4	62884-4	62885-4	62886-4	62887-4	62888-4	62883-4
	6	9.2	62884-8	62885-8	62886-8	62887-8	62888-8	62883-8
	12	10.8	62884-14	62885-14	62886-14	62887-14	62888-14	62883-14

12 AWG	FIBERS	CABLE OD (mm)	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM5	8.3 UM OS2
	2	7.7	62890-4	62891-4	62892-4	62893-4	62894-4	62889-4
	6	10.1	62890-8	62891-8	62892-8	62893-8	62894-8	62889-8
	12	11.3	62890-14	62891-14	62892-14	62893-14	62894-14	62889-14

SPECIFICATION BY FIBER COUNT

CONDUCTORS		# OF FIBERS	CABLE OD		RECOMMENDED MAXIMUM LOADS				CABLE WEIGHT	
					INSTALL		OPERATION			
#	AWG		in.	mm	lbf	N	lbf	N		
2	22	2	0.229	5.8	180	800	54	240	27.3	40.7
2	22	6	0.314	8.0	180	800	54	240	46.3	69.0
2	22	12	0.400	10.2	180	800	54	240	71.7	106.8
2	20	2	0.243	6.2	180	800	54	240	31.7	47.2
2	20	6	0.333	8.4	180	800	54	240	52.8	78.7
2	20	12	0.413	10.5	180	800	54	240	77.2	115.0
2	18	2	0.268	6.8	180	800	54	240	41.0	61.2
2	18	6	0.329	8.4	180	800	54	240	60.4	90.0
2	18	12	0.403	10.2	180	800	54	240	82.5	123.0
2	16	2	0.279	7.1	180	800	54	240	37.7	56.2
2	16	6	0.329	8.4	180	800	54	240	55.0	82.0
2	16	12	0.415	10.5	180	800	54	240	78.8	117.4
2	14	2	0.291	7.4	180	800	54	240	57.2	85.2
2	14	6	0.363	9.2	180	800	54	240	77.4	115.3
2	14	12	0.427	10.8	180	800	54	240	96.6	143.9
2	12	2	0.302	7.7	180	800	54	240	75.4	112.3
2	12	6	0.398	10.1	180	800	54	240	98.0	146.1
2	12	12	0.444	11.3	180	800	54	240	116.8	174.0

Multimode and Singlemode Composite

Power+™ Composite (Indoor/Outdoor Plenum)

(UL) OFCP c(UL) OFCP FT6

Optical Specifications

TIA/EIA-568-C.3 | ISO/IEC 11801, 2nd edition | Telcordia GR-409-CORE

Fiber type	Max. Attenuation (dB/km)		Min OFL Bandwidth (MHz-km)		Min EMBc Bandwidth (MHz-km)		Gb Ethernet distance (m)		10 Gb Ethernet distance (m)	
	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)
OM1	3.5	1.0	200	500	220	N/A	300	550	33	N/A
OM2	3.0	1.0	700	500	950	N/A	750	550	150	N/A
OM3	3.0	1.0	1500	500	2000	N/A	1000	550	300	N/A
OM4	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
OM5*	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
	1310nm (SM)		1550nm (SM)		1310nm (SM)		1550nm (SM)		1310nm (SM)	
	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)
OS2	0.5	0.5	N/A	N/A	N/A	N/A	> 25,000	> 40,000	10,000 - 25,000	40,000

Hitachi Cable America reserves the right to revise any specifications.

*OM5 optical fiber tested by glass manufacturer and exceeds the requirements of all applicable industry standards.


Cable Temperature Ranges

Storage: -40° to 70°C (-40° to 158°F)

Installation: 0° to 60°C (32° to 140°F)

Operating: 0° to 70°C (32° to 158°F)

Features

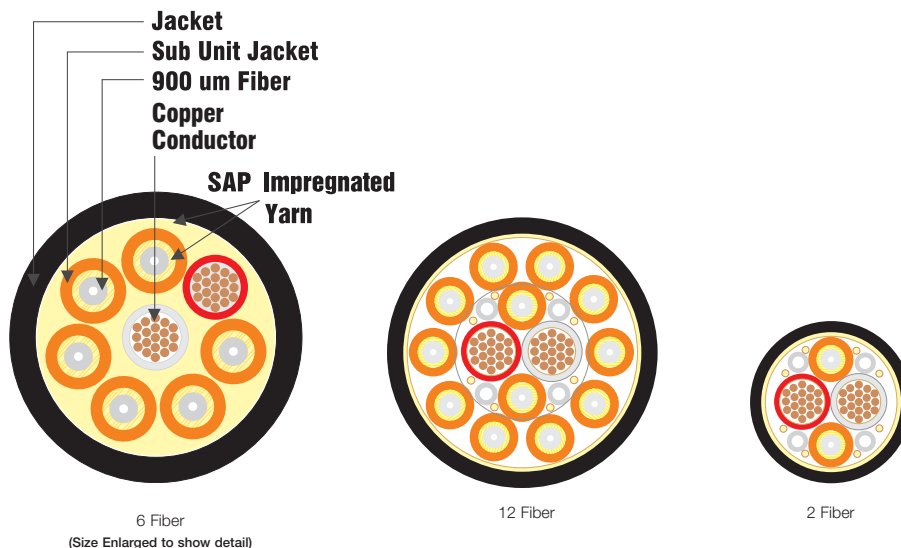

Hitachi Cable America reserves the right to revise any specifications.

INDOOR Interconnect

1-fiber, 2-fiber and zip

HITACHI

Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- All multimode, and singlemode cables (except OM1) utilize bend-insensitive optical fibers.
- 900 micron buffered design recommended for easy termination.
- Ideal for patch cords, interconnections, and short runs.
- Easy to strip and terminate.
- All multimode and singlemode cables (except OM1) utilize bend-insensitive optical fibers.
- Flexible and easy to handle.
- Lightweight, flexible Aramid yarns enhance strength.

Options

- Enhanced bend insensitive OS2 optical fiber is available (ITU-T G.657.B3 & G.657.A2).
- Standard jacket colors are:
Yellow: OS2
Orange: OM1 & OM2
Aqua: OM3 & OM4
Note: Erika Violet for OM4 is available.
- OM4+ optical fibers with extended 10 gigabit Ethernet distances are available.

Applications

- Applications include 10, 40 & 100 gigabit Ethernet, Fibre Channel, Video, Security, Automation.
- OM5 supports applications utilizing Short Wave Division Multiplexing (SWDM).

Standards

- TIA/EIA-568-C.3
- ISO/IEC 11801, 2nd edition
- Telcordia GR-409-CORE

Interconnect (Riser) (UL) OFNR c(UL) OFNR FT4

PART NUMBERS BY FIBER COUNT

FIBER COUNT	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM5	8.3 UM OS2
1	60001-1	60004-1	60464-1	61838-1	62720-1	60040-1
1	60037-1	60003-1	60465-1	61791-1	62721-1	60039-1
1	60038-1	60002-1	60466-1	61792-1	62722-1	60010-1
1	60425-1	60462-1	60467-1	61793-1	62723-1	60489-1
2	60001-2	60004-2	60464-2	61838-2	62720-2	60040-2
2	60514-2	60063-2	60463-2	61842-2	62724-2	60012-2
zip	60288-2	60376-2	61483-2	61988-2	62725-2	60289-2
zip	60005-2	60007-2	60501-2	61844-2	62726-2	60011-2

SPECIFICATIONS BY FIBER COUNT

			RECOMMENDED MAXIMUM LOADS					
FIBERS	CABLE O.D.		INSTALL		OPERATION		CABLE WEIGHT	
	in.	mm	lbs-f	N	lbs-f	N	lbs/1000 ft	kg/1000m
1	0.114	2.9	96	427	29	128	4.9	7.3
1	0.094	2.4	64	285	19	85	3.6	5.4
1	0.079	2.0	50	223	15	67	3.2	4.8
1	0.063	1.6	50	223	15	67	1.8	2.7
2	0.114	2.9	96	427	29	128	4.3	6.4
2	0.190	4.8	128	569	38	171	11.5	17.1
zip	.079 x .170	2.0 x 4.3	96	427	29	128	5.7	8.5
zip	.110 x .229	2.8 x 5.8	128	569	38	171	10.2	15.2

Cable Characteristics

Note: Part number rows in upper table directly correspond to cable characteristic rows in the same location of the lower table.

Multimode and Singlemode Interconnect

Interconnect (Riser) (UL) OFNR c(UL) OFNR FT4

Optical Specifications

TIA/EIA-568-C.3 | ISO/IEC 11801, 2nd edition | Telcordia GR-409-CORE

Fiber type	Max. Attenuation (dB/km)		Min OFL Bandwidth (MHz-km)		Min EMBc Bandwidth (MHz-km)		Gb Ethernet distance (m)		10 Gb Ethernet distance (m)	
	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)
OM1	3.5	1.0	200	500	220	N/A	300	550	33	N/A
OM2	3.0	1.0	700	500	950	N/A	750	550	150	N/A
OM3	3.0	1.0	1500	500	2000	N/A	1000	550	300	N/A
OM4	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
OM5*	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
	1310nm (SM)		1550nm (SM)		1310nm (SM)		1550nm (SM)		1310nm (SM)	
	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)
OS2	0.5	0.5	N/A	N/A	N/A	N/A	> 25,000	> 40,000	10,000 - 25,000	40,000

Hitachi Cable America reserves the right to revise any specifications.

*OM5 optical fiber tested by glass manufacturer and exceeds the requirements of all applicable industry standards.

Cable Temperature Ranges

Storage: -40° to 70°C (-40° to 158°F)
 Installation: -10° to 60°C (14° to 140°F)
 Operating: -20° to 70°C (-4° to 158°F)

Features

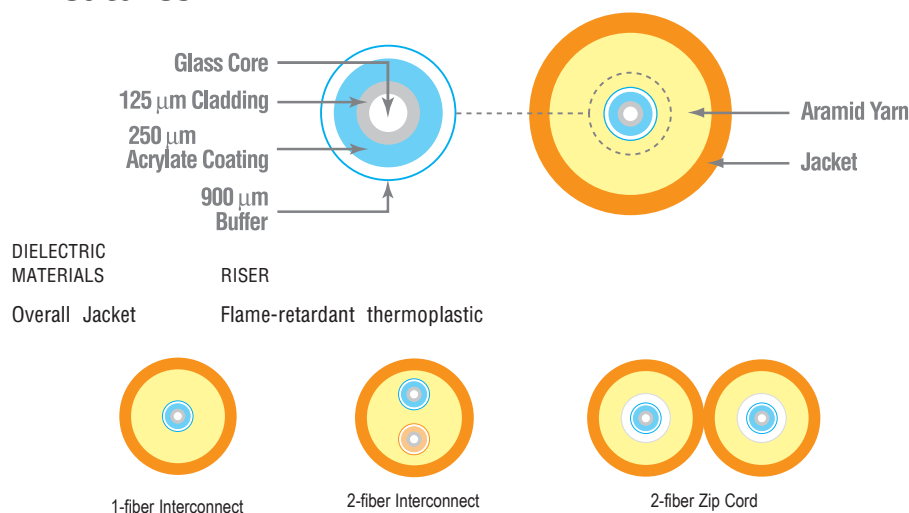


Diagram scale approx. 5:1

Mechanical Specifications

- Bend radius, no load
= 10x cable overall diameter
- Bend radius, load
= 15x cable overall diameter

plus
CORNING®
ClearCurve® Optical Fiber

FIBER



INDOOR Interconnect 1-fiber, 2-fiber and zip

HITACHI Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- 900 micron buffered design recommended for easy termination.
- LSZH with OFNR rating enables use in riser-rated environments.
- Halogen free design offers improved safety performance.
- All multimode, and singlemode cables (except OM1) utilize bend-insensitive optical fibers.
- Ideal for patch cords, interconnections, and short runs.
- Easy to strip and terminate.
- Lightweight, flexible aramid yarns enhance strength.
- LSZH rating established via HCA material testing to IEC 60332-3-24, IEC 60754-1 & 2 and IEC 61034-2.

Options

- Enhanced bend insensitive OS2 optical fiber is available (ITU-T G.657.B3 & G.657.A2).
- Standard jacket colors are:
Yellow: OS2
Orange: OM1 & OM2
Aqua: OM3 & OM4

Note: Erika Violet for OM4 is available

- OM4+ optical fibers with extended 10 gigabit Ethernet distances are available.

Applications

- Applications include 10, 40 & 100 gigabit Ethernet, Fibre Channel, Video, Security, Automation.
- OM5 supports applications utilizing Short Wave Division Multiplexing (SWDM).

Standards

- TIA/EIA-568-C.3
- ISO/IEC 11801, 2nd edition
- Telcordia GR-409-CORE

Interconnect (LSZH/Riser) Low Smoke Zero Halogen (UL) OFNR c(UL) OFNR FT4

PART NUMBERS BY FIBER COUNT

FIBERS	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM5	8.3 UM OS2
1	62124-1	62125-1	62126-1	62127-1	62727-1	62029-1
1	62129-1	62130-1	62131-1	62132-1	62728-1	62133-1
1	62135-1	62136-1	62137-1	62138-1	62729-1	62139-1
1	62141-1	62142-1	62143-1	62144-1	62730-1	62145-1
2	62124-2	62125-2	62126-2	62127-2	62727-2	62029-2
2	62147-2	62148-2	62149-2	62150-2	62731-2	62151-2
zip	62957-2	62958-2	62959-2	62960-2	62962-2	62963-2
zip	62275-2	61769-2	62276-2	62277-2	62732-2	62274-2
zip	62153-2	62154-2	62155-2	62156-2	62733-2	62157-2

SPECIFICATIONS BY FIBER COUNT

			RECOMMENDED MAXIMUM LOADS					
FIBERS	CABLE	O.D.	INSTALL		OPERATION		CABLE WEIGHT	
	in.	mm	lbs-f	N	lbs-f	N	lbs/1000 ft	kg/1000m
1	0.114	2.9	96	427	29	128	4.9	7.3
1	0.094	2.4	64	285	19	85	4.1	6.1
1	0.079	2.0	50	223	15	67	3.5	5.2
1	0.063	1.6	50	223	15	67	1.85	2.8
2	0.114	2.9	96	427	29	128	5.35	8.0
2	0.19	4.8	128	569	38	171	12.9	19.2
zip	.063 x .138	1.6 x 3.5	50	223	15	67	2.67	4.0
zip	.079 x .170	2.0 x 4.3	96	427	48	213	6.2	9.2
zip	.113 x .240	2.9 x 6.1	128	569	64	284	11.5	17.1

Cable Characteristics

Note: Part number rows in upper table directly correspond to cable characteristic rows in the same location of the lower table.

Multimode and Singlemode Interconnect

Interconnect (LSZH/Riser) Low Smoke Zero Halogen (UL) OFNR c(UL) OFNR FT4

Optical Specifications

TIA/EIA-568-C.3 | ISO/IEC 11801, 2nd edition | Telcordia GR-409-CORE

Fiber type	Max. Attenuation (dB/km)		Min OFL Bandwidth (MHz-km)		Min EMBc Bandwidth (MHz-km)		Gb Ethernet distance (m)		10 Gb Ethernet distance (m)	
	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)
OM1	3.5	1.0	200	500	220	N/A	300	550	33	N/A
OM2	3.0	1.0	700	500	950	N/A	750	550	150	N/A
OM3	3.0	1.0	1500	500	2000	N/A	1000	550	300	N/A
OM4	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
OM5*	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
	1310nm (SM)		1550nm (SM)		1310nm (SM)		1550nm (SM)		1310nm (SM)	
	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)
OS2	0.5	0.5	N/A	N/A	N/A	N/A	> 25,000	> 40,000	10,000 - 25,000	40,000

Hitachi Cable America reserves the right to revise any specifications.

*OM5 optical fiber tested by glass manufacturer and exceeds the requirements of all applicable industry standards.

Cable Temperature Ranges

Storage: -40° to 70°C (-40° to 158°F)
Installation: -10° to 60°C (14° to 140°F)
Operating: -20° to 70°C (-4° to 158°F)

Features

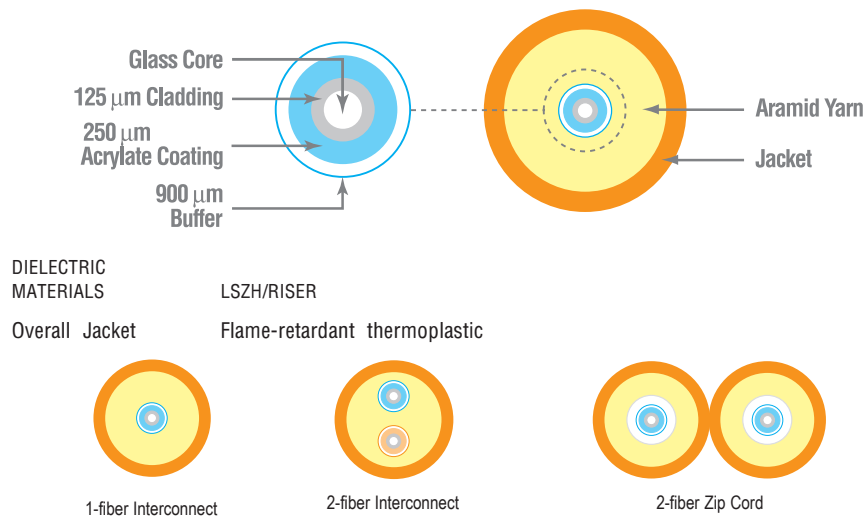


Diagram scale approx. 5:1

Mechanical Specifications

- Bend radius, no load
= 10x cable overall diameter
- Bend radius, load
= 15x cable overall diameter

plus
CORNING®
ClearCurve® Optical Fiber

FIBER



INDOOR Interconnect

1-fiber, 2-fiber and zip

HITACHI

Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- 900 micron buffered design recommended for easy termination.
- All multimode, and singlemode cables (except OM1) utilize bend-insensitive optical fibers.
- Ideal for patch cords, interconnections, and short runs.
- Easy to strip and terminate.
- Lightweight, flexible aramid yarns enhance strength.
- Extremely flexible for easy handling.

Options

- Enhanced bend insensitive OS2 optical fiber is available (ITU-T G.657.B3 & G.657.A2).
- Standard jacket colors are:
Yellow: OS2
Orange: OM1 & OM2
Aqua: OM3 & OM4
Note: Violet for OM4 is available
- OM4+ optical fibers with extended 10 gigabit Ethernet distances are available.

Applications

- Applications include 10, 40 & 100 gigabit Ethernet, Fibre Channel, Video, Security, Automation.
- OM5 supports applications utilizing Short Wave Division Multiplexing (SWDM).

Standards

- TIA/EIA-568-C.3
- ISO/IEC 11801, 2nd edition
- Telcordia GR-409-CORE

Interconnect (Plenum) (UL) OFNP c(UL) OFNP FT6

PART NUMBERS BY FIBER COUNT

FIBERS	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM5	8.3 UM OS2
1	60042-1	60022-1	60472-1	61851-1	62734-1	60044-1
1	60430-1	60468-1	60473-1	61852-1	62735-1	60490-1
1	60431-1	60469-1	60474-1	61853-1	62736-1	60491-1
1	60432-1	60470-1	60475-1	61854-1	62737-1	60492-1
2	60042-2	60022-2	60472-2	61851-2	62734-2	60044-2
2	60024-2	60026-2	60471-2	61855-2	62738-2	60031-2
zip	62956-2	60316-2	62950-2	62951-2	62953-2	62954-2
zip	61379-2	61444-2	61457-2	61986-2	62739-2	61378-2
zip	60023-2	60008-2	60502-2	61857-2	62740-2	60030-2

SPECIFICATIONS BY FIBER COUNT

FIBERS			RECOMMENDED MAXIMUM LOADS					
	CABLE O.D.		INSTALL		OPERATION		CABLE WEIGHT	
	in.	mm	lbs-f	N	lbs-f	N	lbs/1000 ft	kg/1000m
1	0.114	2.9	96	427	29	128	5.6	8.3
1	0.094	2.4	64	285	19	85	4.7	6.9
1	0.079	2.0	50	223	15	67	3.6	5.3
1	0.063	1.6	50	223	15	67	2.0	2.9
2	0.114	2.9	96	427	29	128	6.4	9.5
2	0.190	4.8	128	569	38	171	13.1	19.4
zip	.063 x .038	1.6 x 3.5	50	223	15	67	2.67	3.97
zip	.079 x .170	2.0 x 4.3	96	427	48	213	6.27	9.3
zip	.113 x .235	2.9 x 6.0	128	569	64	284	13.2	19.6

Cable Characteristics

Note: Part number rows in upper table directly correspond to cable characteristic rows in the same location of the lower table.

Interconnect (Plenum) (UL) OFNP c(UL) OFNP FT6

Optical Specifications

TIA/EIA-568-C.3 | ISO/IEC 11801, 2nd edition | Telcordia GR-409-CORE

Fiber type	Max. Attenuation (dB/km)		Min OFL Bandwidth (MHz-km)		Min EMBC Bandwidth (MHz-km)		Gb Ethernet distance (m)		10 Gb Ethernet distance (m)	
	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)
OM1	3.5	1.0	200	500	220	N/A	300	550	33	N/A
OM2	3.0	1.0	700	500	950	N/A	750	550	150	N/A
OM3	3.0	1.0	1500	500	2000	N/A	1000	550	300	N/A
OM4	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
OM5*	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
	1310nm (SM)		1550nm (SM)		1310nm (SM)		1550nm (SM)		1310nm (SM)	
	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)
OS2	0.5	0.5	N/A	N/A	N/A	N/A	> 25,000	> 40,000	10,000 - 25,000	40,000

Hitachi Cable America reserves the right to revise any specifications.

*OM5 optical fiber tested by glass manufacturer and exceeds the requirements of all applicable industry standards.


Cable Temperature Ranges

Storage: -40° to 70°C (-40° to 158°F)

Installation: 0° to 60°C (32° to 140°F)

Operating: 0° to 70°C (32° to 158°F)

Features

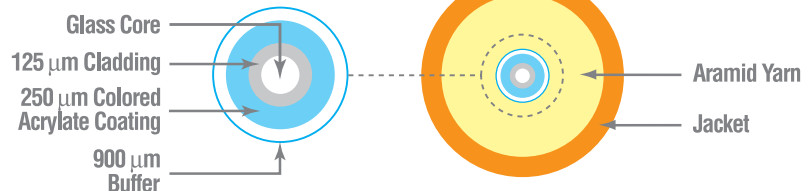

DIELECTRIC MATERIALS

PLENUM

Overall Jacket


Flame-retardant thermoplastic



1-fiber Interconnect



2-fiber Interconnect



2-fiber Zip Cord

Diagram scale approx. 5:1

Mechanical Specifications

- Bend radius, no load
= 10x cable overall diameter
- Bend radius, load
= 15x cable overall diameter

plus
CORNING®
ClearCurve® Optical Fiber

FIBER



Single-Unit 2 through 24 fibers

HITACHI

Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- 900 micron buffered design recommended for easy termination.
- All multimode, and singlemode cables (except OM1) utilize bend-insensitive optical fibers.
- Each fiber is color coded for easy identification.
- Ideal intra-building cable solution.
- Flexible and easy to handle.
- Lightweight, flexible aramid yarns enhance strength.

Options

- Enhanced bend insensitive OS2 optical fiber is available (ITU-T G.657.B3 & G.657.A2).
- Standard jacket colors are:
Yellow: OS2
Orange: OM1 & OM2
Aqua: OM3 & OM4
Note: Violet for OM4 is available
- OM4+ optical fibers with extended 10 gigabit Ethernet distances are available.

Applications

- Applications include 10, 40 & 100 gigabit Ethernet, Fibre Channel, Video, Security, Automation.
- OM5 supports applications utilizing Short Wave Division Multiplexing (SWDM).

Standards

- TIA/EIA-568-C.3
- ISO/IEC 11801, 2nd edition
- Telcordia GR-409-CORE

Single-Unit (Riser) (UL) OFNR c(UL) OFNR FT4

PART NUMBERS BY FIBER COUNT

FIBERS	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM5	8.3 UM OS2
2	60514-2	60063-2	60463-2	61842-2	62724-2	60012-2
4	60515-4	60516-4	60520-4	61865-4	62741-4	60014-4
6	60515-6	60516-6	60520-6	61865-6	62741-6	60014-6
8	60515-8	60516-8	60520-8	61865-8	62741-8	60014-8
10	60515-10	60516-10	60520-10	61865-10	62741-10	60014-10
12	60515-12	60516-12	60520-12	61865-12	62741-12	60014-12
24	60515-24	60516-24	60520-24	61865-24	62741-24	60014-24

SPECIFICATIONS BY FIBER COUNT

			RECOMMENDED MAXIMUM LOADS					
FIBERS	CABLE O.D.		INSTALL		OPERATION		CABLE WEIGHT	
	in.	mm	lbs-f	N	lbs-f	N	lbs/1000 ft	kg/1000m
2	.190	4.8	128	569	38	171	11.5	17.1
4	.190	4.8	128	569	38	171	13.0	19.4
6	.190	4.8	128	569	38	171	14.5	21.6
8	.230	5.8	160	712	48	214	18.5	27.6
10	.230	5.8	160	712	48	214	20.0	29.8
12	.230	5.8	160	712	48	214	21.5	32.0
24	.330	8.4	288	1282	86	385	50.3	74.9

Cable Characteristics

Note: Part number rows in upper table directly correspond to cable characteristic rows in the same location of the lower table.

Multimode and Singlemode Single-Unit

Single-Unit (Riser) (UL) OFNR c(UL) OFNR FT4

Optical Specifications

TIA/EIA-568-C.3 | ISO/IEC 11801, 2nd edition | Telcordia GR-409-CORE

Fiber type	Max. Attenuation (dB/km)		Min OFL Bandwidth (MHz-km)		Min EMBc Bandwidth (MHz-km)		Gb Ethernet distance (m)		10 Gb Ethernet distance (m)	
	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)
OM1	3.5	1.0	200	500	220	N/A	300	550	33	N/A
OM2	3.0	1.0	700	500	950	N/A	750	550	150	N/A
OM3	3.0	1.0	1500	500	2000	N/A	1000	550	300	N/A
OM4	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
OM5*	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
	1310nm (SM)		1550nm (SM)		1310nm (SM)		1550nm (SM)		1310nm (SM)	
	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)
OS2	0.5	0.5	N/A	N/A	N/A	N/A	> 25,000	> 40,000	10,000 - 25,000	40,000


Hitachi Cable America reserves the right to revise any specifications.

*OM5 optical fiber tested by glass manufacturer and exceeds the requirements of all applicable industry standards.

Cable Temperature Ranges

Storage: -40° to 70°C (-40° to 158°F)
 Installation: -10° to 60°C (14° to 140°F)
 Operating: -20° to 70°C (-4° to 158°F)

Features

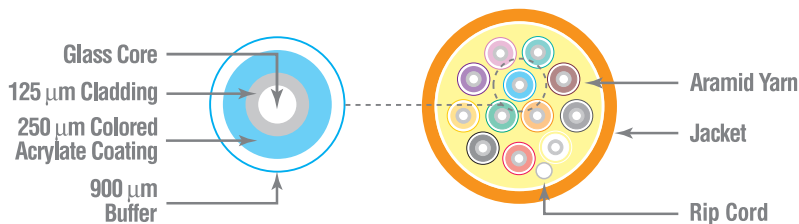

DIELECTRIC MATERIALS

RISER

Overall Jacket

Flame-retardant thermoplastic



2-fiber



4-fiber



6-fiber



8-fiber



10-fiber



12-fiber

Diagram scale approx. 2:1

Mechanical Specifications

- Bend radius, no load
= 10x cable overall diameter
- Bend radius, load
= 15x cable overall diameter

plus
CORNING®
 ClearCurve® Optical Fiber

FIBER



Single-Unit 2 through 24 fibers

HITACHI

Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- 900 micron buffered design recommended for easy termination.
- All multimode, and singlemode cables (except OM1) utilize bend-insensitive optical fibers.
- Each fiber is color coded for easy identification.
- Ideal intra-building cable solution.
- Flexible and easy to handle.
- Lightweight, flexible aramid yarns enhance strength.

Options

- Enhanced bend insensitive OS2 optical fiber is available (ITU-T G.657.B3 & G.657.A2).
- Standard jacket colors are:
Yellow: OS2
Orange: OM1 & OM2
Aqua: OM3 & OM4
Note: Violet for OM4 is available
- OM4+ optical fibers with extended 10 gigabit Ethernet distances are available.

Applications

- Applications include 10, 40 & 100 gigabit Ethernet, Fibre Channel, Video, Security, Automation.
- OM5 supports applications utilizing Short Wave Division Multiplexing (SWDM).

Standards

- TIA/EIA-568-C.3
- ISO/IEC 11801, 2nd edition
- Telcordia GR-409-CORE

Single-Unit (Plenum) (UL) OFNP c(UL) OFNP FT6

PART NUMBERS BY FIBER COUNT

FIBERS	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM5	8.3 UM OS2
2	60024-2	60026-2	60471-2	61855-2	62738-2	60031-2
4	60517-4	60518-4	60522-4	61868-4	62742-4	60029-4
6	60517-6	60518-6	60522-6	61868-6	62742-6	60029-6
8	60517-8	60518-8	60522-8	61868-8	62742-8	60029-8
10	60517-10	60518-10	60522-10	61868-10	62742-10	60029-10
12	60517-12	60518-12	60522-12	61868-12	62742-12	60029-12
24	60517-24	60518-24	60522-24	61868-24	62742-24	60029-24

SPECIFICATIONS BY FIBER COUNT

			RECOMMENDED MAXIMUM LOADS					
FIBERS	CABLE O.D.		INSTALL		OPERATION		CABLE WEIGHT	
	in.	mm	lbs-f	N	lbs-f	N	lbs/1000 ft	kg/1000m
2	.190	4.8	128	569	38	171	13.3	19.8
4	.190	4.8	128	569	38	171	14.5	21.6
6	.190	4.8	128	569	38	171	15.7	23.4
8	.230	5.8	160	712	48	214	20.9	31.1
10	.230	5.8	160	712	48	214	21.7	32.3
12	.230	5.8	160	712	48	214	23.0	34.3
24	.330	8.4	288	1282	86	385	50.3	74.9

Cable Characteristics

Note: Part number rows in upper table directly correspond to cable characteristic rows in the same location of the lower table.

Multimode and Singlemode **Single-Unit**

Single-Unit (Plenum) (UL) OFNP c(UL) OFNP FT6

Optical Specifications

TIA/EIA-568-C.3 | ISO/IEC 11801, 2nd edition | Telcordia GR-409-CORE

Fiber type	Max. Attenuation (dB/km)		Min OFL Bandwidth (MHz-km)		Min EMBc Bandwidth (MHz-km)		Gb Ethernet distance (m)		10 Gb Ethernet distance (m)	
	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)
OM1	3.5	1.0	200	500	220	N/A	300	550	33	N/A
OM2	3.0	1.0	700	500	950	N/A	750	550	150	N/A
OM3	3.0	1.0	1500	500	2000	N/A	1000	550	300	N/A
OM4	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
OM5*	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
	1310nm (SM)		1550nm (SM)		1310nm (SM)		1550nm (SM)		1310nm (SM)	
	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)
OS2	0.5	0.5	N/A	N/A	N/A	N/A	> 25,000	> 40,000	10,000 - 25,000	40,000


Hitachi Cable America reserves the right to revise any specifications.

*OM5 optical fiber tested by glass manufacturer and exceeds the requirements of all applicable industry standards.

Cable Temperature Ranges

Storage: -40° to 70°C (-40° to 158°F)
 Installation: 0° to 60°C (32° to 140°F)
 Operating: 0° to 70°C (32° to 158°F)

Features

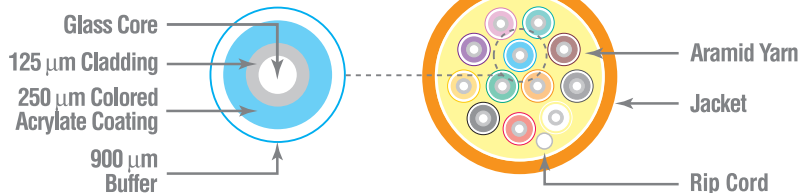

DIELECTRIC MATERIALS

PLENUM

Overall Jacket

Flame-retardant thermoplastic



2-fiber



4-fiber



6-fiber



8-fiber



10-fiber



12-fiber

Diagram scale approx. 2:1

Mechanical Specifications

- Bend radius, no load
= 10x cable overall diameter
- Bend radius, load
= 15x cable overall diameter

plus
CORNING®
ClearCurve® Optical Fiber

FIBER



Multi-Unit

12 through 72 fibers

HITACHI

Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- 900 micron buffered design recommended for easy termination.
- All multimode, and singlemode cables (except OM1) utilize bend-insensitive optical fibers.
- Each fiber is color coded for easy identification.
- Compact distribution design.
- Ideal intra-building, multi-floor cable solution.
- Lightweight, flexible aramid yarns enhance strength.

Options

- Enhanced bend insensitive OS2 optical fiber is available (ITU-T G.657.B3 & G.657.A2).
- Standard jacket colors are:
Yellow: OS2
Orange: OM1 & OM2
Aqua: OM3 & OM4
Note: Violet for OM4 is available
- OM4+ optical fibers with extended 10 gigabit Ethernet distances are available.

Applications

- Applications include 10, 40 & 100 gigabit Ethernet, Fibre Channel, Video, Security, Automation.
- OM5 supports applications utilizing Short Wave Division Multiplexing (SWDM).

Standards

- TIA/EIA-568-C.3
- ISO/IEC 11801, 2nd edition
- Telcordia GR-409-CORE

Multi-Unit (Riser) (UL) OFNR c(UL) OFNR FT4

PART NUMBERS BY FIBER COUNT

FIBERS	FIBERS/TUBE	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM5	8.3 UM OS2
18	6	60567-18	60595-18	60581-18	61872-18	62743-18	60633-18
24	6	60567-24	60595-24	60581-24	61872-24	62743-24	60633-24
36	6	60567-36	60595-36	60581-36	61872-36	62743-36	60633-36
48	6	60567-48	60595-48	60581-48	61872-48	62743-48	60633-48
72	6	60567-72	60595-72	60581-72	61872-72	62743-72	60633-72
36	12	60006-36	60009-36	60613-36	61874-36	62744-36	60015-36
48	12	60006-48	60009-48	60613-48	61874-48	62744-48	60015-48
60	12	60006-60	60009-60	60613-60	61874-60	62744-60	60015-60
72	12	60006-72	60009-72	60613-72	61874-72	62744-72	60015-72

SPECIFICATIONS BY FIBER COUNT

FIBERS	FIBERS/TUBE	TUBE LAYOUT	RECOMMENDED MAXIMUM LOADS							
			CABLE O.D.		INSTALL		OPERATION		CABLE WEIGHT	
			in.	mm	lbs-f	N	lbs-f	N	lbs/1000 ft	kg/1000m
18	6	3xC5M	.499	12.6	384	1709	115	513	75.0	111.8
24	6	4xC5M	.538	13.6	512	2279	154	684	93.0	138.6
36	6	6xC5M	.650	16.5	768	3418	230	1025	143.0	213.1
48	6	8xC5M	.792	20.1	1024	4557	307	1367	222.0	330.8
72	6	9x3xC5M	.903	22.9	1536	6837	461	2051	241.0	359.1
36	12	3xC5M	.579	14.7	480	2136	144	641	106.0	157.9
48	12	4xC5M	.634	16.1	640	2848	192	854	134.0	199.7
60	12	5xC5M	.701	17.8	800	3561	240	1068	169.0	251.8
72	12	6xC5M	.770	19.5	960	4272	288	1282	208.0	309.9

Cable Characteristics

Note: Part number rows in upper table directly correspond to cable characteristic rows in the same location of the lower table.

Multi-Unit

Multimode and Singlemode

Multi-Unit (Riser) (UL) OFNR c(UL) OFNR FT4

Optical Specifications

TIA/EIA-568-C.3 | ISO/IEC 11801, 2nd edition | Telcordia GR-409-CORE

Fiber type	Max. Attenuation (dB/km)		Min OFL Bandwidth (MHz-km)		Min EMBc Bandwidth (MHz-km)		Gb Ethernet distance (m)		10 Gb Ethernet distance (m)	
	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)
OM1	3.5	1.0	200	500	220	N/A	300	550	33	N/A
OM2	3.0	1.0	700	500	950	N/A	750	550	150	N/A
OM3	3.0	1.0	1500	500	2000	N/A	1000	550	300	N/A
OM4	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
OM5*	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
	1310nm (SM)		1550nm (SM)		1310nm (SM)		1550nm (SM)		1310nm (SM)	
	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)
OS2	0.5	0.5	N/A	N/A	N/A	N/A	> 25,000	> 40,000	10,000 - 25,000	40,000

Hitachi Cable America reserves the right to revise any specifications.

*OM5 optical fiber tested by glass manufacturer and exceeds the requirements of all applicable industry standards.


Cable Temperature Ranges

Storage: -40° to 70°C (-40° to 158°F)

Installation: -10° to 60°C (14° to 140°F)

Operating: -20° to 70°C (-4° to 158°F)

Features

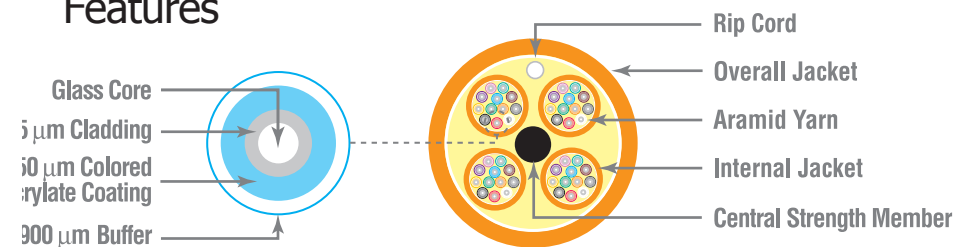


DIELECTRIC MATERIALS

RISER

Overall Jacket


Flame-retardant thermoplastic



48-fibers
(8 tubes of 6-fibers)



48-fibers
(4 tubes of 12-fibers)



48-fibers
(12 tubes of 4-fibers)

Diagram scale approx. 1:1

Mechanical Specifications

- Bend radius, no load
= 10x cable overall diameter
- Bend radius, load
= 15x cable overall diameter

plus
CORNING®
ClearCurve® Optical Fiber

FIBER



Multi-Unit

12 through 72 fibers

HITACHI

Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- 900 micron buffered design recommended for easy termination.
- All multimode, and singlemode cables (except OM1) utilize bend-insensitive optical fibers.
- Each fiber is color coded for easy identification.
- Compact distribution design.
- Ideal intra-building, multi-floor cable solution.
- Lightweight, flexible aramid yarns enhance strength.

Options

- Enhanced bend insensitive OS2 optical fiber is available (ITU-T G.657.B3 & G.657.A2).
- Standard jacket colors are:
Yellow: OS2
Orange: OM1 & OM2
Aqua: OM3 & OM4
Note: Violet for OM4 is available
- OM4+ optical fibers with extended 10 gigabit Ethernet distances are available.

Applications

- Applications include 10, 40 & 100 gigabit Ethernet, Fibre Channel, Video, Security, Automation.
- OM5 supports applications utilizing Short Wave Division Multiplexing (SWDM).

Standards

- TIA/EIA-568-C.3
- ISO/IEC 11801, 2nd edition
- Telcordia GR-409-CORE

Multi-Unit (Plenum) (UL) OFNP c(UL) OFNP FT6

PART NUMBERS BY FIBER COUNT

FIBERS	FIBERS/TUBE	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM5	8.3 UM OS2
18	6	60258-18	60596-18	60598-18	61877-18	62745-18	60634-18
24	6	60258-24	60596-24	60598-24	61877-24	62745-24	60634-24
36	6	60258-36	60596-36	60598-36	61877-36	62745-36	60634-36
48	6	60258-48	60596-48	60598-48	61877-48	62745-48	60634-48
72	6	60258-72	60596-72	60598-72	61877-72	62745-72	60634-72
36	12	60027-36	60028-36	60614-36	61879-36	62746-36	60033-36
48	12	60027-48	60028-48	60614-48	61879-48	62746-48	60033-48
60	12	60027-60	60028-60	60614-60	61879-60	62746-60	60033-60
72	12	60027-72	60028-72	60614-72	61879-72	62746-72	60033-72

SPECIFICATIONS BY FIBER COUNT

					RECOMMENDED MAXIMUM LOADS					
FIBERS	FIBERS/ TUBE	TUBE LAYOUT	CABLE O.D.		INSTALL		OPERATION		CABLE WEIGHT	
			in.	mm	lbs-f	N	lbs-f	N	lbs/1000 ft	kg/1000m
18	6	3xCSM	.479	12.1	384	1709	115	513	77.0	114.7
24	6	4xCSM	.518	13.1	512	2279	154	684	97.0	144.5
36	6	6xCSM	.630	16.0	768	3418	230	1025	148.0	220.5
48	6	8xCSM	.792	20.1	1024	4557	307	1367	253.0	377.0
72	6	9x3xCSM	.903	22.9	1536	6837	461	2051	280.0	417.2
36	12	3xCSM	.559	14.1	480	2136	144	641	109.0	162.4
48	12	4xCSM	.614	15.5	640	2848	192	854	139.0	207.1
60	12	5xCSM	.681	17.2	800	3561	240	1068	175.0	260.8
72	12	6xCSM	.750	19.0	960	4272	288	1282	216.0	321.8

Cable Characteristics

Note: Part number rows in upper table directly correspond to cable characteristic rows in the same location of the lower table.

Multi-Unit

Multimode and Singlemode

Multi-Unit (Plenum) (UL) OFNP c(UL) OFNP FT6

Optical Specifications

TIA/EIA-568-C.3 | ISO/IEC 11801, 2nd edition | Telcordia GR-409-CORE

Fiber type	Max. Attenuation (dB/km)		Min OFL Bandwidth (MHz-km)		Min EMBc Bandwidth (MHz-km)		Gb Ethernet distance (m)		10 Gb Ethernet distance (m)	
	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)
OM1	3.5	1.0	200	500	220	N/A	300	550	33	N/A
OM2	3.0	1.0	700	500	950	N/A	750	550	150	N/A
OM3	3.0	1.0	1500	500	2000	N/A	1000	550	300	N/A
OM4	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
OM5*	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
	1310nm (SM)		1550nm (SM)		1310nm (SM)		1550nm (SM)		1310nm (SM)	
	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)
OS2	0.5	0.5	N/A	N/A	N/A	N/A	> 25,000	> 40,000	10,000 - 25,000	40,000

Hitachi Cable America reserves the right to revise any specifications.

*OM5 optical fiber tested by glass manufacturer and exceeds the requirements of all applicable industry standards.


Cable Temperature Ranges

Storage: -40° to 70°C (-40° to 158°F)

Installation: 0° to 60°C (32° to 140°F)

Operating: 0° to 70°C (32° to 158°F)

Features

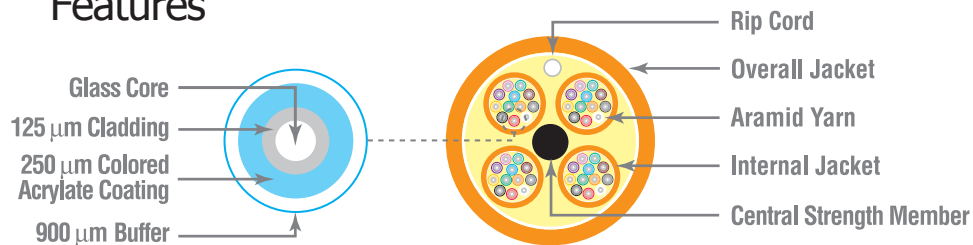


DIELECTRIC MATERIALS


PLENUM

Overall Jacket


Flame-retardant thermoplastic



48-fibers
(8 tubes of 6-fibers)



48-fibers
(4 tubes of 12-fibers)



48-fibers
(12 tubes of 4-fibers)

Diagram scale approx. 1:1

Mechanical Specifications

- Bend radius, no load
= 10x cable overall diameter
- Bend radius, load
= 15x cable overall diameter

plus
CORNING®
ClearCurve® Optical Fiber

FIBER



NanoCore®

2 Through 24 fibers

HITACHI
Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- All multimode, and singlemode cables (except OM1) utilize bend-insensitive optical fibers.
- 250 micron loose tube design allows for higher fiber strand counts in a smaller overall diameter cable.
- LSZH with (OFNR) rating enables use in riser-rated environments. See note under part number table.
- Halogen free design offers improved safety performance.
- Ideal for MPO (MTP™) style connectors.
- Each fiber is color coded for easy identification.
- Flexible and easy to handle.
- Lightweight, flexible Aramid yarns enhance strength.
- When necessary, color-coded binders separate fiber strands into bundles of 12.

Options

- Enhanced bend insensitive OS2 optical fiber is available (ITU-T G.657.B3 & G.657.A2).
- Standard jacket colors are:
Yellow: OS2
Orange: OM1 & OM2
Aqua: OM3 & OM4
Note: Erika Violet for OM4 is available
- 16 Fiber colors are available.
- Colored threads are used to bundle fibers.

Applications

- Applications include 10, 40 & 100 gigabit Ethernet, Fibre Channel, Video, Security, Automation.
- OM5 supports applications utilizing Short Wave Division Multiplexing (SWDM).

Standards

- TIA/EIA-568-C.3
- ISO/IEC 11801, 2nd edition
- Telcordia GR-409-CORE
- OS2 glass is compliant to ITU-T G.657.A1

NanoCore® Interconnect (Single Jacket) Micro Distribution (LSZH/Riser)

Low Smoke Zero Halogens
(UL) OFNR c(UL) OFNR FT4

PART NUMBERS BY FIBER COUNT

FIBERS	Cable OD mm	FIBERS/ BUNDLE	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM4+	50 UM OM5	8.3 UM OS2
2	2.0	-	62424-2	62425-2	62426-2	62427-2	62428-2	62747-2	62429-2
2	3.0	-	62338-2	61631-2	61632-2	61941-2	62438-2	62748-2	61772-2
4	2.0	-	62424-4	62425-4	62426-4	62427-4	62428-4	62747-4	62429-4
4	3.0	-	62338-4	61631-4	61632-4	61941-4	62438-4	62748-4	61772-4
6	2.0	-	62424-6	62425-6	62426-6	62427-6	62428-6	62747-6	62429-6
6	3.0	-	62338-6	61631-6	61632-6	61941-6	62438-6	62748-6	61772-6
12	2.0	-	62424-12	62425-12	62426-12	62427-12	62428-12	62747-12	62429-12
12	3.0	-	62338-12	61631-12	61632-12	61941-12	62438-12	62748-12	61772-12
16	3.0	-	62338-16	61631-16	61632-16	61941-16	62438-16	62716-16	61772-16
16*	3.0	8 X 2	62701-16	62702-16	62703-16	62704-16	62705-16	62706-16	62707-16
24*	3.0	12 X 2	62424-24	62425-24	62426-24	62427-24	62428-24	62747-24	62429-24

SPECIFICATIONS BY FIBER COUNT

				RECOMMENDED MAXIMUM LOADS							
FIBERS	FIBERS/ BUNDLE	CABLE OD		INSTALL		OPERATION		COMPRESSION	IMPACT	CABLE WEIGHT	
		in.	mm	lbs	N	lbs	N	N/cm	N-m	lbs/kft	Kg/Km
2	-	0.078	2.0	50	222	15	67	35	0.74	2.5	3.7
2	-	0.118	3.0	100	445	30	134	100	2.94	4.8	7.2
4	-	0.078	2.0	50	222	15	67	35	0.74	2.6	3.8
4	-	0.118	3.0	100	445	30	134	100	2.94	4.9	7.4
6	-	0.078	2.0	50	222	15	67	35	0.74	2.7	4.0
6	-	0.118	3.0	100	445	30	134	100	2.94	5.0	7.5
12	-	0.078	2.0	50	222	15	67	35	0.74	3.0	4.4
12	-	0.118	3.0	100	445	30	134	100	2.94	5.3	7.9
16	-	0.118	3.0	150	668	45	200	100	2.94	5.2	7.7
16*	8 X 2	0.118	3.0	150	668	45	200	100	2.94	5.2	7.7
24*	12 X 2	0.118	3.0	150	668	45	200	100	0.74	5.9	8.8

Cable Characteristics

Notes: Part number rows in upper table directly correspond to cable characteristic rows in the same location of the lower table.
*These cable designs utilize color-coded binders to separate subunits.

Micro Distribution Multimode and Singlemode

NanoCore® Interconnect (Single Jacket)

Micro Distribution (LSZH/Riser)

Low Smoke Zero Halogens
(UL) OFNR c(UL) OFNR FT4

Optical Specifications

TIA/EIA-568-C.3 | ISO/IEC 11801, 2nd edition | Telcordia GR-409-CORE

Fiber type	Max. Attenuation (dB/km)		Min OFL Bandwidth (MHz-km)		Min EMBc Bandwidth (MHz-km)		Gb Ethernet distance (m)		10 Gb Ethernet distance (m)	
	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)
OM1	3.5	1.0	200	500	220	N/A	300	550	33	N/A
OM2	2.8	1.0	700	500	950	N/A	750	550	150	N/A
OM3	2.8	1.0	1500	500	2000	N/A	1000	550	300	N/A
OM4	2.8	1.0	3500	500	4700	N/A	1100	550	550	N/A
OM4+	2.8	1.0	3500	500	5350	N/A	N/A	N/A	600	N/A
OM5*	2.8	1.0	3500	500	4700	N/A	1100	550	550	N/A
	1310nm (SM)		1550nm (SM)		1310nm (SM)		1550nm (SM)		1310nm (SM)	
	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)
OS2	0.5	0.5	N/A	N/A	N/A	N/A	> 25,000	> 40,000	10,000 - 25,000	40,000


Hitachi Cable America reserves the right to revise any specifications.

*OM5 optical fiber tested by glass manufacturer and exceeds the requirements of all applicable industry standards.

Cable Temperature Ranges

Storage: -40° to 70°C (-40° to 158°F)
Installation: -10° to 60°C (14° to 140°F)
Operating: -20° to 70°C (-4° to 158°F)

Features

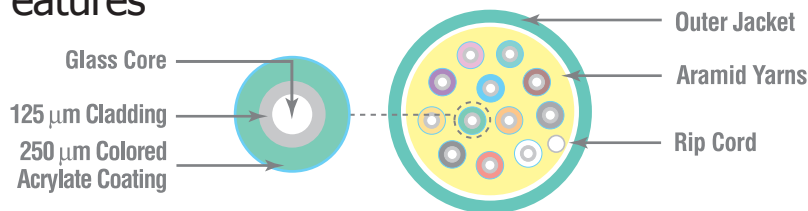

DIELECTRIC MATERIALS

LSZH/RISER

Overall Jacket

Flame-retardant thermoplastic

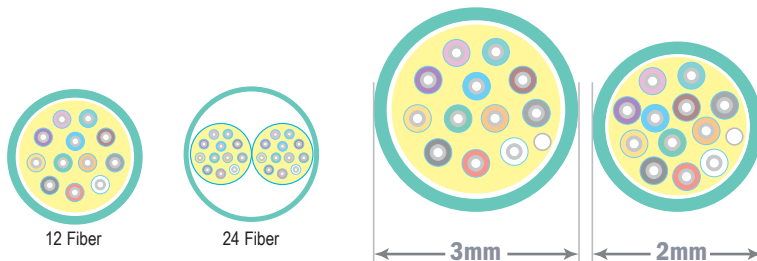


Diagram scale approx. 5:1

New 2mm cable has 33% smaller OD and 56% smaller area than 3mm cable.

Mechanical Specifications

- Bend radius, no load
= 10x cable overall diameter
- Bend radius, load
= 15x cable overall diameter

plus
CORNING®
ClearCurve® Optical Fiber



NanoCore®

2 Through 32 fibers

HITACHI
Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- All multimode, and singlemode cables (except OM1) utilize bend-insensitive optical fibers.
- 250 micron loose tube design allows for higher fiber strand counts in a smaller overall diameter cable.
- Ideal for MPO (MTP™) style connectors.
- Each fiber is color coded for easy identification.
- Flexible and easy to handle.
- Lightweight, flexible Aramid yarns enhance strength.
- Now available with a smaller outside diameter.
- When necessary, color-coded binders separate fiber strands into bundles of 12.

Options

- Enhanced bend insensitive OS2 optical fiber is available (ITU-T G.657.B3 & G.657.A2).
- Standard jacket colors are:
Yellow: OS2
Orange: OM1 & OM2
Aqua: OM3 & OM4
Note: Erika Violet for OM4 is available
- 16 Fiber colors are available.
- Colored threads are used to bundle fibers.

Applications

- OM5 supports applications utilizing Short Wave Division Multiplexing (SWDM).

Standards

- TIA/EIA-568-C.3
- ISO/IEC 11801, 2nd edition
- Telcordia GR-409-CORE
- OS2 glass is compliant to ITU-T G.657.A1

NanoCore® Interconnect (Single Jacket) Micro Distribution (Plenum) (UL) OFNP c(UL) OFNP FT6

PART NUMBERS BY FIBER COUNT

FIBERS	Cable OD mm	FIBERS/ BUNDLE or TUBE	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM4+	50 UM OM5	8.3 UM OS2
2	2.0	-	62241-2	62242-2	62243-2	62244-2	62412-2	62749-2	62239-2
2	3.0	-	61537-2	61506-2	61507-2	61883-2	62411-2	62750-2	61538-2
4	2.0	-	62241-4	62242-4	62243-4	62244-4	62412-4	62749-4	62239-4
4	3.0	-	61537-4	61506-4	61507-4	61883-4	62411-4	62750-4	61538-4
6	2.0	-	62241-6	62242-6	62243-6	62244-6	62412-6	62749-6	62239-6
6	3.0	-	61537-6	61506-6	61507-6	61883-6	62411-6	62750-6	61538-6
8 DJ	4.8	-	62675-8	62676-8	62449-8	62450-8	62677-8	62678-8	62460-8
12	2.0	-	62241-12	62242-12	62243-12	62244-12	62412-12	62749-12	62239-12
12	3.0	-	61537-12	61506-12	61507-12	61883-12	62411-12	62750-12	61538-12
12	3.8	-	62372-12	62373-12	62374-12	62375-12	62382-12	62751-12	62371-12
12 DJ	4.8	-	62675-12	62676-12	62449-12	62450-12	62677-12	62678-12	62460-12
16	3.0	-	62683-16	62684-16	62685-16	62686-16	62687-16	62688-16	62689-16
16*	3.0	8 X 2	62692-16	62693-16	62694-16	62695-16	62696-16	62697-16	62698-16
16 DJ	4.8	-	62675-16	62676-16	62449-16	62450-16	62677-16	62678-16	62460-16
24*	3.0	12 X 2	62241-24	62242-24	62243-24	62244-24	62412-24	62749-24	62239-24
24*	3.8	12 X 2	62372-24	62373-24	62374-24	62375-24	62382-24	62751-24	62371-24
24*	4.5	12 X 2	61537-24	61506-24	61507-24	61883-24	62411-24	62750-24	61538-24
24 DJ*	4.8	12 X 2	62675-24	62676-24	62449-24	62450-24	62677-24	62678-24	62460-24
32*	3.6	8 X 4	62332-32	62333-32	62431-32	62335-32	62711-32	62712-32	62336-32
32*	3.6	16 X 2	62489-32	62490-32	62491-32	62492-32	62493-32	62715-32	62494-32
12	3.0 x 6.47	6	62753-12	61546-12	61539-12	61882-12	62430-12	62752-12	61547-12
24	3.0 x 6.47	12	62753-24	61546-24	61539-24	61882-24	62430-24	62752-24	61547-24

SPECIFICATIONS BY FIBER COUNT

FIBERS	FIBERS/ BUNDLE or TUBE	CABLE OD		RECOMMENDED MAXIMUM LOADS						CABLE WEIGHT	
				INSTALL		OPERATION		COMPRESSION	IMPACT		
		in.	mm	lbs	N	lbs	N	N/cm	N-m	lbs/kft	Kg/Km
2	-	0.078	2.0	50	222	15	67	35	0.74	2.5	3.7
2	-	0.118	3.0	100	445	30	134	100	0.74	5.5	8.2
4	-	0.078	2.0	50	222	15	67	35	0.74	2.6	3.8
4	-	0.118	3.0	100	445	30	134	100	0.74	5.6	8.3
6	-	0.078	2.0	50	222	15	67	35	0.74	2.7	4.0
6	-	0.118	3.0	100	445	30	134	100	0.74	5.6	8.3
8 DJ	-	0.189	4.8	150	668	45	200	35	2.94	14.3	21.3
12	-	0.078	2.0	50	222	15	67	35	0.74	2.9	4.4
12	-	0.118	3.0	100	445	30	134	100	0.74	5.9	8.8
12	-	0.150	3.8	150	668	45	200	35	2.94	9.1	13.6
12 DJ	-	0.189	4.8	150	668	45	200	35	2.94	14.5	21.6
16	-	0.118	3.0	150	668	45	200	100	0.74	5.2	7.7
16*	8 X 2	0.118	3.0	150	668	45	200	100	0.74	5.2	7.7
16 DJ	-	0.189	4.8	150	668	45	200	35	2.94	14.7	21.9
24*	12 X 2	0.118	3.0	150	668	45	200	100	0.74	5.7	8.5
24*	12 X 2	0.150	3.8	150	668	45	200	35	2.94	9.7	14.5
24*	12 X 2	0.177	4.5	150	668	45	200	100	2.94	13.1	19.5
24 DJ*	12 X 2	0.189	4.8	150	668	45	200	35	2.94	15	22.3
32*	8 X 4	0.142	3.6	150	668	45	200	100	2.94	7.3	10.9
32*	16 X 2	0.142	3.6	150	668	45	200	100	2.94	7.3	10.9
12	6	.118 x .255	3.0 x 6.47	128	569	38	171	100	2.94	11.3	16.8
24	12	.118 x .255	3.0 x 6.47	128	569	38	171	100	2.94	11.4	17.0

Cable Characteristics

Notes: Part number rows in upper table directly correspond to cable characteristic rows in the same location of the lower table.

*These cable designs utilize color-coded binders to separate subunits.

DJ: Dual jacket design.

Micro Distribution Multimode and Singlemode

NanoCore® Interconnect (Single Jacket) Micro Distribution (Plenum) (UL) OFNP c(UL) OFNP FT6

Optical Specifications

TIA/EIA-568-C.3 | ISO/IEC 11801, 2nd edition | Telcordia GR-409-CORE

Fiber type	Max. Attenuation (dB/km)		Min OFL Bandwidth (MHz-km)		Min EMBc Bandwidth (MHz-km)		Gb Ethernet distance (m)		10 Gb Ethernet distance (m)	
	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)
OM1	3.5	1.0	200	500	220	N/A	300	550	33	N/A
OM2	2.8	1.0	700	500	950	N/A	750	550	150	N/A
OM3	2.8	1.0	1500	500	2000	N/A	1000	550	300	N/A
OM4	2.8	1.0	3500	500	4700	N/A	1100	550	550	N/A
OM4+	2.8	1.0	3500	500	5350	N/A	N/A	N/A	600	N/A
OM5*	2.8	1.0	3500	500	4700	N/A	1100	550	550	N/A
	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)
OS2	0.5	0.5	N/A	N/A	N/A	N/A	> 25,000	> 40,000	10,000 - 25,000	40,000


Hitachi Cable America reserves the right to revise any specifications.

*OM5 optical fiber tested by glass manufacturer and exceeds the requirements of all applicable industry standards.

Cable Temperature Ranges

Storage: -40° to 70°C (-40° to 158°F)
Installation: 0° to 60°C (32° to 140°F)
Operating: 0° to 70°C (32° to 158°F)

Features

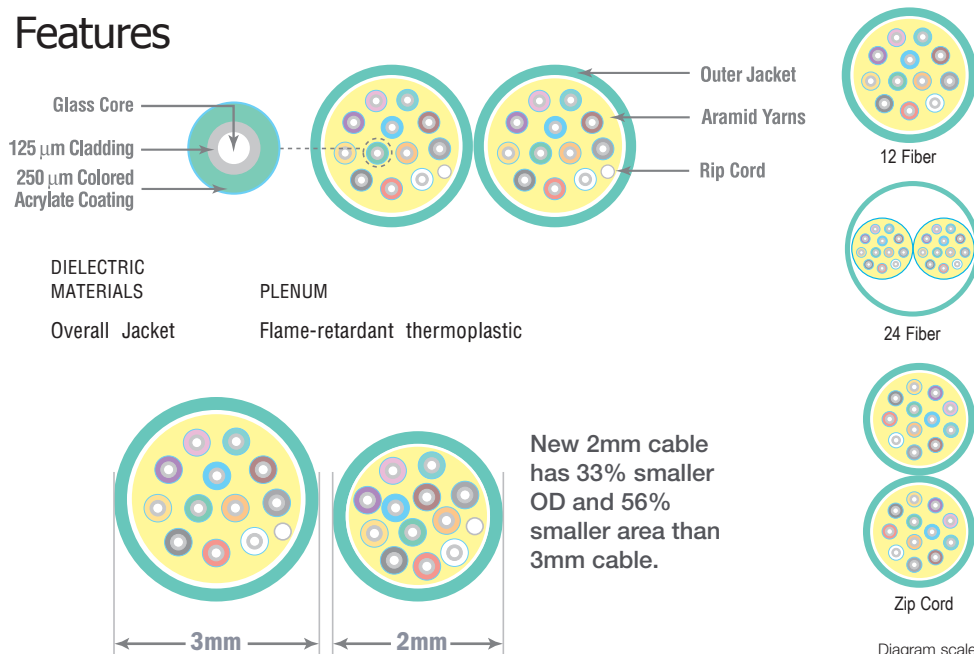

Mechanical Specifications

- Bend radius, no load
= 10x cable overall diameter
- Bend radius, load
= 15x cable overall diameter

plus
CORNING®
ClearCurve® Optical Fiber

FIBER



NanoCore®

24 through 144 fibers

HITACHI

Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- All multimode, and singlemode cables (except OM1) utilize bend-insensitive optical fibers.
- Small, lightweight construction suitable for installations where space is at a premium.
- Ideal for MPO (MTP™) style connectors.
- Each fiber is color coded for easy identification.
- Flexible and easy to handle.
- OFNR rating provided by UL.
- Additional IEC test 60332-3-24 performed by HCA to ensure performance to industry standards.

Options

- 8 fibers per tube available up to 96 & 16 fibers per tube up to 144.
- Standard jacket colors are:
Yellow: OS2
Orange: OM1 & OM2
Aqua: OM3 & OM4
Note: Erika Violet for OM4 is available
- 16 Fiber colors are available.
- Enhanced bend insensitive OS2 optical fiber is available (ITU-T G.657.B3 & G.657.A2).

Applications

- Ideal for high-density installations like data centers, central offices and overall premise applications where current or future data rates include 40 and 100 gigabits per second.
- OM5 supports applications utilizing Short Wave Division Multiplexing (SWDM).

Standards

- TIA/EIA-568-C.3
- ISO/IEC 11801, 2nd edition
- Telcordia GR-409-CORE
- OS2 glass is compliant to ITU-T G.657.A1

NanoCore® Multi-Unit Micro Distribution

(LSZH/Riser) Low Smoke Zero Halogens & Riser Rated
(UL) OFNR c(UL) OFNR FT4 (UL) LSHF

PART NUMBERS BY FIBER COUNT

FIBER COUNT	FIBERS PER TUBE	TUBE LAYOUT	TUBE OD mm	CABLE OD mm	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM4+	50 UM OM5	8.3 UM OS2
24	12	2+2FxCSM	2.0	8.0	62337-24	62323-24	62295-24	62296-24	62755-24	62754-24	62294-24
36	12	3+1FxCSM	2.0	8.0	62337-36	62323-36	62295-36	62296-36	62755-36	62754-36	62294-36
48	12	4xCSM	2.0	8.0	62337-48	62323-48	62295-48	62296-48	62755-48	62754-48	62294-48
72	12	6xCSM	2.0	8.8	62337-72	62323-72	62295-72	62296-72	62755-72	62754-72	62294-72
96	12	8xCSM	2.0	9.9	62337-96	62323-96	62295-96	62296-96	62755-96	62754-96	62294-96
144	12	9x3xCSM	2.0	11.2	62337-144	62323-144	62295-144	62296-144	62755-144	62754-144	62294-144

SPECIFICATIONS BY FIBER COUNT

FIBER COUNT	FIBERS/TUBE	TUBE LAYOUT	RECOMMENDED MAXIMUM LOADS									
			TUBE OD		CABLE OD		INSTALL		OPERATION		CABLE WEIGHT	
			in.	mm	in.	mm	lbs	N	lbs	N	lbs/kft	kg/km
24	12	2+2FxCSM	0.079	2.0	0.315	8.0	300	1335	90	401	36.8	54.8
36	12	3+1FxCSM	0.079	2.0	0.315	8.0	300	1335	90	401	37.4	55.7
48	12	4xCSM	0.079	2.0	0.315	8.0	300	1335	90	401	38.0	56.6
72	12	6xCSM	0.079	2.0	0.346	8.8	300	1335	90	401	47.5	70.7
96	12	8xCSM	0.079	2.0	0.388	9.9	300	1335	90	401	65.1	96.9
144	12	9x3xCSM	0.079	2.0	0.440	11.2	300	1335	90	401	64.6	96.1

Cable Characteristics

F = Filler

CSM = Central Strength Member.

Note: Part number rows in upper table directly correspond to cable characteristic rows in the same location of the lower table.

Micro Distribution Multimode and Singlemode

NanoCore® Multi-Unit Micro Distribution (LSZH/Riser) Low Smoke Zero Halogens & Riser Rated (UL) OFNR c(UL) OFNR FT4 (UL) LSHF

Optical Specifications

TIA/EIA-568-C.3 | ISO/IEC 11801, 2nd edition | Telcordia GR-409-CORE

Fiber type	Max. Attenuation (dB/km)		Min OFL Bandwidth (MHz-km)		Min EMBc Bandwidth (MHz-km)		Gb Ethernet distance (m)		10 Gb Ethernet distance (m)	
	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)
OM1	3.5	1.0	200	500	220	N/A	300	550	33	N/A
OM2	2.8	1.0	700	500	950	N/A	750	550	150	N/A
OM3	2.8	1.0	1500	500	2000	N/A	1000	550	300	N/A
OM4	2.8	1.0	3500	500	4700	N/A	1100	550	550	N/A
OM5*	2.8	1.0	3500	500	4700	N/A	1100	550	550	N/A
	1310nm (SM)		1550nm (SM)		1310nm (SM)		1550nm (SM)		1310nm (SM)	
	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)
OS2	0.5	0.5	N/A	N/A	N/A	N/A	> 25,000	> 40,000	10,000 - 25,000	40,000


Hitachi Cable America reserves the right to revise any specifications.

*OM5 optical fiber tested by glass manufacturer and exceeds the requirements of all applicable industry standards.

Cable Temperature Ranges

Storage: -40° to 70°C (-40°F to 158°F)
Installation: -10° to 60°C (14°F to 140°F)
Operating: -20° to 70°C (-4°F to 158°F)

Features

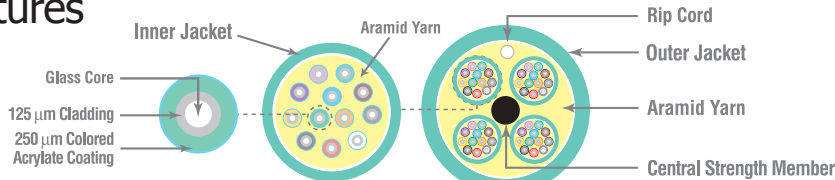


DIELECTRIC MATERIALS

LSZH/RISER

Overall Jacket


Flame-retardant thermoplastic




12 fibers



24 fibers



48 fibers



144 fibers

Mechanical Specifications

- Bend radius, no load
= 10x cable overall diameter
- Bend radius, load
= 15x cable overall diameter
- Compliant to TIA 568-C.3, ISO/IEC 11801 & Telcordia GR-409

plus
CORNING®
ClearCurve® Optical Fiber



NanoCore®

24 through 288 fibers

HITACHI

Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- All multimode, and singlemode cables (except OM1) utilize bend-insensitive optical fibers.
- Small, lightweight construction suitable for installations where space is at a premium.
- Ideal for MPO (MTP™) style connectors.
- Each fiber is color coded for easy identification.
- Flexible and easy to handle.

Options

- 8 fibers per tube available up to 96 & 16 fibers per tube up to 144.
- Standard jacket colors are:
Yellow: OS2
Orange: OM1 & OM2
Aqua: OM3 & OM4
Note: Erika Violet for OM4 is available
- 16 Fiber colors are available.
- Enhanced bend insensitive OS2 optical fiber is available (ITU-T G.657.B3).

Applications

- Ideal for high-density installations like data centers, central offices and overall premise applications where current or future data rates include 40 and 100 gigabits per second.
- For additional applications, visit the HCA website.
- OM5 supports applications utilizing Short Wave Division Multiplexing (SWDM).

Standards

- TIA/EIA-568-C.3
- ISO/IEC 11801, 2nd edition
- Telcordia GR-409-CORE
- OS2 glass is compliant to ITU-T G.657.A1

NanoCore® Multi-Unit Micro Distribution (Plenum) (UL) OFNP c(UL) OFNP FT6

PART NUMBERS BY FIBER COUNT

FIBER COUNT	FIBERS PER TUBE	TUBE LAYOUT	TUBE OD mm	CABLE OD mm	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM4+	50 UM OM5	8.3 UM OS2
24	12	2+2FxCSM	2.0	7.5	62220-24	62214-24	62216-24	62218-24	62413-24	62668-24	62205-24
24	12	2+2FxCSM	3.0	9.1	62593-24	62594-24	62595-24	62596-24	62597-24	62650-24	62598-24
36	12	3+1FxCSM	2.0	7.5	62220-36	62214-36	62216-36	62218-36	62413-36	62668-36	62205-36
36	12	3+1FxCSM	3.0	9.1	62593-36	62594-36	62595-36	62596-36	62597-36	62650-36	62598-36
48	12	4xCSM	2.0	7.5	62220-48	62214-48	62216-48	62218-48	62413-48	62668-48	62205-48
48	12	4xCSM	3.0	9.1	62593-48	62594-48	62595-48	62596-48	62597-48	62650-48	62598-48
72	12	6xCSM	2.0	8.4	62220-72	62214-72	62216-72	62218-72	62413-72	62668-72	62205-72
72	12	6xCSM	3.0	10.4	62593-72	62594-72	62595-72	62596-72	62597-72	62650-72	62598-72
96	12	8xCSM	2.0	11.0	62220-96	62214-96	62216-96	62218-96	62413-96	62668-96	62205-96
96	12	8xCSM	3.0	12.2	62593-96	62594-96	62595-96	62596-96	62597-96	62650-96	62598-96
144	12	9x3xCSM	2.0	11.6	62220-144	62214-144	62216-144	62218-144	62413-144	62668-144	62205-144
144	12	9x3xCSM	3.0	14.4	62593-144	62594-144	62595-144	62596-144	62597-144	62650-144	62598-144
192*	24	8+4FxCSM	3.0	15.8	62544-192	62545-192	62546-192	62547-192	62548-192	62941-192	62549-198
288*	24	9x3xCSM	3.0	15.8	62544-288	62545-288	62546-288	62547-288	62548-288	62941-188	62549-288

SPECIFICATIONS BY FIBER COUNT

FIBER COUNT	FIBERS/TUBE	TUBE LAYOUT	RECOMMENDED MAXIMUM LOADS									
			TUBE OD		CABLE OD		INSTALL	OPERATION	CABLE WEIGHT			
			in.	mm	in.	mm						
24	12	2+2FxCSM	0.079	2.0	0.296	7.5	150	668	45	200	36.4	54.2
24	12	2+2FxCSM	0.118	3.0	0.357	9.1	150	668	45	200	43.45	64.7
36	12	3+1FxCSM	0.079	2.0	0.296	7.5	150	668	45	200	37.4	55.7
36	12	3+1FxCSM	0.118	3.0	0.357	9.1	150	668	45	200	43.98	65.5
48	12	4xCSM	0.079	2.0	0.296	7.5	150	668	45	200	38.3	57.0
48	12	4xCSM	0.118	3.0	0.357	9.1	150	668	45	200	44.51	66.3
72	12	6xCSM	0.079	2.0	0.332	8.4	150	668	45	200	48.3	71.9
72	12	6xCSM	0.118	3.0	0.411	10.4	150	668	45	200	63.61	94.7
96	12	8xCSM	0.079	2.0	0.433	11.0	150	668	45	200	83.8	124.7
96	12	8xCSM	0.118	3.0	0.482	12.2	150	668	45	200	89.95	133.9
144	12	9x3xCSM	0.079	2.0	0.458	11.6	150	668	45	200	88.9	132.3
144	12	9x3xCSM	0.118	3.0	0.568	14.4	150	668	45	200	95.26	141.8
192*	24	8+4FxCSM	0.118	3.0	0.624	15.8	150	668	45	200	157.36	234.18
288*	24	9x3xCSM	0.118	3.0	0.624	15.8	150	668	45	200	157.36	234.18

Cable Characteristics

F = Filler

CSM = Central Strength Member.

Notes: Part number rows in upper table directly correspond to cable characteristic rows in the same location of the lower table.

*These cable designs utilize a colored thread to separate fibers into bundles of 12.

Micro Distribution Multimode and Singlemode

NanoCore® Multi-Unit Micro Distribution (Plenum) (UL) OFNP c(UL) OFNP FT6

Optical Specifications

TIA/EIA-568-C.3 | ISO/IEC 11801, 2nd edition | Telcordia GR-409-CORE

Fiber type	Max. Attenuation (dB/km)		Min OFL Bandwidth (MHz-km)		Min EMBc Bandwidth (MHz-km)		Gb Ethernet distance (m)		10 Gb Ethernet distance (m)	
	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)
OM1	3.5	1.0	200	500	220	N/A	300	550	33	N/A
OM2	2.8	1.0	700	500	950	N/A	750	550	150	N/A
OM3	2.8	1.0	1500	500	2000	N/A	1000	550	300	N/A
OM4	2.8	1.0	3500	500	4700	N/A	1100	550	550	N/A
OM4+	2.8	1.0	3500	500	5350	N/A	N/A	N/A	600	N/A
OM5*	2.8	1.0	3500	500	4700	N/A	1100	550	550	N/A
	1310nm (SM)		1550nm (SM)		1310nm (SM)		1550nm (SM)		1310nm (SM)	
	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)
OS2	0.5	0.5	N/A	N/A	N/A	N/A	> 25,000	> 40,000	10,000 - 25,000	40,000

Hitachi Cable America reserves the right to revise any specifications.

*OM5 optical fiber tested by glass manufacturer and exceeds the requirements of all applicable industry standards.

Cable Temperature Ranges

Storage: -40° to 70°C (-40° to 158°F)
Installation: 0° to 60°C (32° to 140°F)
Operating: 0° to 70°C (32° to 158°F)

Mechanical Specifications


- Bend radius, no load
= 10x cable overall diameter
- Bend radius, load
= 15x cable overall diameter
- Compliant to TIA 568-C.3, ISO/IEC 11801 & Telcordia GR-409

plus
CORNING®
ClearCurve® Optical Fiber

FIBER



Features

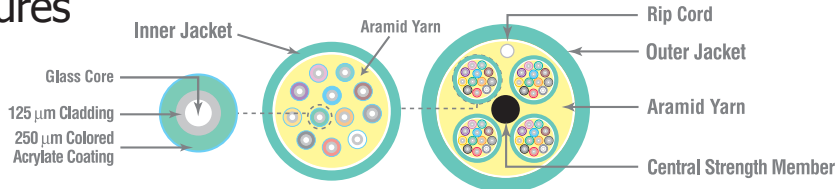

DIELECTRIC MATERIALS


PLENUM

Overall Jacket


Flame-retardant thermoplastic



24 fibers



48 fibers



144 fibers

NanoCore® Armored

24 through 144 fibers

HITACHI

Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- All multimode, and singlemode cables (except OM1) utilize bend-insensitive optical fibers.
- Eliminates need for inner duct or conduit.
- Ideal for MPO (MTP™) style connectors.
- Aluminum interlock armor.
- Each fiber is color coded for easy identification.
- Flexible and easy to handle.
- Low Smoke Zero Halogen and Riser rating delivers improved environmental characteristics.

Options

- 8 fibers per tube available for cables up to 96 strands.
- 16 fibers per tube and 24 fibers per tube up to 144 Fiber.
- OS2 optical fibers with enhanced bend-insensitive performance are available.
- Standard jacket colors are:
Yellow: OS2
Orange: OM1 & OM2
Aqua: OM3 & OM4
Note: Erika Violet for OM4 is available
- 16 Fiber colors are available.
- OM4+ optical fibers with extended 10 gigabit Ethernet distances are available.
- Enhanced bend insensitive OS2 optical fiber is available (ITU-T G.657.B3).

Applications

- Ideal for high-density installations like data centers, central offices and overall premise applications where current or future data rates include 40 and 100 gigabits per second.
- OM5 supports applications utilizing Short Wave Division Multiplexing (SWDM).

Standards

- TIA/EIA-568-C.3
- ISO/IEC 11801, 2nd edition
- Telcordia GR-409-CORE
- OS2 glass is compliant to ITU-T G.657.A1

Armored NanoCore® Micro Distribution Multi-Unit (LSZH/Riser)

Low Smoke No Halogens (UL) OFNR c(UL) OFNR FT4

PART NUMBERS BY FIBER COUNT

FIBER COUNT	FIBERS PER TUBE	TUBE LAYOUT	TUBE OD mm	CABLE OD mm	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM4+	50 UM OM5	8.3 UM OS2
12	12	1T+3FxCSM	2.0	16.1	62353-12	62354-12	62355-12	62356-12	62820-12	62821-12	62352-12
24	12	2T+2FxCSM	2.0	16.1	62353-24	62354-24	62355-24	62356-24	62820-24	62821-24	62352-24
36	12	3T+1FxCSM	2.0	16.1	62353-36	62354-36	62355-36	62356-36	62820-36	62821-36	62352-36
48	12	4xCSM	2.0	16.1	62353-48	62354-48	62355-48	62356-48	62820-48	62821-48	62352-48
72	12	6xCSM	2.0	17.1	62353-72	62354-72	62355-72	62356-72	62820-72	62821-72	62352-72
96	12	8xCSM	2.0	18.2	62353-96	62354-96	62355-96	62356-96	62820-96	62821-96	62352-96
144	12	9x3xCSM	2.0	19.8	62353-144	62354-144	62355-144	62356-144	62820-144	62821-144	62352-144

SPECIFICATIONS BY FIBER COUNT

FIBER COUNT	FIBERS/TUBE	TUBE LAYOUT	RECOMMENDED MAXIMUM LOADS									
			TUBE OD		CABLE OD		INSTALL		OPERATION		CABLE WEIGHT	
			in.	mm	in.	mm	lbs	N	lbs	N	lbs/kft	kg/km
12	12	1T+3FxCSM	0.079	2.0	0.635	16.1	300	1335	90	401	142.5	212.1
24	12	2T+2FxCSM	0.079	2.0	0.635	16.1	300	1335	90	401	142.5	212.1
36	12	3T+1FxCSM	0.079	2.0	0.635	16.1	300	1335	90	401	143.1	213.0
48	12	4xCSM	0.079	2.0	0.635	16.1	300	1335	90	401	143.7	213.9
72	12	6xCSM	0.079	2.0	0.675	17.1	300	1335	90	401	161.3	240.2
96	12	8xCSM	0.079	2.0	0.715	18.2	300	1335	90	401	187.1	278.5
144	12	9x3xCSM	0.079	2.0	0.780	19.8	300	1335	90	401	199.9	297.6

Cable Characteristics

F = Filler

CSM = Central Strength Member.

Note: Part number rows in upper table directly correspond to cable characteristic rows in the same location of the lower table.

Micro Distribution Multimode and Singlemode

Armored NanoCore® Micro Distribution Multi-Unit (LSZH/Riser)

Low Smoke No Halogens (UL) OFNR c(UL) OFNR FT4

Optical Specifications

TIA/EIA-568-C.3 | ISO/IEC 11801, 2nd edition | Telcordia GR-409-CORE

Fiber type	Max. Attenuation (dB/km)		Min OFL Bandwidth (MHz-km)		Min EMBc Bandwidth (MHz-km)		Gb Ethernet distance (m)		10 Gb Ethernet distance (m)	
	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)
OM1	3.5	1.0	200	500	220	N/A	300	550	33	N/A
OM2	2.8	1.0	700	500	950	N/A	750	550	150	N/A
OM3	2.8	1.0	1500	500	2000	N/A	1000	550	300	N/A
OM4	2.8	1.0	3500	500	4700	N/A	1100	550	550	N/A
OM4+	2.8	1.0	3500	500	5350	N/A	N/A	N/A	600	N/A
OM5*	2.8	1.0	3500	500	4700	N/A	1100	550	550	N/A
	1310nm (SM)		1550nm (SM)		1310nm (SM)		1550nm (SM)		1310nm (SM)	
	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)
OS2	0.5	0.5	N/A	N/A	N/A	N/A	> 25,000	> 40,000	10,000 - 25,000	40,000

Hitachi Cable America reserves the right to revise any specifications.

*OM5 optical fiber tested by glass manufacturer and exceeds the requirements of all applicable industry standards.


Cable Temperature Ranges

Storage: -40° to 70°C (-40° to 158°F)

Installation: 0° to 60°C (32° to 140°F)

Operating: 0° to 70°C (32° to 158°F)

Features

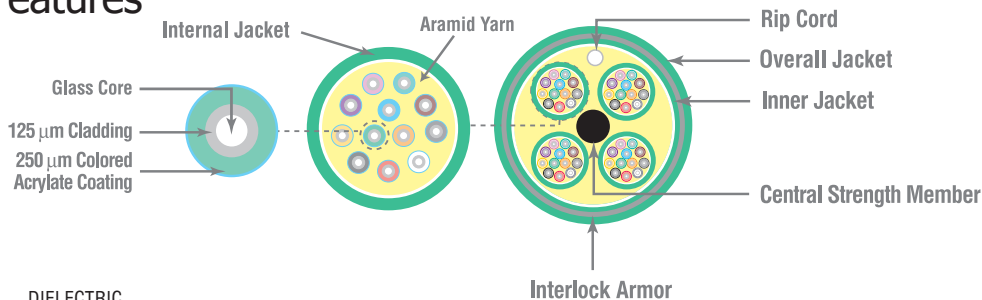


DIELECTRIC MATERIALS


Overall Jacket

LSZH/RISER


Flame-retardant thermoplastic



24 fibers



48 fibers



144 fibers

Mechanical Specifications

- Bend radius, no load
= 15x cable overall diameter
- Bend radius, load
= 20x cable overall diameter

plus
CORNING®
ClearCurve® Optical Fiber



FIBER

NanoCore® Armored

12 through 144 fibers

HITACHI

Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- All multimode, and singlemode cables (except OM1) utilize bend-insensitive optical fibers.
- Eliminates need for inner duct or conduit.
- Ideal for MPO (MTP™) style connectors.
- Aluminum interlock armor.
- Each fiber is color coded for easy identification.
- Flexible and easy to handle.

Options

- Riser/LSZH cables available.
- 8 and 16 fibers per tube available
- Standard jacket colors are:
Yellow: OS2
Orange: OM1 & OM2
Aqua: OM3 & OM4
Note: Erika Violet for OM4 is available
- 16 Fiber colors are available.
- OM4+ optical fibers with extended 10 gigabit Ethernet distances are available.
- Enhanced bend insensitive OS2 optical fiber is available (ITU-T G.657.B3).

Applications

- Ideal for high-density installations like data centers, central offices and overall premise applications where current or future data rates include 40 and 100 gigabits per second.
- For additional applications, visit the HCA website.
- OM5 supports applications utilizing Short Wave Division Multiplexing (SWDM).

Standards

- TIA/EIA-568-C.3
- ISO/IEC 11801, 2nd edition
- Telcordia GR-409-CORE
- OS2 glass is compliant to ITU-T G.657.A1

Armored NanoCore® Micro Distribution (Plenum) (UL) OFCP c(UL) OFCP FT6

PART NUMBERS BY FIBER COUNT

FIBER COUNT	FIBERS PER TUBE	TUBE LAYOUT	TUBE OD mm	CABLE OD mm	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM5	8.3 UM OS2
12	12	2+2FxCSM	2.0	14.8	62285-12	62286-12	62251-12	62257-12	62756-12	62255-12
12	12	2+2FxCSM	3.0	17.4	62632-12	62633-12	62634-12	62635-12	62637-12	62638-12
24	12	2+2FxCSM	2.0	14.8	62285-24	62286-24	62251-24	62257-24	62756-24	62255-24
24	12	2+2FxCSM	3.0	17.4	62632-24	62633-24	62634-24	62635-24	62637-24	62638-24
36	12	3+1FxCSM	2.0	14.8	62285-36	62286-36	62251-36	62257-36	62756-36	62255-36
36	12	3+1FxCSM	3.0	17.4	62632-36	62633-36	62634-36	62635-36	62637-36	62638-36
48	12	4xCSM	2.0	14.8	62285-48	62286-48	62251-48	62257-48	62756-48	62255-48
48	12	4xCSM	3.0	17.4	62632-48	62633-48	62634-48	62635-48	62637-48	62638-48
72	12	6xCSM	2.0	16.4	62285-72	62286-72	62251-72	62257-72	62756-72	62255-72
72	12	6xCSM	3.0	18.8	62632-72	62633-72	62634-72	62635-72	62637-72	62638-72
96	12	8xCSM	2.0	17.1	62285-96	62286-96	62251-96	62257-96	62756-96	62255-96
96	12	8xCSM	3.0	21.5	62632-96	62633-96	62634-96	62635-96	62637-96	62638-96
144	12	9x3xCSM	2.0	18.4	62285-144	62286-144	62251-144	62257-144	62756-144	62255-144
144	12	9x3xCSM	3.0	22.8	62632-144	62633-144	62634-144	62635-144	62637-144	62638-144

SPECIFICATIONS BY FIBER COUNT

FIBER COUNT	FIBERS/TUBE	TUBE LAYOUT	TUBE OD		CABLE OD		RECOMMENDED MAXIMUM LOADS					
							INSTALL		OPERATION		CABLE WEIGHT	
			in.	mm	in.	mm	lbs	N	lbs	N	lbs/kft	Kg/Km
12	12	2+2FxCSM	0.079	2.0	0.583	14.8	150	668	45	200	131.0	195.0
12	12	2+2FxCSM	0.118	3.0	0.687	17.4	150	668	45	200	153.4	228.3
24	12	2+2FxCSM	0.079	2.0	0.583	14.8	150	668	45	200	132.0	197.5
24	12	2+2FxCSM	0.118	3.0	0.687	17.4	150	668	45	200	153.4	228.3
36	12	3+1FxCSM	0.079	2.0	0.583	14.8	150	668	45	200	132.0	196.4
36	12	3+1FxCSM	0.118	3.0	0.687	17.4	150	668	45	200	153.9	229.1
48	12	4xCSM	0.079	2.0	0.583	14.8	150	668	45	200	133.0	197.9
48	12	4xCSM	0.118	3.0	0.687	17.4	150	668	45	200	154.4	229.8
72	12	6xCSM	0.079	2.0	0.647	16.4	150	668	45	200	154.0	229.2
72	12	6xCSM	0.118	3.0	0.742	18.8	150	668	45	200	185.4	276.0
96	12	8xCSM	0.079	2.0	0.675	17.1	150	668	45	200	183.0	272.3
96	12	8xCSM	0.118	3.0	0.847	21.5	150	668	45	200	228.9	340.7
144	12	9x3xCSM	0.079	2.0	0.723	18.4	150	668	45	200	194.0	288.7
144	12	9x3xCSM	0.118	3.0	0.897	22.8	150	668	45	200	246.9	367.5

Cable Characteristics

F = Filler
CSM = Central Strength Member.

Note: Part number rows in upper table directly correspond to cable characteristic rows in the same location of the lower table.

Micro Distribution Multimode and Singlemode

Armored NanoCore® Micro Distribution (Plenum) (UL) OFCP c(UL) OFCP FT6

Optical Specifications

TIA/EIA-568-C.3 | ISO/IEC 11801, 2nd edition | Telcordia GR-409-CORE

Fiber type	Max. Attenuation (dB/km)		Min OFL Bandwidth (MHz-km)		Min EMBc Bandwidth (MHz-km)		Gb Ethernet distance (m)		10 Gb Ethernet distance (m)	
	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)
OM1	3.5	1.0	200	500	220	N/A	300	550	33	N/A
OM2	2.8	1.0	700	500	950	N/A	750	550	150	N/A
OM3	2.8	1.0	1500	500	2000	N/A	1000	550	300	N/A
OM4	2.8	1.0	3500	500	4700	N/A	1100	550	550	N/A
OM5*	2.8	1.0	3500	500	4700	N/A	1100	550	550	N/A
	1310nm (SM)		1550nm (SM)		1310nm (SM)		1550nm (SM)		1310nm (SM)	
	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)
OS2	0.5	0.5	N/A	N/A	N/A	N/A	> 25,000	> 40,000	10,000 - 25,000	40,000


Hitachi Cable America reserves the right to revise any specifications.

*OM5 optical fiber tested by glass manufacturer and exceeds the requirements of all applicable industry standards.

Cable Temperature Ranges

Storage: -40° to 70°C (-40° to 158°F)
Installation: 0° to 60°C (32° to 140°F)
Operating: 0° to 70°C (32° to 158°F)

Features

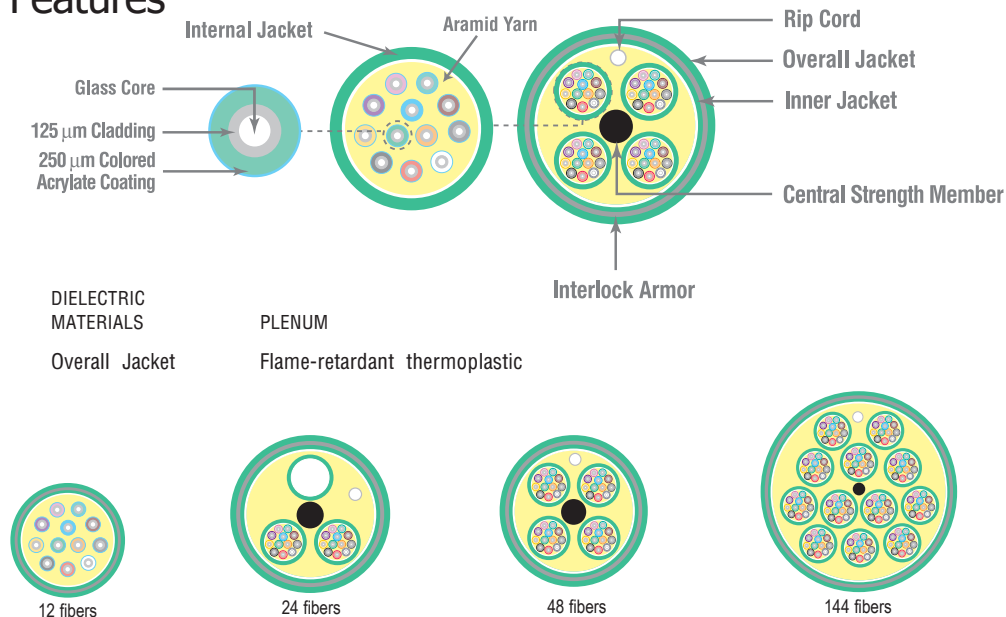

Mechanical Specifications

- Bend radius, no load
= 15x cable overall diameter
- Bend radius, load
= 20x cable overall diameter

plus
CORNING®
ClearCurve® Optical Fiber

FIBER



Armored

2 through 72 fibers

HITACHI

Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- All multimode, and singlemode cables (except OM1) utilize bend-insensitive optical fibers.
- 900 um buffered design recommended for easy termination.
- Eliminates need for inner duct or conduit.
- Aluminum interlock armor.
- Each fiber is color coded for easy identification.
- Ideal intra-building cable solution.
- Flexible and easy to handle.
- Lightweight, flexible aramid yarns enhance strength.

Options

- Enhanced bend insensitive OS2 optical fiber is available (ITU-T G.657.B3 & G.657.A2).
- Standard jacket colors are:
Yellow: OS2
Orange: OM1 & OM2
Aqua: OM3 & OM4
Note: Violet for OM4 is available
- OM4+ optical fibers with extended 10 gigabit Ethernet distances are available.

Applications

- Applications include 10, 40 & 100 gigabit Ethernet, Fibre Channel, Video, Security, Automation.
- OM5 supports applications utilizing Short Wave Division Multiplexing (SWDM).

Standards

- TIA/EIA-568-C.3
- ISO/IEC 11801, 2nd edition
- Telcordia GR-409-CORE

Armored Tight Buffered (Riser) (UL) OFCR c(UL) OFCR FT4

PART NUMBERS BY FIBER COUNT

FIBERS	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM5	8.3 UM OS2
2	61486-2	61542-2	61421-2	61896-2	62811-2	61540-2
4	61486-4	61542-4	61421-4	61896-4	62811-4	61540-4
6	61486-6	61542-6	61421-6	61896-6	62811-6	61540-6
8	61486-8	61542-8	61421-8	61896-8	62811-8	61540-8
10	61486-10	61542-10	61421-10	61896-10	62811-10	61540-10
12	61486-12	61542-12	61421-12	61896-12	62811-12	61540-12
24	61486-24	61542-24	61421-24	61896-24	62811-24	61540-24
48	62016-48	62017-48	62018-48	62019-48	62812-48	61541-48
72	62016-72	62017-72	62018-72	62019-72	62812-72	61541-72

SPECIFICATIONS BY FIBER COUNT

			RECOMMENDED MAXIMUM LOADS					
FIBERS	CABLE O.D.		INSTALL		OPERATION		CABLE WEIGHT	
	in.	mm	lbs-f	N	lbs-f	N	lbs/1000 ft	kg/1000m
2	0.520	13.21	128	570	38	171	93.4	139.2
4	0.520	13.21	128	570	38	171	94.9	141.4
6	0.520	13.21	128	570	38	171	96.4	143.6
8	0.520	13.21	160	712	48	214	109.9	163.8
10	0.520	13.21	160	712	48	214	111.4	166.0
12	0.520	13.21	160	712	48	214	112.9	168.2
24	0.643	16.33	288	1282	86	385	164.1	244.5
48	0.960	24.38	640	2849	192	855	283.7	422.2
72	1.095	27.81	960	4273	288	1282	422.7	629.1

Cable Characteristics

Note: Part number rows in upper table directly correspond to cable characteristic rows in the same location of the lower table.

Multimode and Singlemode **Armored**

Armored Tight Buffered (Riser) (UL) OFCR c(UL) OFCR FT4

Optical Specifications

TIA/EIA-568-C.3 | ISO/IEC 11801, 2nd edition | Telcordia GR-409-CORE

Fiber type	Max. Attenuation (dB/km)		Min OFL Bandwidth (MHz-km)		Min EMBc Bandwidth (MHz-km)		Gb Ethernet distance (m)		10 Gb Ethernet distance (m)	
	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)
OM1	3.5	1.0	200	500	220	N/A	300	550	33	N/A
OM2	3.0	1.0	700	500	950	N/A	750	550	150	N/A
OM3	3.0	1.0	1500	500	2000	N/A	1000	550	300	N/A
OM4	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
OM5*	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
	1310nm (SM)		1550nm (SM)		1310nm (SM)		1550nm (SM)		1310nm (SM)	
	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)
OS2	0.5	0.5	N/A	N/A	N/A	N/A	> 25,000	> 40,000	10,000 - 25,000	40,000


Hitachi Cable America reserves the right to revise any specifications.

*OM5 optical fiber tested by glass manufacturer and exceeds the requirements of all applicable industry standards.

Cable Temperature Ranges

Storage: -40° to 70°C (-40° to 158°F)
 Installation: -10° to 60°C (14° to 140°F)
 Operating: -20° to 70°C (-4° to 158°F)

Features

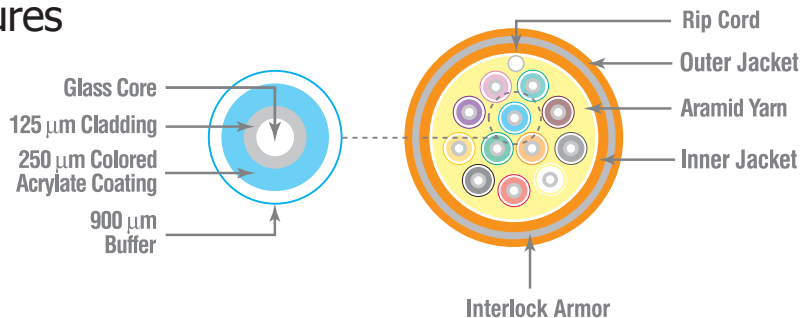

DIELECTRIC MATERIALS

RISER

Overall Jacket

Flame-retardant thermoplastic



2-fiber



4-fiber



6-fiber



8-fiber



10-fiber



12-fiber

Diagram scale approx. 2:1

Mechanical Specifications

- Bend radius, no load
= 15x cable overall diameter
- Bend radius, load
= 20x cable overall diameter

plus
CORNING®
ClearCurve® Optical Fiber

FIBER



Armored

2 through 72 fibers

HITACHI

Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- All multimode, and singlemode cables (except OM1) utilize bend-insensitive optical fibers.
- 900um buffered design recommended for easy termination.
- Eliminates need for inner duct or conduit.
- Aluminum interlock armor.
- Each fiber is color coded for easy identification.
- Ideal intra-building cable solution.
- Flexible and easy to handle.
- Lightweight, flexible aramid yarns enhance strength.

Options

- Standard jacket colors are:
Yellow: OS2
Orange: OM1 & OM2
Aqua: OM3 & OM4
Note: Violet for OM4 is available
- Enhanced bend insensitive OS2 optical fiber is available (ITU-T G.657.B3 & G.657.A2).
- OM4+ optical fibers with extended 10 gigabit Ethernet distances are available.

Applications

- Applications include 10, 40 & 100 gigabit Ethernet, Fibre Channel, Video, Security, Automation.
- OM5 supports applications utilizing Short Wave Division Multiplexing (SWDM).

Standards

- TIA/EIA-568-C.3
- ISO/IEC 11801, 2nd edition
- Telcordia GR-409-CORE

Armored Tight Buffered (Plenum) (UL) OFCP c(UL) OFCP FT6

PART NUMBERS BY FIBER COUNT

FIBERS	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM5	8.3 UM OS2
2	60405-2	61319-2	61337-2	61897-2	62813-2	61433-2
4	60405-4	61319-4	61337-4	61897-4	62813-4	61433-4
6	60405-6	61319-6	61337-6	61897-6	62813-6	61433-6
8	60405-8	61319-8	61337-8	61897-8	62813-8	61433-8
10	60405-10	61319-10	61337-10	61897-10	62813-10	61433-10
12	60405-12	61319-12	61337-12	61897-12	62813-12	61433-12
24	60405-24	61319-24	61337-24	61897-24	62813-24	61433-24
48	62183-48	62184-48	62185-48	62186-48	62814-48	62187-48
72	62183-72	62184-72	62185-72	62186-72	62814-72	62187-72

SPECIFICATIONS BY FIBER COUNT

			RECOMMENDED MAXIMUM LOADS					
FIBERS	CABLE	O.D.	INSTALLATION		OPERATION		CABLE WEIGHT	
	in.	mm	lbs-f	N	lbs-f	N	lbs/1000 ft	kg/1000m
2	0.520	13.21	128	570	38	171	93.5	139.1
4	0.520	13.21	128	570	38	171	94.8	141.1
6	0.520	13.21	128	570	38	171	96.2	143.1
8	0.520	13.21	160	712	48	214	100.5	149.6
10	0.520	13.21	160	712	48	214	101.9	151.6
12	0.520	13.21	160	712	48	214	103.3	153.7
24	0.643	16.33	288	1282	86	385	158.1	235.3
48	0.964	24.49	640	2849	192	855	305.7	454.9
72	1.099	27.91	960	4273	288	1282	453.8	675.3

Cable Characteristics

Note: Part number rows in upper table directly correspond to cable characteristic rows in the same location of the lower table.

Multimode and Singlemode **Armored**

Armored Tight Buffered (Plenum) (UL) OFCP c(UL) OFCP FT6

Optical Specifications

TIA/EIA-568-C.3 | ISO/IEC 11801, 2nd edition | Telcordia GR-409-CORE

Fiber type	Max. Attenuation (dB/km)		Min OFL Bandwidth (MHz-km)		Min EMBc Bandwidth (MHz-km)		Gb Ethernet distance (m)		10 Gb Ethernet distance (m)	
	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)
OM1	3.5	1.0	200	500	220	N/A	300	550	33	N/A
OM2	3.0	1.0	700	500	950	N/A	750	550	150	N/A
OM3	3.0	1.0	1500	500	2000	N/A	1000	550	300	N/A
OM4	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
OM5*	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
	1310nm (SM)		1550nm (SM)		1310nm (SM)		1550nm (SM)		1310nm (SM)	
	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)
OS2	0.5	0.5	N/A	N/A	N/A	N/A	> 25,000	> 40,000	10,000 - 25,000	40,000


Hitachi Cable America reserves the right to revise any specifications.

*OM5 optical fiber tested by glass manufacturer and exceeds the requirements of all applicable industry standards.

Cable Temperature Ranges

Storage: -40° to 70°C (-40° to 158°F)
 Installation: 0° to 60°C (32° to 140°F)
 Operating: 0° to 70°C (32° to 158°F)

Features

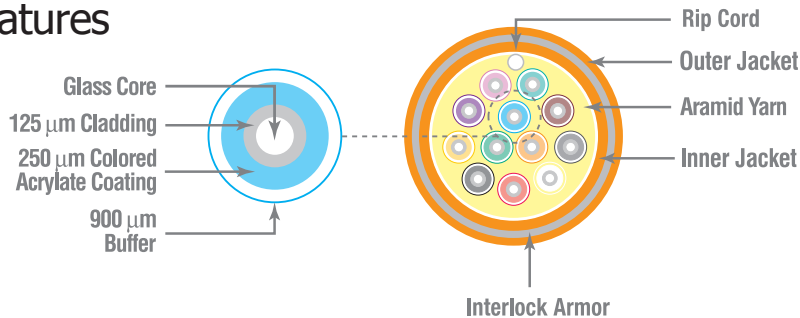


DIELECTRIC MATERIALS

PLENUM

Overall Jacket

Flame-retardant thermoplastic



2-fiber



4-fiber



6-fiber



8-fiber



10-fiber



12-fiber

Diagram scale approx. 2:1

Mechanical Specifications

- Bend radius, no load
= 15x cable overall diameter
- Bend radius, load
= 20x cable overall diameter

plus
CORNING®
ClearCurve® Optical Fiber

FIBER



Armored

2 Through 24 fibers

HITACHI

Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- All multimode, and singlemode cables (except OM1) utilize bend-insensitive optical fibers.
- Eliminates need for innerduct or conduit.
- Aluminum interlock armor standard.
- Each fiber is color coded for easy identification.
- Ideal cable solution for campus environments.
- Flexible and easy to handle.
- UV and fungus resistant jacket.
- Dry, super absorbent polymers (SAPs) eliminate water migration in cable interstices.
- Suitable for lashed aerial, duct, underground conduit and indoor plenum applications.
- 900um buffered design recommended for easy termination.

Options

- Standard color configuration is a black outer jacket with a black inner jacket. Colored inner and outer jackets (orange, yellow & aqua) can be special ordered.
- Enhanced bend insensitive OS2 optical fiber is available (ITU-T G.657.B3 & G.657.A2).
- OM4+ optical fibers with extended 10 gigabit Ethernet distances are available.
- Steel interlock armor available.

Applications

- Applications include 10, 40 & 100 gigabit Ethernet, Fibre Channel, Video, Security, Automation.
- OM5 supports applications utilizing Short Wave Division Multiplexing (SWDM).

Standards

- TIA/EIA-568-C.3
- ISO/IEC 11801, 2nd edition
- Telcordia GR-409-CORE

Indoor/Outdoor Armored Tight Buffered (Plenum)

(UL) OFCP c(UL) OFCP FT6

PART NUMBERS BY FIBER COUNT

FIBERS	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM5	8.3 UM OS2
2	61580-2	61577-2	61578-2	62068-2	62772-2	61579-2
4	61580-4	61577-4	61578-4	62068-4	62772-4	61579-4
6	61580-6	61577-6	61578-6	62068-6	62772-6	61579-6
8	61580-8	61577-8	61578-8	62068-8	62772-8	61579-8
12	61580-12	61577-12	61578-12	62068-12	62772-12	61579-12
24	61580-24	61577-24	61578-24	62068-24	62772-24	61579-24

SPECIFICATIONS BY FIBER COUNT

			RECOMMENDED MAXIMUM LOADS					
FIBERS	CABLE O.D.		INSTALL		OPERATION		CABLE WEIGHT	
	in.	mm	lbs-f	N	lbs-f	N	lbs/1000 ft	kg/1000m
2	0.48	12.192	300	1335	100	445	100.4	149.4
4	0.48	12.192	300	1335	100	445	101.7	151.4
6	0.48	12.192	300	1335	100	445	103.0	153.3
8	0.52	13.208	300	1335	100	445	109.1	162.4
12	0.52	13.208	300	1335	100	445	111.8	166.4
24	0.64	16.256	300	1335	100	445	164.1	244.2

Cable Characteristics

Note: Part number rows in upper table directly correspond to cable characteristic rows in the same location of the lower table.

Multimode and Singlemode Armored

Indoor/Outdoor Armored Tight Buffered (Plenum)

(UL) OFCP c(UL) OFCP FT6

Optical Specifications

TIA/EIA-568-C.3 | ISO/IEC 11801, 2nd edition | Telcordia GR-409-CORE

Fiber type	Max. Attenuation (dB/km)		Min OFL Bandwidth (MHz-km)		Min EMBC Bandwidth (MHz-km)		Gb Ethernet distance (m)		10 Gb Ethernet distance (m)	
	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)
OM1	3.5	1.0	200	500	220	N/A	300	550	33	N/A
OM2	3.0	1.0	700	500	950	N/A	750	550	150	N/A
OM3	3.0	1.0	1500	500	2000	N/A	1000	550	300	N/A
OM4	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
OM5*	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)
OS2	0.5	0.5	N/A	N/A	N/A	N/A	> 25,000	> 40,000	10,000 - 25,000	40,000

Hitachi Cable America reserves the right to revise any specifications.

*OM5 optical fiber tested by glass manufacturer and exceeds the requirements of all applicable industry standards.


Cable Temperature Ranges

Storage: -40° to 70°C (-40° to 158°F)

Installation: 0°C to 60°C (32° to 140°F)

Operating: -40° to 70°C (-40° to 158°F)

Features

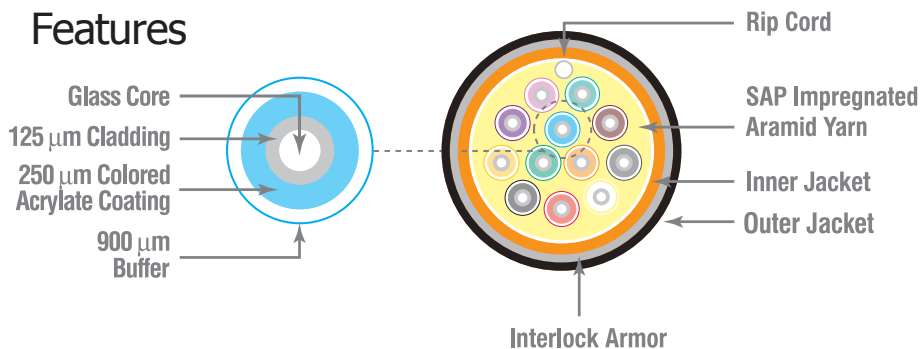

DIELECTRIC MATERIALS

PLENUM

Overall Jacket

Low-smoke, Flame-retardant thermoplastic



Diagram scale approx. 2:1

Mechanical Specifications

- Bend radius, no load
= 15x cable overall diameter
- Bend radius, load
= 20x cable overall diameter

plus
CORNING®
ClearCurve® Optical Fiber

FIBER



Tight Buffered

2 through 72 fibers

HITACHI

Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- All multimode, and singlemode cables (except OM1) utilize bend-insensitive optical fibers.
- UV and fungus resistant jacket.
- Tight buffered construction.
- Each fiber is color coded for easy identification.
- Dry, super absorbent polymers (SAPs) eliminate water migration in cable interstices.
- Suitable for lashed aerial, duct, underground conduit and indoor riser applications.
- 900um buffered design recommended for easy termination.
- Cables with more than 24 fibers have fibers segregated into 12-fiber sub-units.

Options

- Low smoke zero halogen (LSZH) available.
- Enhanced bend insensitive OS2 optical fiber is available (ITU-T G.657.B3 & G.657.A2).
- OM4+ optical fibers with extended 10 gigabit Ethernet distances are available.

Applications

- Applications include 10, 40 & 100 gigabit Ethernet, Fibre Channel, Video, Security, Automation.
- OM5 supports applications utilizing Short Wave Division Multiplexing (SWDM).

Standards

- TIA/EIA-568-C.3
- ISO/IEC 11801, 2nd edition
- Telcordia GR-409-CORE

Indoor/Outdoor Tight Buffered (Riser)

(UL) OFNR c(UL) OFNR FT4

PART NUMBERS BY FIBER COUNT

FIBERS	FIBERS PER TUBE	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM5	8.3 UM OS2
2	2	61345-2	61347-2	61348-2	61893-2	62766-2	61349-2
4	4	61345-4	61347-4	61348-4	61893-4	62766-4	61349-4
6	6	61345-6	61347-6	61348-6	61893-6	62766-6	61349-6
8	8	61345-8	61347-8	61348-8	61893-8	62766-8	61349-8
10	10	61345-10	61347-10	61348-10	61893-10	62766-10	61349-10
12	12	61345-12	61347-12	61348-12	61893-12	62766-12	61349-12
24	24	61345-24	61347-24	61348-24	61893-24	62766-24	61349-24
36	6	61380-36	61376-36	61523-36	61899-36	62767-36	61415-36
48	12	61495-48	61522-48	61524-48	61898-48	62768-48	61363-48
72	12	61495-72	61522--72	61524-72	61898-72	62768-72	61363-72

SPECIFICATIONS BY FIBER COUNT

				RECOMMENDED MAXIMUM LOADS					
				CABLE O.D.		INSTALL		OPERATION	
FIBERS	FIBERS/TUBE	TUBE LAYOUT	in.	mm	lbs-f	N	lbs-f	N	CABLE WEIGHT
2	2	x	.190	4.83	128	570	38	171	12.6
4	4	x	.190	4.83	128	570	38	171	13.9
6	6	x	.190	4.83	128	570	38	171	15.1
8	8	x	.230	5.84	160	712	48	214	20.0
10	10	x	.230	5.84	160	712	48	214	21.3
12	12	x	.230	5.84	160	712	48	214	22.5
24	24	x	.330	8.38	288	1282	86	385	50.2
36	6	6xCMS	.639	16.2	600	2670	200	890	159.2
48	12	4xCMS	.627	15.9	640	2849	192	855	135.1
72	12	6xCMS	.756	19.2	960	4273	288	1282	226.6

Cable Characteristics

Note: Part number rows in upper table directly correspond to cable characteristic rows in the same location of the lower table.

Indoor/Outdoor Tight Buffered (Riser)

(UL) OFNR c(UL) OFNR FT4

Optical Specifications

TIA/EIA-568-C.3 | ISO/IEC 11801, 2nd edition | Telcordia GR-409-CORE

Fiber type	Max. Attenuation (dB/km)		Min OFL Bandwidth (MHz-km)		Min EMBC Bandwidth (MHz-km)		Gb Ethernet distance (m)		10 Gb Ethernet distance (m)	
	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)
OM1	3.5	1.0	200	500	220	N/A	300	550	33	N/A
OM2	3.0	1.0	700	500	950	N/A	750	550	150	N/A
OM3	3.0	1.0	1500	500	2000	N/A	1000	550	300	N/A
OM4	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
OM5*	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)
OS2	0.5	0.5	N/A	N/A	N/A	N/A	> 25,000	> 40,000	10,000 - 25,000	40,000

Hitachi Cable America reserves the right to revise any specifications.

*OM5 optical fiber tested by glass manufacturer and exceeds the requirements of all applicable industry standards.

Cable Temperature Ranges

Storage: -40° to 70°C (-40° to 158°F)

Installation: -10° to 60°C (14° to 140°F)

Operating: -40° to 70°C (-40° to 158°F)

Features

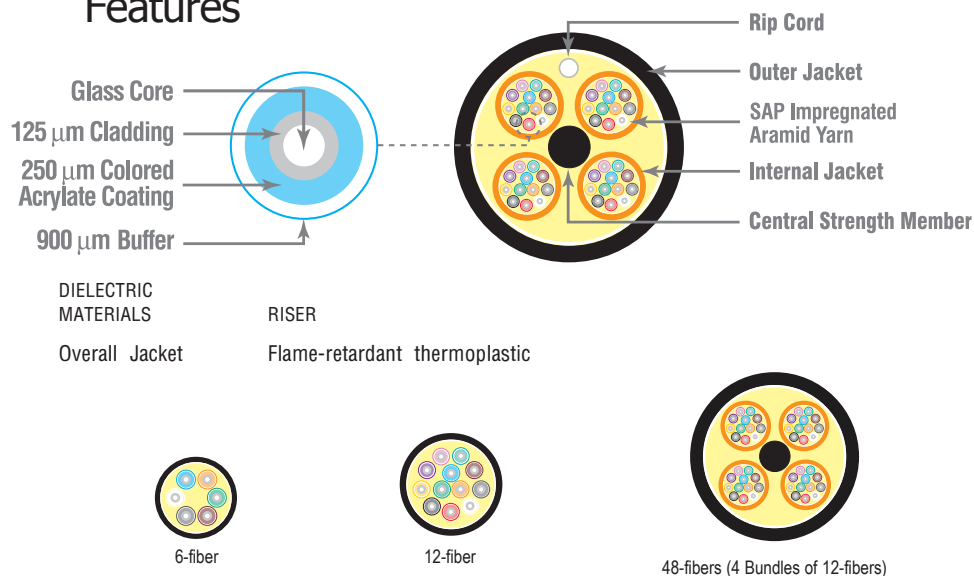


Diagram scale approx. 2:1

Mechanical Specifications

- Bend radius, no load
= 10x cable overall diameter
- Bend radius, load
= 20x cable overall diameter

plus
CORNING®
ClearCurve® Optical Fiber

FIBER



Tight Buffered

2 through 72 fibers

HITACHI

Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- All multimode, and singlemode cables (except OM1) utilize bend-insensitive optical fibers.
- UV and fungus resistant jacket.
- Tight buffered construction.
- Easy to strip and terminate.
- Each fiber is color coded for easy identification.
- Dry, super absorbent polymers (SAPs) eliminate water migration in cable interstices.
- Suitable for lashed aerial, duct, underground conduit and indoor plenum applications.
- 900um buffered design recommended for easy termination.
- Cables with more than 24 fibers have fibers segregated into 12-fiber sub-units.

Options

- OM4+ optical fibers with extended 10 gigabit Ethernet distances are available.
- Enhanced bend insensitive OS2 optical fiber is available (ITU-T G.657.B3 & G.657.A2).

Applications

- Applications include 10, 40 & 100 gigabit Ethernet, Fibre Channel, Video, Security, Automation.
- OM5 supports applications utilizing Short Wave Division Multiplexing (SWDM).

Standards

- TIA/EIA-568-C.3
- ISO/IEC 11801, 2nd edition
- Telcordia GR-409-CORE

Indoor/Outdoor Tight Buffered (Plenum)

(UL) OFNP c(UL) OFNP FT6

PART NUMBERS BY FIBER COUNT

FIBERS	FIBERS/TUBE	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM5	8.3 UM OS2
2	2	61460-2	61464-2	61468-2	61894-2	62769-2	61459-2
4	4	61460-4	61464-4	61468-4	61894-4	62769-4	61459-4
6	6	61460-6	61464-6	61468-6	61894-6	62769-6	61459-6
8	8	61460-8	61464-8	61468-8	61894-8	62769-8	61459-8
10	10	61460-10	61464-10	61468-10	61894-10	62769-10	61459-10
12	12	61460-12	61464-12	61468-12	61894-12	62769-12	61459-12
24	24	61460-24	61464-24	61468-24	61894-24	62769-24	61459-24
36	6	62178-36	62179-36	62180-36	62181-36	62770-36	62066-36
48	12	61979-48	61956-48	61959-48	61980-48	62771-48	61480-48
72	12	61979-72	61956-72	61959-72	61980-72	62771-72	61480-72

SPECIFICATIONS BY FIBER COUNT

FIBERS	FIBERS/TUBE	TUBE LAYOUT	CABLE O.D.		RECOMMENDED MAXIMUM LOADS				CABLE WEIGHT	
			INSTALL		OPERATION		lbs/1000 ft	kg/1000m	lbs/1000 ft	kg/1000m
			in.	mm	lbs-f	N	lbs-f	N		
2	2	x	.190	4.83	128	570	38	171	12.6	18.8
4	4	x	.190	4.83	128	570	38	171	13.9	20.7
6	6	x	.190	4.83	128	570	38	171	15.1	22.5
8	8	x	.230	5.84	160	712	48	214	20.0	29.8
10	10	x	.230	5.84	160	712	48	214	21.3	31.7
12	12	x	.230	5.84	160	712	48	214	22.5	33.5
24	24	x	.330	8.38	288	1282	86	385	50.2	74.8
36	6	6xC5M	.639	16.2	600	2670	200	890	159.2	236.9
48	12	4xC5M	.627	15.9	640	2849	192	855	135.1	201.1
72	12	6xC5M	.756	19.2	960	4273	288	1282	226.6	337.2

Cable Characteristics

Note: Part number rows in upper table directly correspond to cable characteristic rows in the same location of the lower table.

Indoor/Outdoor Tight Buffered (Plenum)

(UL) OFNP c(UL) OFNP FT6

Optical Specifications

TIA/EIA-568-C.3 | ISO/IEC 11801, 2nd edition | Telcordia GR-409-CORE

Fiber type	Max. Attenuation		Min OFL Bandwidth		Min EMBc Bandwidth		Gb Ethernet distance		10 Gb Ethernet distance	
	(dB/km)		(MHz-km)		(MHz-km)		(m)		(m)	
	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)
OM1	3.5	1.0	200	500	220	N/A	300	550	33	N/A
OM2	3.0	1.0	700	500	950	N/A	750	550	150	N/A
OM3	3.0	1.0	1500	500	2000	N/A	1000	550	300	N/A
OM4	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
OM5*	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)
OS2	0.5	0.5	N/A	N/A	N/A	N/A	> 25,000	> 40,000	10,000 - 25,000	40,000

Hitachi Cable America reserves the right to revise any specifications.

*OM5 optical fiber tested by glass manufacturer and exceeds the requirements of all applicable industry standards.


Cable Temperature Ranges

Storage: -40° to 70°C (-40° to 158°F)

Installation: 0°C to 60°C (32° to 140°F)

Operating: -40° to 70°C (-40° to 158°F)

Features

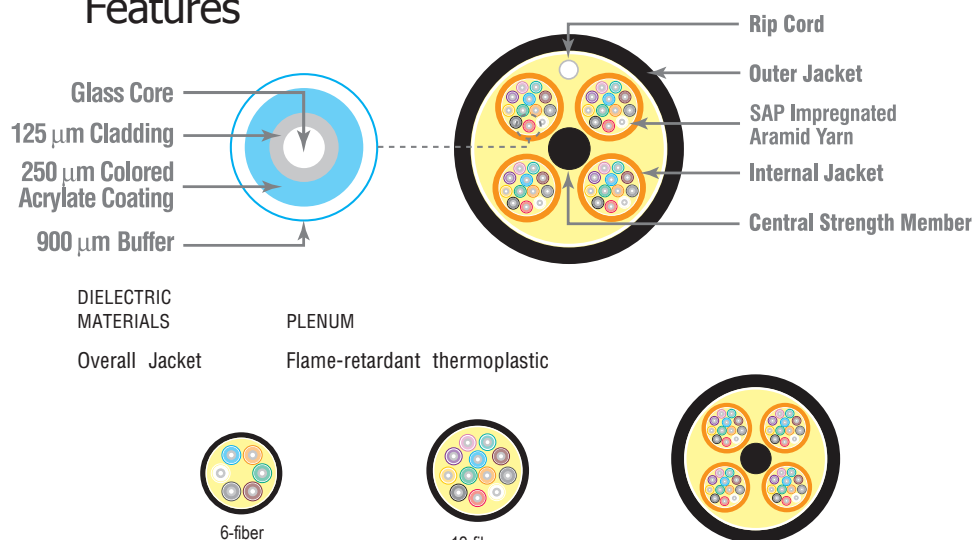

Mechanical Specifications

- Bend radius, no load = 10x cable overall diameter
- Bend radius, load = 20x cable overall diameter

plus
CORNING®
ClearCurve® Optical Fiber

FIBER



Loose Tube

12 through 144 fibers

HITACHI

Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- All multimode, and singlemode cables (except OM1) utilize bend-insensitive optical fibers.
- UV and fungus resistant jacket.
- Gel filled loose tubes provide protection against water penetration.
- Dry, super absorbent polymers (SAPs) eliminate water migration in cable interstices.
- Suitable for lashed aerial, duct, and underground conduit.
- SM Fiber optic cable is RDUP approved.

Options

- Other configurations and fiber counts available.
- Enhanced bend insensitive OS2 optical fiber is available (ITU-T G.657.B3 & G.657.A2).
- Dual jacket constructions available.
- Low smoke zero halogen (LSZH) available.
- Up to 432 fibers available.
- OM4+ optical fibers with extended 10 gigabit Ethernet distances are available.

Applications

- Applications include 10, 40 & 100 gigabit Ethernet, Fibre Channel, Video, Security and Automation.

Standards

- TIA/EIA-568-C.3
- ISO/IEC 11801, 2nd edition
- Telcordia GR-20-CORE

Outdoor (Outside Plant) Loose Tube

PART NUMBERS BY FIBER COUNT

FIBERS	FIBERS/TUBE	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM5	8.3 UM OS2
18	6	60085-18	60087-18	60940-18	61907-18	62773-18	60089-18
24	6	60085-24	60087-24	60940-24	61907-24	62773-24	60089-24
12	12	60086-12	60088-12	60943-12	61908-12	62774-12	60090-12
24	12	60086-24	60088-24	60943-24	61908-24	62774-24	60090-24
36	12	60086-36	60088-36	60943-36	61908-36	62774-36	60090-36
48	12	60086-48	60088-48	60943-48	61908-48	62774-48	60090-48
60	12	60086-60	60088-60	60943-60	61908-60	62774-60	60090-60
72	12	60086-72	60088-72	60943-72	61908-72	62774-72	60090-72
84	12	60086-84	60088-84	60943-84	61908-84	62774-84	60090-84
96	12	60086-96	60088-96	60943-96	61908-96	62774-96	60090-96
108	12	60086-108	60088-108	60943-108	61908-108	62774-108	60090-108
120	12	60086-120	60088-120	60943-120	61908-120	62774-120	60090-120
132	12	60086-132	60088-132	60943-132	61908-132	62774-132	60090-132
144	12	60086-144	60088-144	60943-144	61908-144	62774-144	60090-144

SPECIFICATIONS BY FIBER COUNT

FIBERS	FIBERS/TUBE	TUBE LAYOUT	RECOMMENDED MAXIMUM LOADS							
			CABLE O.D.		INSTALL		OPERATION		CABLE WEIGHT	
			in.	mm	lbs-f	N	lbs-f	N	lbs/1000 ft	kg/1000m
18	6	5XCSCM	.463	11.7	600	2670	180	800	56.0	83.4
24	6	5XCSCM	.463	11.7	600	2670	180	800	60.0	89.4
12	12	5XCSCM	.463	11.7	600	2670	180	800	62.9	93.7
24	12	5XCSCM	.463	11.7	600	2670	180	800	64.2	95.6
36	12	5XCSCM	.463	11.7	600	2670	180	800	65.1	97.0
48	12	5XCSCM	.463	11.7	600	2670	180	800	66.2	98.6
60	12	5XCSCM	.463	11.7	600	2670	180	800	67.0	99.8
72	12	6XCSCM	.493	12.5	600	2670	180	800	76.0	113.2
84	12	7XCSCM	.552	14.0	600	2670	180	800	93.0	138.6
96	12	8XCSCM	.581	14.8	600	2670	180	800	106.0	157.9
108	12	9XCSCM	.620	15.7	600	2670	180	800	120.0	178.8
120	12	10XCSCM	.649	16.5	600	2670	180	800	137.0	204.1
132	12	11XCSCM	.683	17.3	600	2670	180	800	153.0	228.0
144	12	12XCSCM	.720	18.3	600	2670	180	800	171.0	255.0

Cable Characteristics

Note: Part number rows in upper table directly correspond to cable characteristic rows in the same location of the lower table.

Outdoor (Outside Plant) Loose Tube

Optical Specifications

TIA/EIA-568-C.3 | ISO/IEC 11801, 2nd edition | Telcordia GR-409-CORE

Fiber type	Max. Attenuation (dB/km)		Min OFL Bandwidth (MHz-km)		Min EMBc Bandwidth (MHz-km)		Gb Ethernet distance (m)		10 Gb Ethernet distance (m)	
	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)
OM1	3.5	1.0	200	500	220	N/A	300	550	33	N/A
OM2	3.0	1.0	700	500	950	N/A	750	550	150	N/A
OM3	3.0	1.0	1500	500	2000	N/A	1000	550	300	N/A
OM4	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
OM5*	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)
OS2	0.4	0.3	N/A	N/A	N/A	N/A	> 25,000	> 40,000	10,000 - 25,000	40,000

Hitachi Cable America reserves the right to revise any specifications.

*OM5 optical fiber tested by glass manufacturer and exceeds the requirements of all applicable industry standards.

Cable Temperature Ranges

Storage: -40° to 70°C (-40° to 158°F)

Installation: -30° to 60°C (-22° to 140°F)

Operating: -40° to 70°C (-40° to 158°F)

Features

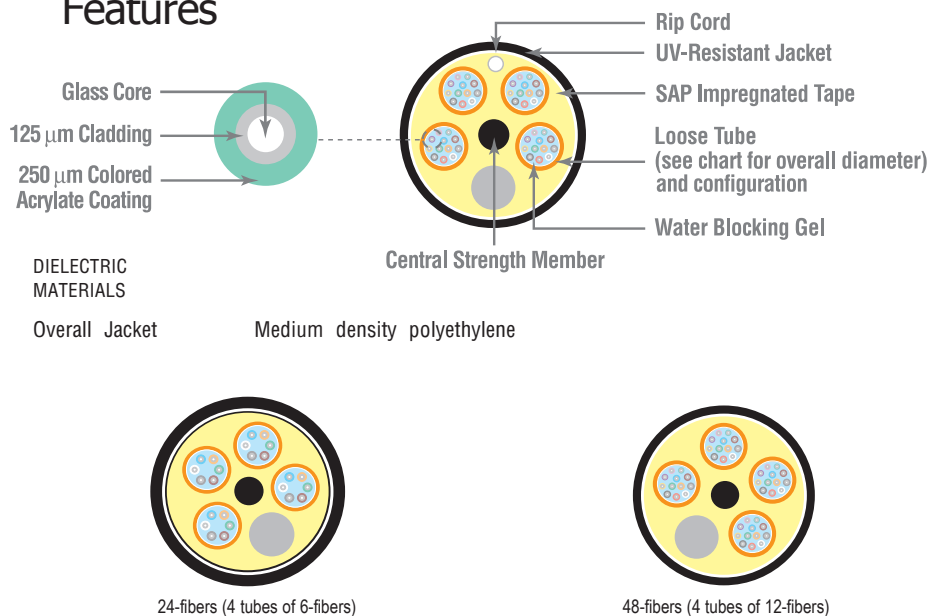


Diagram scale approx. 1:1

Mechanical Specifications

Bend radius

- No load = 10x cable overall diameter
- Load = 20x cable overall diameter

Loose Tube Diameter

	in.	mm
2-12 fibers per tube	.110	2.8

plus
CORNING®
ClearCurve® Optical Fiber



Loose Tube

12 through 144 fibers

HITACHI

Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- All multimode, and singlemode cables (except OM1) utilize bend-insensitive optical fibers.
- Rugged corrugated steel armor provides extra crush-resistance and rodent protection.
- UV and fungus resistant jacket.
- Gel filled loose tube provides protection against water penetration.
- Dry, super absorbent polymers (SAPs) eliminate water migration in cable interstices.
- Suitable for lashed aerial, duct, underground conduit and direct bury applications.

Options

- Other configurations and fiber counts available.
- Enhanced bend insensitive OS2 optical fiber is available (ITU-T G.657.B3 & G.657.A2).
- Dual jacket constructions available.
- Low smoke zero halogen (LSZH) available.
- OM4+ optical fibers with extended 10 gigabit Ethernet distances are available.

Applications

- Applications include 10, 40 & 100 gigabit Ethernet, Fibre Channel, Video, Security and Automation.

Standards

- TIA/EIA-568-C.3
- ISO/IEC 11801, 2nd edition
- Telcordia GR-20-CORE

Outdoor (Outside Plant) Armored

PART NUMBERS BY FIBER COUNT

FIBERS	FIBERS/TUBE	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	8.3 UM OS2
24	2	60346-24	60932-24	60944-24	61909-24	60954-24
48	4	60345-48	60933-48	60945-48	61910-48	60356-48
48	6	60097-48	60934-48	60946-48	61911-48	60101-48
12	12	60098-12	60937-12	61497-12	61912-12	60102-12
24	12	60098-24	60937-24	61497-24	61912-24	60102-24
48	12	60098-48	60937-48	61497-48	61912-48	60102-48
144	12	60098-144	60937-144	61497-144	61912-144	60102-144

SPECIFICATIONS BY FIBER COUNT

					RECOMMENDED MAXIMUM LOADS					
FIBERS	FIBERS/ TUBE	TUBE LAYOUT	CABLE O.D.		INSTALL		OPERATION		CABLE WEIGHT	
			in.	mm	lbs-f	N	lbs-f	N	lbs/1000 ft	kg/1000m
24	2	12xC5M	0.748	19.0	600	2670	180	800	228.0	339.7
48	4	12xC5M	0.748	19.0	600	2670	180	800	229.0	341.2
48	6	8XC5M	0.613	15.6	600	2670	180	800	147.0	219.0
12	12	5XC5M	0.508	13.1	600	2670	180	800	112.6	167.7
24	12	5XC5M	0.508	13.1	600	2670	180	800	114.7	170.8
48	12	5XC5M	0.508	13.1	600	2670	180	800	115.5	172.0
144	12	12xC5M	0.768	19.5	600	2670	180	800	241.0	359.1

Cable Characteristics

Note: Part number rows in upper table directly correspond to cable characteristic rows in the same location of the lower table.

Outdoor (Outside Plant) Armored

Optical Specifications

TIA/EIA-568-C.3 | ISO/IEC 11801, 2nd edition | Telcordia GR-409-CORE

Fiber type	Max. Attenuation (dB/km)		Min OFL Bandwidth (MHz-km)		Min EMBc Bandwidth (MHz-km)		Gb Ethernet distance (m)		10 Gb Ethernet distance (m)	
	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)
OM1	3.5	1.0	200	500	220	N/A	300	550	33	N/A
OM2	3.0	1.0	700	500	950	N/A	750	550	150	N/A
OM3	3.0	1.0	1500	500	2000	N/A	1000	550	300	N/A
OM4	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
	1310nm (SM)		1550nm (SM)		1310nm (SM)		1550nm (SM)		1310nm (SM)	
	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)
OS2	0.4	0.3	N/A	N/A	N/A	N/A	> 25,000	> 40,000	10,000 - 25,000	40,000

Hitachi Cable America reserves the right to revise any specifications.

*OM5 optical fiber tested by glass manufacturer and exceeds the requirements of all applicable industry standards.

Cable Temperature Ranges

Storage: -40° to 70°C (-40° to 158°F)

Installation: -30° to 60°C (-22° to 140°F)

Operating: -40° to 70°C (-40° to 158°F)

Mechanical Specifications

Bend radius

■ No load = 10x cable overall diameter


■ Load = 20x cable overall diameter

Loose Tube Diameter

2-12 fibers per tube .110 in. 2.8 mm

plus
CORNING®
ClearCurve® Optical Fiber

Features

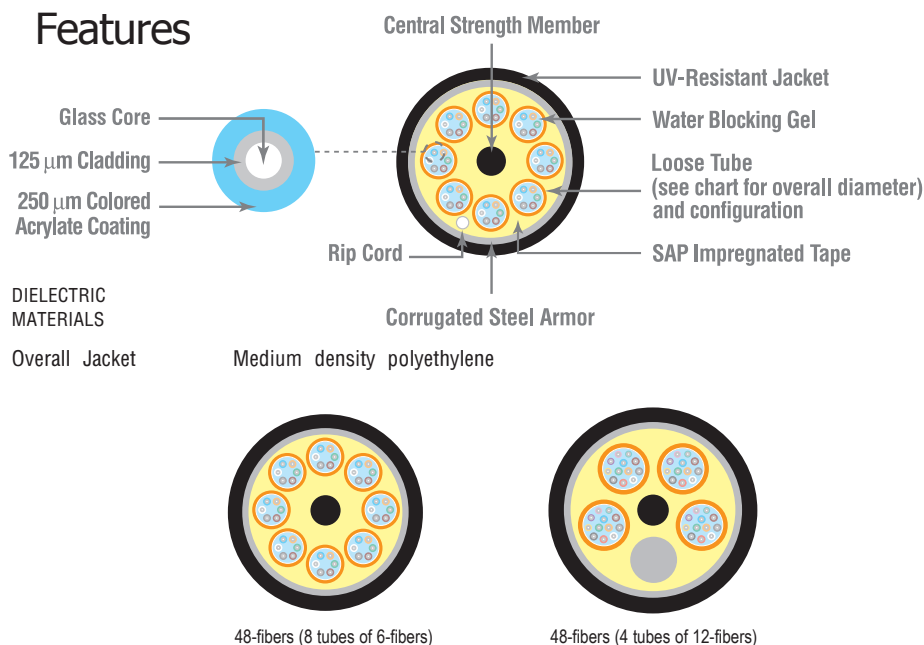

Color Code Chart

High Pair Count Cables

When cables contain more than one pair group, different color binder tapes are used to differentiate the 25 pair groups.

Primary Insulation Color Coding

Hitachi Cable uses a co-extruded color stripe to mark insulated conductors. This process provides several benefits:

- Marking durability is insured for the life of the cable.
- Electrical characteristics of the marking stripe match the insulation.
- Avoids highly toxic ink systems that are required to bond to some materials.

Pair #	Copper Conductor Color Combinations
1	White/Blue - Blue/White
2	White/Orange - Orange/White
3	White/Green - Green/White
4	White/Brown - Brown/White
5	White/Gray - Gray/White
6	Red/Blue - Blue/Red
7	Red/Orange - Orange/Red
8	Red/Green - Green/Red
9	Red/Brown - Brown/Red
10	Red/Gray - Gray/Red
11	Black/Blue - Blue/Black
12	Black/Orange - Orange/Black
13	Black/Green - Green/Black
14	Black/Brown - Brown/Black
15	Black/Gray - Gray/Black
16	Yellow/Blue - Blue/Yellow
17	Yellow/Orange - Orange/Yellow
18	Yellow/Green - Green/Yellow
19	Yellow/Brown - Brown/Yellow
20	Yellow/Gray - Gray/Yellow
21	Violet/Blue - Blue/Violet
22	Violet/Orange - Orange/Violet
23	Violet/Green - Green/Violet
24	Violet/Brown - Brown/Violet
25	Violet/Gray - Gray/Violet

Fiber #	Fiber/Buffer Color
1	Blue
2	Orange
3	Green
4	Brown
5	Gray
6	White
7	Red
8	Black
9	Yellow
10	Violet
11	Pink
12	Aqua
13	Olive
14	Magenta
15	Tan
16	Lime


Note:

To differentiate bundles in cables with greater than 12 strands, polyester binders or buffer tubes (depending on the construction) are used. Those binders or buffer tubes will incorporate the same color code found in the chart above. The color code is part of the TIA-598 standard. For indoor, multiunit fiber optic cables, subunits will be numbered for identification.

Code References

National Electric Code Cable Substitution

Hierarchy

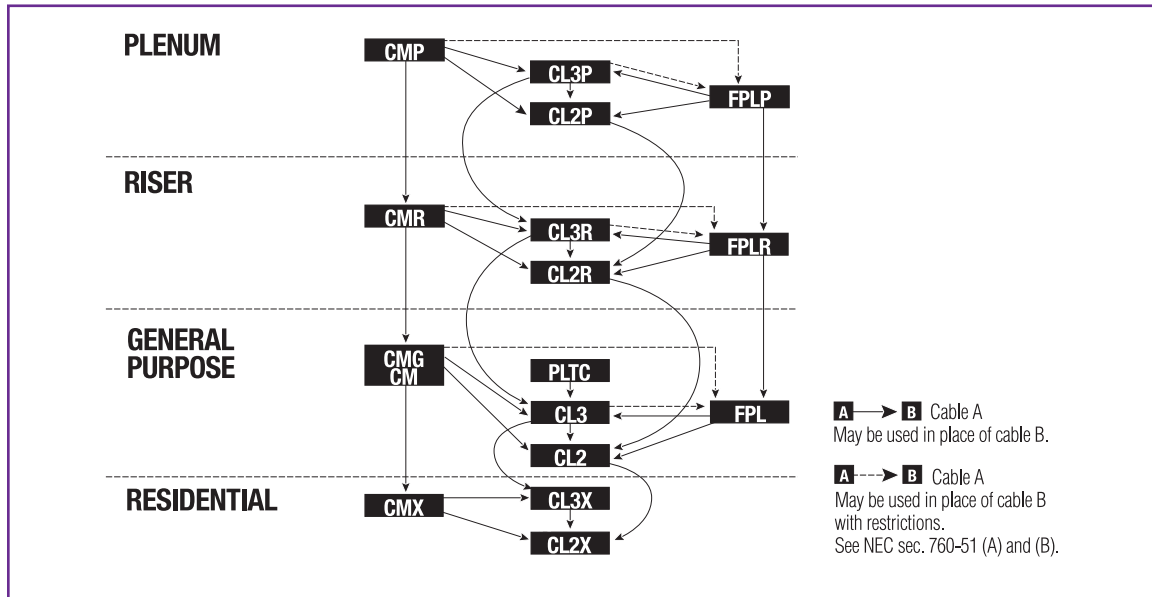

NEC and CSA Fire Resistance

Levels

Fire Resistance Level	Test Requirement	NEC 725	NEC 760	NEC 800
(Highest) Plenum Cables	UL-910 (Steiner Tunnel) CSA-FT6 (Steiner Tunnel)	CL3P CL2P	FPLP	CMP
Riser Cables Multiple Floors	UL-1666 (Vertical Shaft) CSA-FT4, CMG (Vertical Tray)	CL3R CL2R	FPLR	CMR
General Purpose Cables	UL-1581 (Vertical Tray) CSA-FT4, CMG (Vertical Tray)	CL3 CL2	FPL	CM
(Lowest) Residential Cables Restricted Use	UL-1581 VW-1 CSA-FT1	CL3X CL2X		CMX

Notes

- 1 Cables with a higher fire resistance level may be substituted for those with a lower fire resistance level, except that FT6 must also be marked FT4 for FT4 applications.
- 2 Cables rated CM may be used in runs penetrating one floor. (NEC 800-53)

National Electric Code and NEC are registered trademarks of the National Fire Protection Association, Inc. Quincy, MA.

Applications

Copper

Applications Support Matrix

	Category 3	Category 5e	Category 6	Category 6A	Category 7 & 7A
Voice	■	■	■	■	■
T1 Fractional	■	■	■	■	■
IBM Type 3 - 1 Mbps	■	■	■	■	■
4/16 Mbps Token Ring	■	■	■	■	■
10BASE-T Ethernet	■	■	■	■	■
100BASE-T4 Fast Ethernet	■	■	■	■	■
25.6 Mbps ATM	■	■	■	■	■
100 VG - Any LAN	■	■	■	■	■
All other applications developed to operate over Category 3 or class C cabling	■	■	■	■	■
100 Mbps TP-PMD		■	■	■	■
155 Mbps ATM		■	■	■	■
270 Mbps digital video		■	■	■	■
Broadband video		■	■	■	■
100BASE-TX Fast Ethernet		■	■	■	■
1000BASE-T Gigabit Ethernet		■	■	■	■
All other applications developed to operate over Category 5e or class D cabling		■	■	■	■
2.5 Gbase-T Ethernet			■	■	■
5.0 GBase-T Ethernet			■	■	■
1000 Mbps ATM (CBIG)			■	■	■
All other applications developed to operate over Category 6 or Class E cabling			■	■	■
10GBASE-T Ethernet			■ ²	■	■
All other applications developed to operate over Category 6A or Class EA cabling				■	■
All other applications developed to operate over Category 7 or 7A or class C or CA cabling					■

Guaranteed Category 5e support of IEEE 1000BASE-T (Gigabit Ethernet) application:

Hitachi Cable America Inc.'s Category 5e cables exceed all of the requirements specified by IEEE 802.3ab for support of Gigabit Ethernet (1000BASE-T) operation over twisted-pair cabling. Furthermore, Hitachi Cable guarantees that all of our Category 5e and higher rated cables will support the 1000BASE-T application.

To demonstrate our compliance, Hitachi Cable's products have been extensively tested for IEEE 1000BASE-T throughput at the University of New Hampshire's Interoperability Lab and found to fully support the IEEE 1000BASE-T Gigabit Ethernet application.

¹ Cat 7 Cable standard has not yet been ratified.

² Per TSB-155, Category 6 cable may accommodate 10 gigabit Ethernet up to 55 meters in a channel. Mitigation to achieve 55m may be required. Hitachi Cable's 10G-RD™ Enhanced Category 6 provides guaranteed 10 gigabit support up to 100 meters in a channel.

Applications

Fiber

Applications Support Matrix

Application	Standard	Wavelength	Transmission	Fiber type	Length (m)
	1000BASE-LX	1300nm	Serialized	OM1	550
				OM2	550
				SM	>2,000
	1000BASE-SX	850nm	Serialized	OM1	220
				OM2	550
				OM3	>550
	10GBASE-SR	850nm	Serialized	OM1	33
				OM2	82
				OM3	300
				OM4	550
	10GBASE-LR	1310nm	Serialized	SM	10,000 - 25,000
	10GBASE-LRM	1310nm	Serialized	OM1	220
				OM3	260
	10GBASE-ER	1550nm	Serialized	SM	40,000
	10GBASE-LX4	1300nm	WDM	MM	240-300
				SM	10,000
	40GBASE-SR4	850nm	Parallel Optics	OM3	100
				OM4	125
	40GBASE-LR4	1310nm	WDM	SM	10,000
	100GBASE-SR10	850nm	Parallel Optics	OM3	100
				OM4	125
	100GBASE-LR4	1310nm	WDM	SM	10,000
	100GBASE-ER4	1310nm	WDM	SM	40,000
	Infiniband SDR	850nm	Parallel Optics	OM1	75
				OM2	125
				OM3	200
	Infiniband DDR	850nm	Parallel Optics	OM1	50
				OM2	75
				OM3	150
	Infiniband 4x-LX	call	call	OS2	10,000
	ITU-T G.957 STM-1, -4 & -16	1550nm	WDM	OS2	2,000
	ITU-T G.957 STM-1 & -4				15,000
	ITU-T G.957 STM-1		Serialized		40,000
	Fibre Channel, 2 Gig	850nm	Serialized	OM2	300
				OM3	500
	Fibre Channel, 4 Gig	850nm	Serialized	OM2	150
				OM3	270
	Fibre Channel 1, 2 & 4 Gig	1300nm	Serialized	OS2	10,000

Standards

All of Hitachi Cable's products are fully compliant to the requirements of applicable national and international structured cabling standards.

ANSI/TIA-568.O-D “Generic Telecommunications Cabling Standard (2015)” This standard, in part, supersedes TIA/EIA-568-B.1 and its addenda. This standard incorporates the following standards: TIA/EIA-568-B.1-1, TIA/EIA-568-B.1-2, TIA/EIA-568-B.1-3, TIA/EIA-568-B.1-7, TIA/EIA TSB125, TIA TSB140, TIA TSB153. This document specifies copper and fiber optic cabling requirements and test methods that will support a multi-product, multi-vendor environment.

ANSI/TIA-568.I-D “Commercial Building Telecommunications Cabling Standard (2015)” This standard, in part, supersedes TIA/EIA-568-B.1 and its addenda. This standard incorporates content from ANSI/TIA-568-B.1-4, Addendum 4, as well as ANSI/TIA-568-B.1-5, Addendum 5.

ANSI/TIA-568-C.2 “Balanced Twisted Pair Telecommunications Cabling Components Standard (2009)” This standard supersedes ANSI/TIA/EIA-568B.2. This document specifies the performance of copper cables, patch cords, and connectors, in addition to the transmission, system models, and the measurement procedures needed for verification of balanced twisted pair cabling performance. This standard incorporates content from the following ANSI/TIA/EIA standards: 568-B.2, 568-B.2-1, 568-B.2-2, 568-B.2-3, 568-B.2-4, 568-B.2-5, 568-B.2-6 and ANSI/TIA standards 568-B.2-7, 568-B.2-9, 568-B.2-10 and 568-B.2-11.

ANSI/TIA-568-C.3 “Optical Fiber Cabling Components Standard (2008)” This document specifies the performance of the cables, patch cords, and connector used in fiber optic cable systems. This standard replaces ANSI/TIA/EIA-568-B.3 and ANSI/TIA/EIA-568-B.3-1.

ANSI/TIA-569-D “Commercial Building Standard for Telecommunications Pathways and Spaces (2015)” This document describes recognized cabling locations both within and between buildings. Included are the pathways in which telecommunications media are placed and the rooms and areas associated with the building used to terminate media and install telecommunications equipment.

ANSI/TIA-570-C “Residential Telecommunications Cabling Standard (2012)” The purpose of this document is to standardize requirements for residential telecommunications cabling. The requirements are intended to be implemented for new construction, additions and remodeled single and multi-tenant residential buildings.

ANSI/TIA-606-B “Administration Standard for Commercial Telecommunications Infrastructure (2012)” This standard provides guidelines and choices of classes of administration for maintaining telecommunications infrastructure.

ANSI/TIA-607-C “Commercial Building Grounding (Earthing) and Bonding Requirements for Telecommunications (2001)” This purpose of this standard is to enable the planning, design, and installation of telecommunications grounding and bonding systems within a building with or without prior knowledge of the telecommunications systems that will subsequently be installed.

ANSI/TIA-758-B “Customer-Owned Outside Plant Telecommunications Infrastructure (2012)” This standard provides requirements used in the design of the cabling, pathways and spaces used between buildings or points in a customer-owned campus environment.

ANSI/TIA-862-B “Structured Cabling Initiative Standard for Intelligent Building Systems (2016)” This standard specifies a generic cabling system for building automation systems (BAS) used in commercial systems.

ISO/IEC 11801, 2nd edition “Generic cabling for Customer Premises (2002)” This standard is the international counterpart to the TIA/EIA-568 family of standards. It contains requirements for balanced twisted-pair and fiber optic components and cabling systems.

TSB 155 “Guidelines for the Assessment of Mitigation of Installed Category 6 Cabling to Support 10GBASE-T” This document specifies the requirements for Category 6 UTP and Sctp (FTP) in regards to accommodating 10GBASE-T Ethernet.


ANSI/TIA-942-A “Telecommunications Infrastructure Standard for Data Centers” This standard establishes the minimum requirements for telecommunications infrastructure associated with data centers and computer rooms.

ANSI/TIA-1005-A “Telecommunications Infrastructure Standard for Industrial Premises” This standard specifies infrastructure requirements within and between industrial buildings.

Configurations


Channel Configuration

The channel test configuration is to be used by system designers and users of data communications systems to verify the performance of the overall channel. The channel includes up to 90 m (295 ft) of horizontal cable, a work area equipment cord, a telecommunications outlet/connector, an optional transition/consolidation connector, and two connections in the telecommunications room. The total length of equipment cords, patch cords or jumpers and work area cords shall not exceed 10 m (33 ft). Note that the connections to the equipment at each end of the channel are not included in the channel definition.

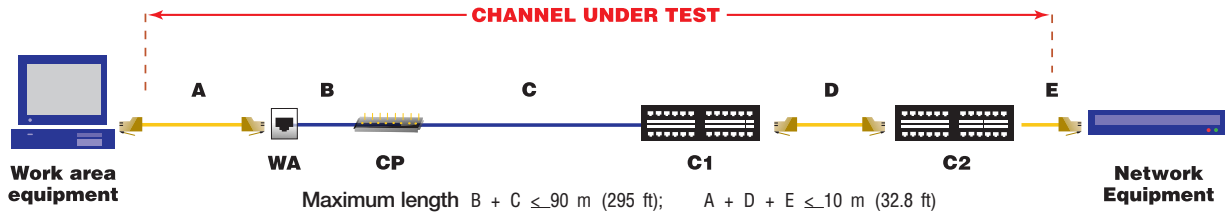

Permanent Link

The permanent link test configuration is to be used by installers and users of data telecommunications systems to verify the performance of permanently installed cabling. The permanent link consists of up to 90 m (295 ft) of horizontal cabling and one connection at each end and may also include an optional transition/consolidation point connection. Note that the permanent link excludes both the cable portion of the field test instrument cord and the connection to the field test instrument.

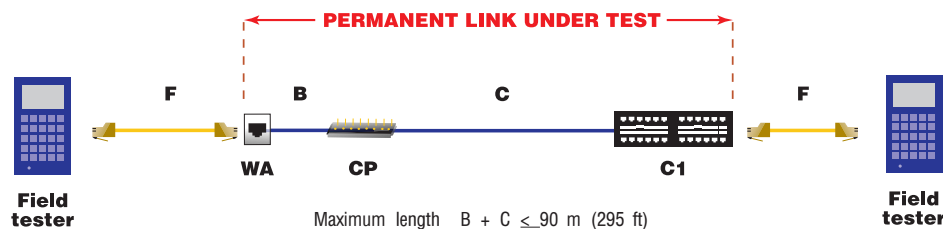

Cables and cords

- A = Work area cord
- B = Optional transition cabling
- C = Horizontal cabling
- D = Patch cord or jumper cable
- E = Telecommunications room equipment cord
- F = Test equipment cord

Connecting Hardware

- WA = Telecommunications outlet/connector
- CP = Optional transition/consolidation point connector
- C1, C2 = Horizontal cross-connect or interconnect

Recommended Backbone Fiber Lengths

The table below is for network design purposes and can be used for establishing the maximum fiber optic cable lengths based on the fiber optic glass type and the maximum data rate at that distance. The maximum lengths are guidelines only. The number of fiber optic strands used and the type of electronics and their transmit speeds will determine the actual maximum performance length.

Backbone Fiber Type	Recommended Backbone Max. Length	Max. Data Rates
OM1	2000 m (6562 ft.)	155 Mb/s
OM2	550 m (1804 ft.)	1 GB/s
OM3	300 m (984 ft.)	10 GB/s, 100 GB/s
OM4	550 m (1804 ft.)	10 GB/s, 100 GB/s
OS2	10,000 m (32,808 ft.)	100 GB/s

Glossary

Acronyms & Abbreviations

ACR: Attenuation-to-crosstalk ratio
ACRF: Attenuation-to-crosstalk ratio far-end
ANSI: American National Standards Institute
ASTM: American Society for Testing and Materials
ATM: asynchronous transfer mode
AWG: American Wire Gauge
BELLCORE: Bell Communications Research
BICSI: Building Industry Consulting Services International
CATV: community antenna television
EIA: Electronic Industries Alliance
ELFEXT: equal level far-end crosstalk
EMC: electromagnetic compatibility
EMI: electromagnetic interference
FCC: Federal Communications Commission
FDDI: fiber distributed data interface
FEXT: far-end crosstalk
FOCIS: Fiber Optic Connector Intermateability Standard
F/UTP: foil over unshielded twisted pairs
IEC: International Electrotechnical Commission
IEEE: The Institute of Electrical and Electronics Engineers
ILD: Insertion loss deviation
LCL: Longitudinal conversion loss
LCTL: Longitudinal conversion transfer loss
ISDN: integrated services digital network
ISO: International Organization for Standardization
LAN: local area network
LED: light emitting diode
Mb/s: megabits per second
MUTOA: multi-user telecommunications outlet assembly
NEC®: National Electrical Code®
NEMA: National Electrical Manufacturers Association
NESC®: National Electrical Safety Code®
NEXT: near-end crosstalk
NFPA: National Fire Protection Association
NVP: nominal velocity of propagation
PSACR: power sum attenuation-to-crosstalk ratio
PSACRF: power sum attenuation-to-crosstalk ratio far-end
PSELFEXT: power sum equal level far-end crosstalk
PSFEXT: power sum far-end crosstalk
PSNEXT: power sum near-end crosstalk
SFTP: braided shield over pairs in foil
STP: shielded twisted-pair
TIA: Telecommunications Industry Association
TSB: Telecommunications System Bulletin
UL: Underwriters Laboratories
UTP: unshielded twisted-pair

adapter (copper): A device that enables any or all of the following: (1) different sizes or types of plugs to mate with one another or to fit into a telecommunications outlet, (2) the rearrangement of leads, (3) large cables with numerous wires to fan out into smaller groups of wires, and (4) interconnection between cables.

adapter (fiber optic): optical fiber duplex: A mechanical device designed to align and join two duplex optical fiber connectors (plugs) to form an optical duplex connection.

administration: The method for labeling, identification, documentation and usage needed to implement moves, additions and changes of the telecommunications infrastructure.

attenuation:
(see insertion loss)

attenuation-to-crosstalk ratio: A ratio, expressed in dB, determined by subtracting the insertion loss from the near-end crosstalk loss.

attenuation-to-crosstalk ratio far-end: replaces ELFEXT. A measure of the unwanted signal coupling from a transmitter at the near-end into another pair measured at the far-end, and relative to the received signal level.

backbone cable: A cable that runs between telecommunications rooms, or floor distribution terminals, the entrance facilities, and the equipment rooms within or between buildings.

balance: Balance is the ratio of the differential signal output at either end of any pair to a common mode signal input, at either end of the same or a different pair, and vice versa, under

specified termination conditions.

bonding: The permanent joining of metallic parts to form an electrically conductive path that will assure electrical continuity and the capacity to conduct safely any current likely to be imposed on it.

bundled cable: An assembly of two or more cables continuously bound together to form a single unit.

cable: An assembly of one or more insulated conductors or optical fibers, within an enveloping sheath.

cable run: A length of installed media, which may include other components along its path.

cable sheath: A covering over the optical fiber or conductor assembly that may include one or more metallic members, strength members, or jackets.

cabling: A combination of all cables, jumpers, cords, and connecting hardware.

campus: The buildings and grounds having legal contiguous interconnection.

centralized cabling: A cabling configuration from the work area to a centralized cross-connect using pull through cables, an interconnect, or splice in the telecommunications room.

channel: The end-to-end transmission path between two points at which application-specific equipment is connected.

connecting hardware: A device providing mechanical cable terminations.

connector, small form factor: An optical fiber duplex

Glossary

connector with a size approximating that of an 8-position modular outlet/connector typically used for terminating 4-pair copper cable.

cord (telecommunications): A cable using stranded conductors for flexibility, as in distribution cords or line cords.

cross-connect:
A facility enabling the termination of cable elements and their interconnection or cross-connection.

cross-connection:
A connection scheme between cabling runs, subsystems, and equipment using patch cords or jumpers that attach to connecting hardware on each end.

decibels (dB):
A logarithmic unit that is used to describe a wide range of differences in signal voltage or power levels.

delay skew: The difference in propagation delay between any two pairs within the same cable sheath.

demarcation point:
A point where the operational control or ownership changes.

drain wire: A non-insulated conductor placed in electrical contact with a shield.

electromagnetic interference: Radiated or conducted electromagnetic energy that has an undesirable effect on electronic equipment or signal transmissions.

entrance facility (telecommunications): An entrance to a building for both public and private network service cables (including wireless) including the entrance point of the building and continuing to the entrance room or space.

entrance point (telecommunications): The point of emergence for telecommuni-

cations cabling through an exterior wall, a floor, or from a conduit.

entrance room or space (telecommunications): A space in which the joining of inter or intra building telecommunications backbone facilities takes place.

equal level far-end crosstalk: (obsolete) A measure of the unwanted signal coupling from a transmitter at the near-end into another pair measured at the far-end, and relative to the received signal level.

equipment cable, cord: A cable or cable assembly used to connect telecommunications equipment to horizontal or backbone cabling.

equipment room (telecommunications): An environmentally controlled centralized space for telecommunications equipment that usually houses a main or intermediate cross-connect.

far-end crosstalk loss: A measure of the unwanted signal coupling from a transmitter at the near end into another pair measured at the far end.

fiber optic: See optical fiber.

ground: A conducting connection, whether intentional or accidental, between an electrical circuit (e.g., telecommunications) or equipment and the earth, or to some conducting body that serves in place of earth.

high-order mode transient losses: Losses in power caused by the attenuation in the cladding of multimode optical fiber.

horizontal cabling: (1) The cabling between and including the telecommunications outlet/connector and the horizontal

cross-connect.
(2) The cabling between and including the building automation system outlet or the first mechanical termination of the horizontal connection point and the horizontal cross-connect.

horizontal cross-connect:
A cross-connect of horizontal cabling to other cabling, e.g., horizontal, backbone, and equipment.

hybrid cable: An assembly of two or more cables, of the same or different types or categories, covered by one overall sheath.

hybrid optical fiber cable:
An optical fiber cable containing two or more fiber types (e.g., multimode and single-mode).


infrastructure (telecommunications): A collection of those telecommunications components, excluding equipment, that together provide the basic support for the distribution of all information within a building or campus.

insertion loss: The signal loss resulting from the insertion of a component, or link, or channel, between a transmitter and receiver.

insertion loss deviation:
The difference between the actual insertion loss as measured on a permanent link or channel and the insertion loss as determined by adding the component losses.

interconnection:
A connection scheme that employs connecting hardware for the direct connection of a cable to another cable without a patch cord or jumper.

intermediate cross-connect: A cross-connect between first level and second level backbone cabling.

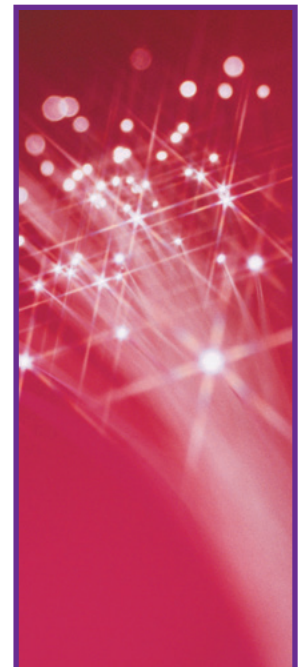

Glossary

intra-building telecommunications backbone: A pathway or cable facility for interconnecting telecommunications service entrance rooms, equipment rooms, or telecommunications rooms within a building.

jumper: An assembly of twisted-pairs without connectors, used to join telecommunications circuits/links at the cross-connect.

keying: The mechanical feature of a connector system that guarantees correct orientation of a connection, or prevents the connection to a jack, or to an optical fiber adapter of the same type intended for another purpose.

link: A transmission path between two points, not including terminal equipment, work area cables, and equipment cables.

longitudinal conversion loss: A ratio, expressed in dB, of measured differential voltage relative to the common mode voltage on a conductor pair applied at the same end.

longitudinal conversion transfer loss: A ratio, expressed in dB, of measured differential voltage at one end of a conductor pair relative to the common mode voltage applied on any pair at the opposite end or on any other pair on the same end.

main cross-connect: A cross-connect for first level backbone cables, entrance cables, and equipment cables.

main terminal space: The location of the cross-connect point of incoming cables from the telecommunications external network and the premises cable system.

megabits per second (Mbps): An application dependent specification describing the number of dis-

crete bits of information (i.e. a "1" or a "0") transmitted per second.

megahertz (MHz): Transmitted signal frequency described as the number of millions of sinusoidal signal cycles per second.

mode: A path of light in an optical fiber.

modular jack: A female telecommunications connector that may be keyed or unkeyed and may have 6 or 8 contact positions, but not all the positions need be equipped with jack contacts.

modular plug cord: A length of cable with a modular plug on both ends.

multimode optical fiber: An optical fiber that carries many paths of light.

multipair cable: A cable having more than four pairs.

multi-user telecommunications outlet assembly: A grouping in one location of several telecommunications outlet/connectors.

open office: A floor space division provided by furniture, moveable partitions, or other means instead of by building walls.

optical fiber: Any filament made of dielectric materials that guides light.

optical fiber cable: An assembly consisting of one or more optical fibers.

optical fiber duplex connection: A mated assembly of two duplex connectors and a duplex adapter.

outlet/connector (telecommunications): A connecting device in the work area on which horizontal cable or outlet cable terminates.

patch cord: A length of cable with a plug on one or both ends.

patch panel: A connecting hardware system that facilitates cable termination and cabling administration using patch cords.

pathway: A facility for the placement of telecommunications cable.

permanent link: A test configuration for a link excluding test cords and patch cords.

plenum: A compartment or chamber to which one or more air ducts are connected and that forms part of the air distribution system.

power sum attenuation-to-crosstalk ratio: A ratio, expressed in dB, determined by subtracting the insertion loss from the power sum near-end crosstalk loss.

power sum attenuation-to-crosstalk ratio far-end: replaces PSELFEXT. A computation of the unwanted signal coupling from multiple transmitters at the near-end into a pair measured at the far-end, and normalized to the received signal level.

power sum equal level far-end crosstalk:(obsolete) A computation of the unwanted signal coupling from multiple transmitters at the near-end into a pair measured at the far-end, and normalized to the received signal level.

power sum near-end crosstalk loss: A computation of the unwanted signal coupling from multiple transmitters at the near-end into a pair measured at the near-end

propagation delay: The time required for a signal to travel from one end of the transmission path to the other end.



Glossary

return loss: A ratio expressed in dB of the power of the outgoing signal to the power of the reflected signal.

room (telecommunications): An enclosed space for housing telecommunications equipment, cable terminations, and cross-connect cabling, that is the recognized location of the horizontal cross-connect.

screen: An element of a cable formed by a shield.

screened twisted-pair (ScTP): A balanced cable with an overall screen.

shield: A metallic layer placed around a conductor or group of conductors.

singlemode optical fiber: An optical fiber that carries only one path of light.

splice: A joining of conductors in a splice closure, meant to be permanent.

splice closure: A device used to protect a splice.

star topology: A topology in which telecommunications cables are distributed from a central point.

telecommunications: Any transmission, emission, and reception of signs, signals, writings, images, and sounds, that is information of any nature by cable, radio, optical, or other electromagnetic systems.

topology: The physical or logical arrangement of a telecommunications system.

transfer impedance: A measure of shielding performance determined by the ratio of the voltage on the conductors enclosed by a shield to the surface currents on the outside of the shield.

transition point: A location in the horizontal

cabling where flat undercarpet cable connects to round cable.

work area (work station): A building space where the occupants interact with telecommunications terminal equipment.

work area cable (cord): A cable connecting the telecommunications outlet/connector to the terminal equipment.

Units of Measure

°C	degrees Celsius
°F	degrees Fahrenheit
dB	decibel
ft	foot
GHz	gigahertz
in	inch
km	kilometer
lbf	pound force
m	meter
MHz	megahertz
mm	millimeter
N	newton
nm	nanometer
ns	nanosecond
V _{rms}	volts root mean square
µm	micron or micrometer

Conversion Table

English to Metric

	Multiply by:
from inches to centimeters	2.54
from feet to meters	0.3048
from yards to meters	0.9144
from ounces to grams	28.3495
from pounds to kilograms	0.453592
from Fahrenheit (F) to Celsius (C)	C=(F-32) x 0.555

Part Number

Fiber

Part #	Page #	Part #	Page #	Part #	Page #	Part #	Page #	Part #	Page #	Part #	Page #	Part #	Page #
60001	54	60087	90	60474	58	60954	92	61539	70	61883	70	62131	56
60002	54	60088	90	60475	58	61319	82	61540	80	61893	86	62132	56
60003	54	60089	90	60489	54	61337	82	61541	80	61894	88	62133	56
60004	54	60090	90	60490	58	61345	86	61542	80	61896	80	62135	56
60005	54	60097	92	60491	58	61347	86	61546	70	61897	82	62136	56
60006	64	60098	92	60492	58	61348	86	61547	70	61898	86	62137	56
60007	54	60101	92	60501	54	61349	86	61577	84	61899	86	62138	56
60008	58	60102	92	60502	58	61363	86	61578	84	61907	90	62139	56
60009	64	60258	66	60514	54 & 60	61376	86	61579	84	61908	90	62141	56
60010	54	60288	54	60515	60	61378	58	61580	84	61909	92	62142	56
60011	54	60289	54	60516	60	61379	58	61631	68	61910	92	62143	56
60012	54 & 60	60316	58	60517	62	61380	86	61632	68	61911	92	62144	56
60014	60	60345	92	60518	62	61415	86	61769	56	61912	92	62145	56
60015	64	60346	92	60520	60	61421	80	61772	68	61941	68	62147	56
60022	58	60356	92	60522	62	61433	82	61791	54	61956	88	62148	56
60023	58	60376	54	60567	64	61444	58	61792	54	61959	88	62149	56
60024	58 & 62	60405	82	60581	64	61457	58	61793	54	61979	88	62150	56
60026	58 & 62	60425	54	60595	64	61459	88	61838	54	61980	88	62151	56
60027	66	60430	58	60596	66	61460	88	61842	54 & 60	61986	58	62153	56
60028	66	60431	58	60598	66	61464	88	61844	54	61988	54	62154	56
60029	62	60432	58	60613	64	61468	88	61851	58	62016	80	62155	56
60030	58	60462	54	60614	66	61480	88	61852	58	62017	80	62156	56
60031	58 & 62	60463	54 & 60	60633	64	61483	54	61853	58	62018	80	62157	56
60033	66	60464	54	60634	66	61486	80	61854	58	62019	80	62178	88
60037	54	60465	54	60932	92	61495	86	61855	58 & 62	62029	56	62179	88
60038	54	60466	54	60933	92	61497	92	61857	58	62066	88	62180	88
60039	54	60467	54	60934	92	61506	70	61865	60	62068	84	62181	88
60040	54	60468	58	60937	92	61507	70	61868	62	62124	56	62183	82
60042	58	60469	58	60940	90	61522	86	61872	64	62125	56	62184	82
60044	58	60470	58	60943	90	61523	86	61874	64	62126	56	62185	82
60063	54 & 60	60471	58 & 62	60944	92	61524	86	61877	66	62127	56	62186	82
60085	90	60472	58	60945	92	61537	70	61879	66	62129	56	62187	82
60086	90	60473	58	60946	92	61538	70	61882	70	62130	56	62205	74

Part Number

Fiber

Part #	Page #	Part #	Page #	Part #	Page #	Part #	Page #	Part #	Page #	Part #	Page #
62214	78	62371	74	62593	78	62702	72	62743	68	62954	62
62216	78	62372	74	62594	78	62703	72	62744	68	62956	62
62218	78	62373	74	62595	78	62704	72	62745	70	62957	60
62220	78	62374	74	62596	78	62705	72	62746	70	62958	60
62239	74	62375	74	62597	78	62706	72	62747	72	62959	60
62241	74	62382	74	62598	78	62707	72	62748	72	62960	60
62242	74	62411	74	62632	82	62711	74	62749	74	62962	60
62243	74	62412	74	62633	82	62712	74	62750	74	62963	60
62244	74	62413	78	62634	82	62715	74	62751	74		
62251	82	62424	72	62635	82	62716	72	62752	74		
62255	82	62425	72	62637	82	62720	58	62753	74		
62257	82	62426	72	62638	82	62721	58	62754	76		
62274	60	62427	72	62650	78	62722	58	62755	76		
62275	60	62428	72	62668	78	62723	58	62756	82		
62276	60	62429	72	62675	74	62724	58 & 64	62766	90		
62277	60	62430	74	62676	74	62725	58	62767	90		
62285	82	62431	74	62677	74	62726	58	62768	90		
62286	82	62438	72	62678	74	62727	60	62769	92		
62294	76	62449	74	62683	74	62728	60	62770	92		
62295	76	62450	74	62684	74	62729	60	62771	92		
62296	76	62460	74	62685	74	62730	60	62772	88		
62323	76	62489	74	62686	74	62731	60	62773	94		
62332	74	62490	74	62687	74	62732	60	62774	94		
62333	74	62491	74	62688	74	62733	60	62811	84		
62335	74	62492	74	62689	74	62734	62	62812	84		
62336	74	62493	74	62692	74	62735	62	62813	86		
62337	76	62494	74	62693	74	62736	62	62814	86		
62338	72	62544	78	62694	74	62737	62	62820	80		
62352	80	62545	78	62695	74	62738	62 & 66	62821	80		
62353	80	62546	78	62696	74	62739	62	62941	78		
62354	80	62547	78	62697	74	62740	62	62950	62		
62355	80	62548	78	62698	74	62741	64	62951	62		
62356	80	62549	78	62701	72	62742	66	62953	62		

Part Number

COPPER

Part #	Page #	Part #	Page #
30016	28	30277	36
30022	28	30287	24
30024	32	30295	18
30025	32	30303	18
30093	48	30304	18
30129	26	30305	10
30134	52	30307	8
30145	50	30308	46
30154	26	30309	34
30172	48	30310	42
30180	38	30315	36
30183	30	30319	12
30203	48	30322	22
30212	30	30323	22
30218	20	38653	40
30222	20	38696	46
30233	16	38891	44
30234	16	38893	44
30237	34	39092	40
30238	34	39228	52
30245	12	39419	46
30250	10	41684	14

COMPOSITE

Part #	Page #	Part #	Page #
62352-6	52	62876-12	52
62657-12	52	62877-12	52
62859-2	52	62878-12	52
62860-12	52	62879-12	52
62861-12	52	62880-12	52
62862-12	52	62881-12	52
62863-12	52	62882-12	52
62864-12	52	62883-12	52
62865-12	52	62884-12	52
62866-12	52	62885-12	52
62867-12	52	62886-12	52
62868-12	52	62887-12	52
62869-12	52	62888-12	52
62870-12	52	62889-12	52
62871-12	52	62890-12	52
62872-12	52	62891-12	52
62873-12	52	62892-12	52
62874-12	52	62893-12	52
62875-12	52	62894-12	52

Put-Up Code

Reelex-Boxes	2
Reels	3
Reel-In-A-Box	4

Jacket Color Abbreviations

Black	BK
Blue	BL
Brown	BR
Gray	GA
Green	GR
Red	RD
White	WH
Yellow	YE

How to Build an Hitachi Part Number

Section 1	Section 2	Section 3	Section 4
39419	8	BL	2
Base Part Number	Number of Conductors	Jacket Color	Reel Type

Part number 39419-8-BL2 is a Category 5e, plenum rated 4-pair cable with a blue jacket and packaged in a reelex-box.
Note: Some cable constructions may require additional information when ordering.

Notes

Notes

Installation

Conduit Fill Chart

Conduit Size	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	3-1/2"	4"
40% Int. Area	0.121"	0.213"	.345"	.598"	.814"	1.342"	2.343"	3.538"	4.618"	5.901"
Cable Diameter	0.19"	4	7	12	21	28	47	82	124	208
	0.2"	4	6	11	19	26	42	74	112	188
	0.21"	3	6	10	17	23	38	67	102	170
	0.22"	3	5	9	15	21	35	61	93	155
	0.23"	3	5	8	14	19	32	56	85	142
	0.24"	2	4	7	13	18	29	51	78	130
	0.25"	2	4	7	12	16	27	47	72	120
	0.26"	1	4	6	11	15	25	44	66	111
	0.27"	1	3	6	10	14	23	41	61	103
	0.28"	1	3	5	9	13	21	38	57	96
	0.29"	1	3	5	9	12	20	35	53	89
	0.3"	1	3	5	8	11	19	33	50	83
	0.31"	1	3	4	8	10	17	31	47	78
	0.32"	1	2	4	7	10	16	29	44	73
	0.33"	1	2	4	7	9	15	27	41	69
	0.34"	1	2	4	6	9	14	26	39	65
	0.35"	1	1	3	6	8	14	24	36	61

The above conduit fill chart is for reference only. The conduit capacity is based on the National Electrical Code requirement of 40% maximum fill. To determine the maximum conduit fill for cable O.D.s other than those referenced above, use the following steps: 1. Square the O.D. of the cable. 2. Multiple the result by .7854. This is the total area of the cable. 3. Multiple the total area of the cable by the number of cables you wish to place in the conduit. This is the total area of the cable bundle. Determine the appropriate conduit size by referencing the 40% Interior Area row.

Cable Ampacity

The table below is derived from one approved by the National Fire Protection Agency for use in the next edition of the National Electrical Code known as NFPA-70. The complete table will be found in section 725.144 of the code. It will also be referenced in Article 800 Communication Circuits. The table identifies the ampacity of each conductor (in Amperes) in a 4-pair Class 2 or Class 3 data cable. Ambient temperature used for development of the table is 30°C (86°F) with all conductors in all cables carrying current. The table is based on 60°C (140°F), 75°C (167°F) and 90°C (194°F) rated cables.

AWG	Number of 4-Pair Cables in a Bundle																				
	1			2-7			8-19			20-37			38-61			62-91			92-192		
	Temp Rating			Temp Rating			Temp Rating			Temp Rating			Temp Rating			Temp Rating			Temp Rating		
	60°C	75°C	90°C	60°C	75°C	90°C	60°C	75°C	90°C	60°C	75°C	90°C	60°C	75°C	90°C	60°C	75°C	90°C	60°C	75°C	90°C
24	2.0	2.0	2.0	1.0	1.4	1.6	0.8	1.0	1.1	0.6	0.7	0.9	0.5	0.6	0.7	0.4	0.5	0.6	0.3	0.4	0.5
23	2.5	2.5	2.5	1.2	1.5	1.7	0.8	1.1	1.2	0.6	0.8	0.9	0.5	0.7	0.8	0.5	0.7	0.8	0.4	0.5	0.6
22	3.0	3.0	3.0	1.4	1.8	2.1	1.0	1.2	1.4	0.7	0.9	1.1	0.6	0.8	0.9	0.6	0.7	0.8	0.5	0.6	0.7

Product Performance Guarantee

All goods sold are warranted to be free from defects in material and workmanship on the date of delivery of the materials to the F.O.B. point stated. Seller makes no representation or warranty of any kind, expressed or implied with respect to the goods sold hereunder, whether as to merchantability, fitness for particular purpose, or any other matter. Seller's only obligation is to replace goods that are proved defective within one (1) year after the date of delivery, but always provided the product receives normal and proper use, and due care in handling is exercised. If the goods purchased show defects in material or workmanship within one (1) year after date of delivery, Buyer must discontinue use thereof and must properly notify Seller, so that the matter may be investigated and material inspected and examined by the Seller without inference or delay. Contact Hitachi Cable for full warranty details.



WORLDWIDE COVERAGE

HITACHI
Inspire the Next

 **Hitachi Cable America Inc.**

900 Holt Avenue, Manchester, New Hampshire 03109 USA
Tel: +1-603-669-4347 Fax +1-603-669-9621
www.hca.hitachi-cable.com