


SMART ACCESS EXPANSION BOARD CAP4EXPND

SECTION 28 13 00

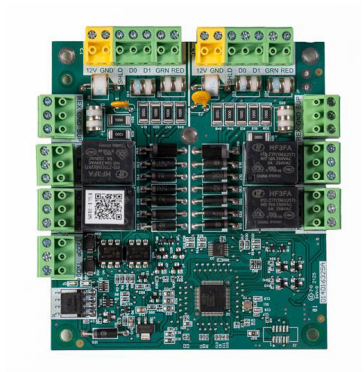

SPECIFICATIONS

COMPATIBLE WITH	CAPXAP-CNTL and CAP4AP-CNTL control boards
POWER SUPPLY	Powers via control boards
WIEGAND INPUT DATA FORMAT	26 bit, 30 bit, 36 bit (LiftMaster), 37 bit (HID), 37 bit (Transcore), 32 bit (Mifare) and 56 bit (LiftMaster Mobile Credentials)
MAX NUMBER OF GATES/DOORS OF CONTROL (EACH)	4
WIEGAND INPUT	2
RELAY OUTPUT	4 (2 primary, 2 auxiliary OR up to 4 independent relays via Advanced Config I/O
WARRANTY	2 years

DATA SHEET
SMART ACCESS EXPANSION BOARD CAP4EXPND

