

Premises Copper > Category 3 > UTP > 3 pairs > 24 AWG

3X24 CMX OUTDOOR-CMR BE 1K FT POP™ Box

CMR/CMX

Part Number: 12-403-37

Status: Available



ENVIRONMENTAL SPECIFICATIONS

Storage/Shipping Temp. Range -40/+75

PHYSICAL CHARACTERISTICS

Pallet Quantity (ft) 45000
Package Length 1000
Package Type POP™ Box

Product Description

The Superior Essex Category 3 Station Wires CMR/CMX Outdoor cable is specifically designed for outdoor, indoor, or a combination of both applications. CMX Outdoor cables extend the run between the Network Interface Unit and the point of entry into the interior of a residence or a premise. Their twisted pair construction is small and lightweight. These Category 3 (CAT 3) cables have been tested and listed as UL® 444 Outdoor compliant, requiring the cable to resist 300 hours of UV and heat. In addition, the CMR listing allows the cable to be used in riser spaces per UL 1666, eliminating the need to transition to fire resistant cables. UV-locking compounds also aid in protecting the cable from light. Two levels of Outdoor Protection are Available: CMR/CMX Outdoor and Extreme CMR/CMX Outdoor which meets the -40°C anvil test.

Applications

- 4 Mbps token ring (IEEE 802.5)
- Analog voice
- 10 Mbps 10BASE-T Ethernet (IEEE 802.3)
- Telecommunications closet wiring


Features

- Extremely flexible, FR-PVC jacket
- CMR/CMX Outdoor combination
- Extreme CMR/CMX Outdoor combination
- Beige, Gray and Ivory jacket colors
- Various conductor colors

Benefits

- Easier and less time-consuming installations, no kinking of outer jacket
- Indoor/outdoor use
- Indoor/outdoor use with extreme cold temperature feature
- Enhances appearance on outdoor siding
- Customer preference

SUSTAINABILITY CERTIFICATIONS

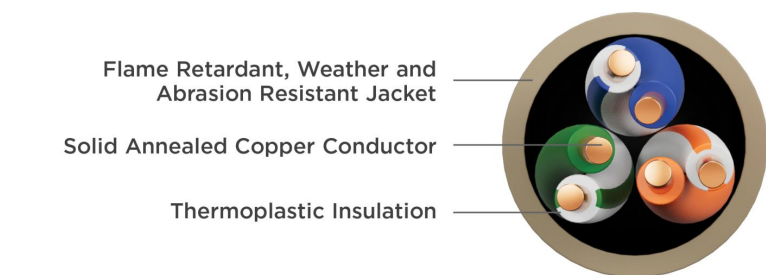

Flame Retardant, Weather and Abrasion Resistant Jacket

Solid Annealed Copper Conductor

Thermoplastic Insulation



GENERAL SPECIFICATIONS

Jacket	PVC
Jacket Color	Black
End User Application	Enterprise, Residential, LAN
Environment	Indoor/Outdoor
Standards Compliance	UL 444 CSA C22.2 No. 214-08 UL 1666 Extreme CMR/CMX Outdoor Includes ICEA -40°C Anvil Test ANSI/TIA-568.2-D Article 800, NEC (NFPA 70) RoHS-compliant/RoHS 2-compliant
NRTL Programs	UL, c(UL) Listed CMR UL, c(UL) Listed CMX Outdoor

COPPER SPECIFICATIONS

Conductor	Copper solid
Conductor Count	6
AWG (mm)	24 (0.51)
Insulation	PE

ENVIRONMENTAL SPECIFICATIONS

Operating Temp. Range	-20/+90
-----------------------	---------