
Replacement Parts

ITEM	DESCRIPTION		PART #
1	Short Shroud		†
2	Lens		†
3	Lamp, MR-16		See MR-16 Lamp Charts
4	Socket, 10' (3 m)		761600
5	Spring		†
6	O-Ring, Large		250010280017
7	Housing		†
8	Knuckle Base		†
9	O-Ring, Small		250010280002
10	Screw, #10–24 x ⅜"		250013940000
11	Knuckle		†
12	Screw, ¼"–20 x ¾"		250010290000
11-12	Knuckle Subassembly		KFM-050-XX*
13	Super Slot Spike		753900
14	Long Shroud		†
15	Critter Plug		250031010000SP
16	Lock Ring		250030410000SP
1–2, 6	Lens Cap Assembly, Short	Clear	RS-LC-XX*
		Frosted	RS-LF-XX*
2, 6, 14	Lens Cap Assembly, Long	Clear	RS-LC-LS-XX*
		Frosted	RS-LF-LS-XX”

** XX = Finish code*
†This part is not serviceable. Contact Customer Support or a local distributor to order a new product.

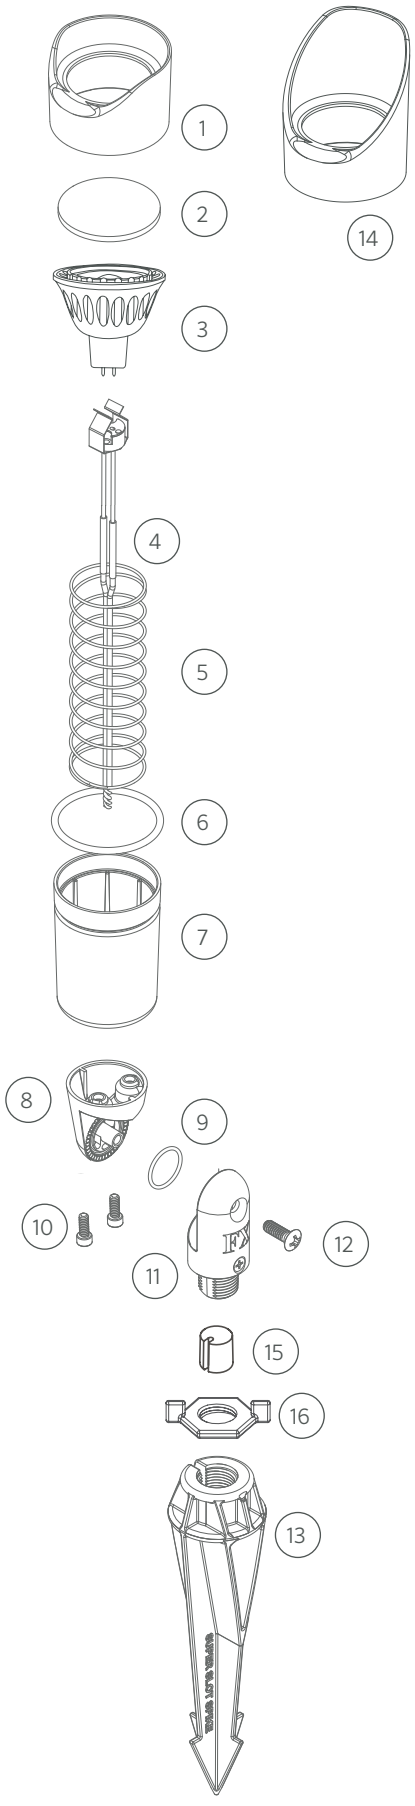

MR-16 LED Lamp Chart

LUMENS / VA	CCT	BEAM ANGLE	PART #
272 lm / 4.2 VA	2700K	10° Very Narrow	MR16-LED-20-W-VN
247 lm / 4.2 VA	2700K	35° Flood	MR16-LED-20-W-FL
238 lm / 4.2 VA	2700K	60° Wide Flood	MR16-LED-20-W-WF
458 lm / 5.3 VA	2700K	10° Very Narrow	MR16-LED-35-W-VN
394 lm / 5.3 VA	2700K	35° Flood	MR16-LED-35-W-FL
310 lm / 5.3 VA	2700K	60° Wide Flood	MR16-LED-35-W-WF
447 lm / 6.5 VA	2700K	35° Flood	MR16-LED-50-W-FL
287 lm / 4.2 VA	3000K	10° Very Narrow	MR16-LED-20-S-VN
238 lm / 4.2 VA	3000K	35° Flood	MR16-LED-20-S-FL
242 lm / 4.2 VA	3000K	60° Wide Flood	MR16-LED-20-S-WF
458 lm / 5.3 VA	3000K	10° Very Narrow	MR16-LED-35-S-VN
394 lm / 5.3 VA	3000K	35° Flood	MR16-LED-35-S-FL
380 lm / 5.3 VA	3000K	60° Wide Flood	MR16-LED-35-S-WF
505 lm / 6.5 VA	3000K	35° Flood	MR16-LED-50-S-FL
287 lm / 4.2 VA	3900K	10° Very Narrow	MR16-LED-20-C-VN
288 lm / 4.2 VA	3900K	35° Flood	MR16-LED-20-C-FL
290 lm / 4.2 VA	3900K	60° Wide Flood	MR16-LED-20-C-WF
365 lm / 5.3 VA	3900K	10° Very Narrow	MR16-LED-35-C-VN
340 lm / 5.3 VA	3900K	35° Flood	MR16-LED-35-C-FL
350 lm / 5.3 VA	3900K	60° Wide Flood	MR16-LED-35-C-WF
464 lm / 6.5 VA	3900K	35° Flood	MR16-LED-50-C-FL

MR-16 ZD LED Lamp Chart

LUMENS / VA	CCT	BEAM ANGLE	PART #
458 lm / 5.3 VA	2700K	10° Very Narrow	MR16-ZD-35-W-VN
394 lm / 5.3 VA	2700K	35° Flood	MR16-ZD-35-W-FL
310 lm / 5.3 VA	2700K	60° Wide Flood	MR16-ZD-35-W-WF
447 lm / 6.5 VA	2700K	35° Flood	MR16-ZD-50-W-FL
458 lm / 5.3 VA	3000K	10° Very Narrow	MR16-ZD-35-S-VN
394 lm / 5.3 VA	3000K	35° Flood	MR16-ZD-35-S-FL
380 lm / 5.3 VA	3000K	60° Wide Flood	MR16-ZD-35-S-WF
505 lm / 6.5 VA	3000K	35° Flood	MR16-ZD-50-S-FL
365 lm / 5.3 VA	3900K	10° Very Narrow	MR16-ZD-35-C-VN
340 lm / 5.3 VA	3900K	35° Flood	MR16-ZD-35-C-FL
350 lm / 5.3 VA	3900K	60° Wide Flood	MR16-ZD-35-C-WF
464 lm / 6.5 VA	3900K	35° Flood	MR16-ZD-50-C-FL

MR-16 Eco LED Lamp Chart

LUMENS / VA	CCT	BEAM ANGLE	PART #
320 lm / 6.2 VA	2700K	35° Flood	MR16-ECO-20-W-FL
309 lm / 6.2 VA	2700K	60° Wide Flood	MR16-ECO-20-W-WF
465 lm / 9.2 VA	2700K	35° Flood	MR16-ECO-50-W-FL
430 lm / 9.2 VA	2700K	60° Wide Flood	MR16-ECO-50-W-WF

hunter.info/**MR16**

Lamp Chart

LAMP		COMMENTS	WATTAGE	BEAM ANGLE	FOR USE WITH
	Halogen MR-8	2,000 Average Life Hour	20	Wide	CG
			20N	Narrow	CG
	Halogen MR-11	2,000 Average Life Hour	10	Wide	SM
			20	Wide	FC, MP, SM
			35	Wide	CL, TS, SM
	Halogen MR-16	5,000 Average Life Hour 10,000 Hour option available (for fixtures using 20/35/50 Watt)	20	Wide	LO, LR, MU, RP, RS, TE
			20V	Very Narrow	LO, LR, MU, RP, RS, TE
			35	Wide	LO, LR, MU, RP, RS, TE
			50	Wide	LO, LR, MU, RP, TE
			35V	Very Narrow	LO, LR, MU, RP, RS, TE
			50N	Narrow	LO, LR, MU, RP, TE
			50V	Very Narrow	LO, LR, MU, RP, TE
	Titan Halogen MR-16	12,000 Average Life Hour (for fixtures using 20 Watt) 18,000 Average Life Hour (for fixtures using 35/50 Watt)	20	Wide	LB
			35	Wide	LB
			50	Wide	LB
	Xenon G4	10,000 Average Life Hour (for fixtures using 10/15 Watt) 5,000 Average Life Hour (for fixtures using 20 Watt)	10	N/A	BD, CA, CB, CM,CP, CR, CV, DL, DM, DP, DR, DS, EA, GT, MM, PF, PR, PV, QF, SC, SP, RL, UN
			15	N/A	BD, CA, CB, CV, DL, DM, DR, DS, EA, PF, PR, QF, SC, SP
			20	N/A	BD, CA, CB, CM, CR, CV, DL, DM, DR, DS, EA, GN, GT, LM, PD, PF, PR, QF, RL, SC, SP
	Halogen T3	2,000 Average Life Hour	5	N/A	SI
			10	N/A	BD, CA, CB, CR, CV, DL, DM, DP, DR, DS, EA, GT, MM, PF, PR, PV, QF, RL, SC, SI, SP,
			20	N/A	BD, CA, CB, CR, CV, DL, DM, DR, DS EA, GT, PF, PR, QF, RL, SC, SI, SP,
			35	N/A	GN, GT, RL, SI
	Halogen AR-11	2,000 Average Life Hour	20	Wide	CL, ML, TC, TS, VL
			20N	Narrow	CL, PM, TC, TS, VL
			20V	Very Narrow	CL, TC, TS, VL
	Halogen AR-20	2,000 Average Life Hour	50	Wide	TS
			50N	Narrow	TS
	Incandescent 93	900 Average Life Hour	12	N/A	AL, FG, LS, TD
	Incandescent 1141	1,200 Average Life Hour	18	N/A	AL, FG, TD
	Incandescent 1156	1,200 Average Life Hour	25	N/A	AL, FG, TD
	Halogen PAR36	4,000 Average Life Hour	20	Wide	CF
			35	Wide	CF

BEAM ANGLE KEY (APPROXIMATE VALUES)			
Very Narrow: 10°	Narrow: 25°	Wide: 40°	Very Wide: 60°