

MODEL #

DBW5MP-POE-64G

Onvif® | GSI



PRO WiFi DOORBELL CAMERA



FULL HEAD TO TOE VIEW (3:4)

Full head-to-toe view with a unique outward-leaning design for enhanced vertical coverage.



EVENT-ACTIVATED NIGHTLIGHT

Automatically activates the white light when an event is detected.



TWO-WAY COMMUNICATION

Speak with visitors using the built-in microphone and speaker.



PERSON, LOITERING & PACKAGE DETECTION

AI-powered detection for people, loitering activity, and delivered packages.



WIFI TRANSMISSION

Seamless connectivity for easy access to live video footage from anywhere, anytime.



MICRO SD CARD SLOT UP TO 512GB

Store all your footage securely with a micro SD card slot that supports up to 512GB of storage for extensive video recording.





CAMERA

Sensor	1/2.7" Progressive Scan CMOS
Image Size	1944 × 2592
Shutter Speed	1/5 – 1/200000 s
Iris Type	Fixed IRIS
Min Illumination	0 lux (white LED on)
Focal Length (mm)	2.1 mm
Lens Mount	M8
Wide Dynamic Range (WDR)	WDR
Backlight Compensation (BLC)	Off/On
Highlight Compensation (HLC)	Auto

IMAGE

Compression	H.265/H.264/MJPEG
H.264 Profile	Baseline Profile/Main Profile/High Profile
Bitrate Control	CBR/VBR
Bitrate Range	256 Kbps – 6 Mbps
Resolution	Main Stream 50/60Hz: 20fps @ 1944 x 2592, 1800 x 2400 (Default) Sub Stream 50/60Hz: 20fps @ 960 x 1280
Image Settings	Saturation, hue, brightness, contrast, sharpness, 3DNR
Audio Codecs	G711A, G711U

INTERFACES

Ethernet	1× RJ45 (10/100BASE-T)
Audio Type	Built-in microphone & speaker
Hardware Reset	Yes
Onboard Storage	Micro SD, up to 512GB
Wifi	2.4GHz & 5GHz WiFi
Doorbell Button	Yes
Led Indicators	Yes

FUNCTION

Remote Monitoring	Web client/CMS remote control/Mobile App
Online Connection	Supports simultaneous monitoring for up to 5 users. Supports multi-stream real time transmission
Protocols	UDP, IPv4, DHCP, NTP, RTSP, DDNS, SMTP, UPnP, HTTPS, HTTP
IP Version	IPv4/IPv6
Ai Features	Human Detection (HD), Package Detection (PKD), Loitering Detection (LD)
General Function	Video mask, Motion
IR Range	3 m
IP Rating	IP65

GENERAL


Input Voltage	AC/DC 16-24 V / PoE (IEEE 802.3af)
PoE	Yes
Power Consumption	Max.9.84W
Operating Temp	-25°C to +55°C
Dimensions	146×46×30 mm
Weight	115 g
Installation	Wall mount, (Mounting Bracket, Angled Bracket)

WIRELESS CHIME #DBW-CHIME

Input	AC 100~240 V; 50~60 Hz
Transmission Mode	DBW-CHIME - RF 433 Mhz
Buttons	DBW-CHIME: Setting up/Selecting ringtones/ Adjusting volume



DIMENSIONS

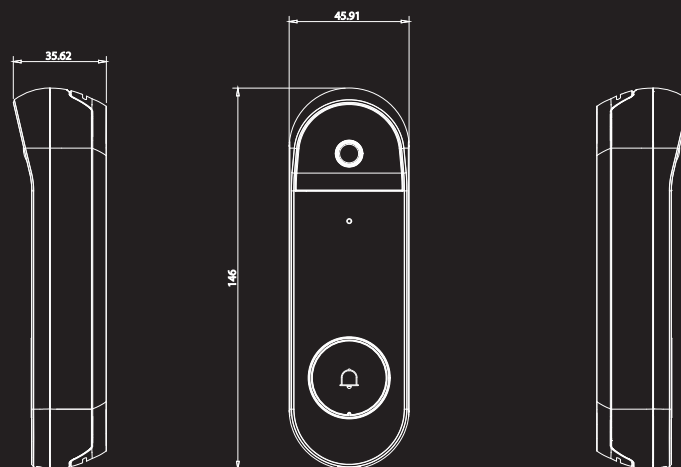

COMPATIBLE ACCESSORIES

INCLUDED ACCESSORIES



 **DBW-CHIME**
WIRELESS CHIME

SECURITY. INNOVATION. RELIABILITY. POWERED BY G.S.D GROUP INC.

At G.S.D Group, we design and deliver innovative, reliable, and high-performance security solutions that protect people, businesses, and critical infrastructure. From intelligent surveillance and access control to enterprise software and AI-powered technologies, we provide complete security ecosystems built for today's challenges and tomorrow's opportunities.

STAY CONNECTED



 CONTACT US



 YOUTUBE



 LINKEDIN



 NEWSLETTER

COMPLIANCE



CE MARKING



FCC CERTIFICATE



RoHS COMPLIANT



NDAA COMPLIANT

CONNECTION & INTERFACES



HS CODE



UPC CODE



ONVIF COMPLIANT

DOWNLOAD OUR APP: OV CONNECT



WWW.GSDGROUPINC.COM  A CANADIAN ENTERPRISE