LGNXTO4CV3WF

4.1MP ChromaView Plus Fixed Turret Network Camera



CHROMAVIEW


NDAA Compliant


4MP | WDR 120dB | Built-in Mic | IP67

In Short

This 4MP ChromaView Plus fixed turret network camera delivers true 24/7 colour imaging with a 1/1.8” CMOS sensor, F1.0 large-aperture lens, and AI-ISP processing for cleaner low-light video. With 120 dB WDR, H.265+ compression, built-in microphone, smart human and vehicle target classification, and IP67-rated protection, it is built for reliable professional security applications. Designed for trusted installations, this camera is 100% NDAA compliant and delivers a premium, dependable solution for commercial and enterprise environments.

Dimensions

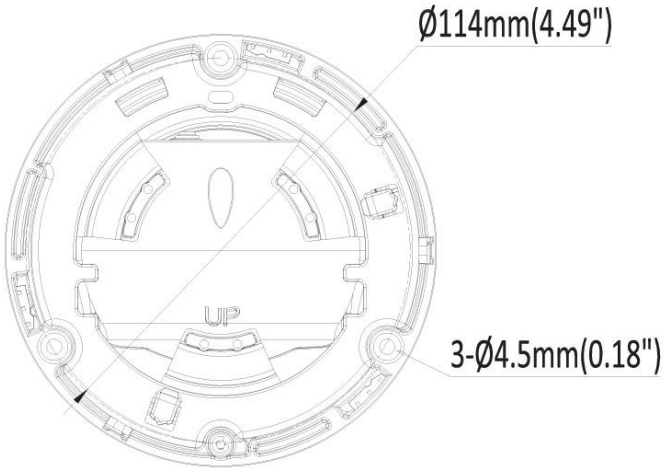

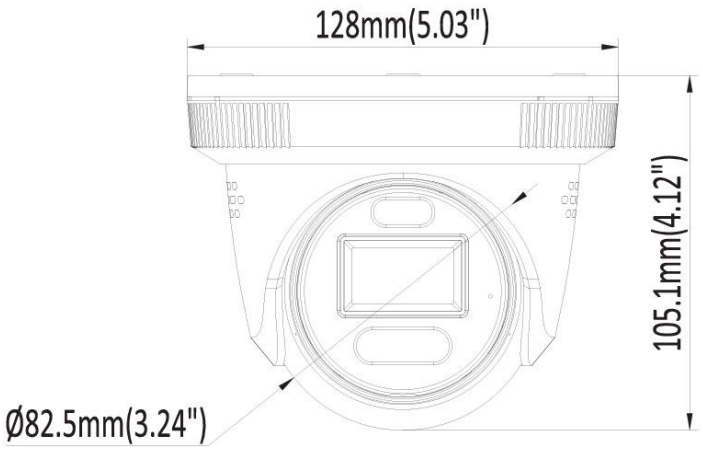

*Design and specifications are subject to change without notice - Version 2026-05-15

TECHNICAL SPECIFICATIONS

Product Identification	
Part Number	LGNXTO4CV3WF
Imaging Performance	
Image Sensor	1/1.8” 4 MP Progressive Scan CMOS Sensor
Minimum Illumination	Colour: 0.0005 Lux @ F1.0, AGC ON; 0 Lux with warm light on
Illumination Distance	30 m warm light; smart illumination not available
Strobe Light	N/A
Pan / Tilt / Rotation	Pan: 0° to 360° | Tilt: 0° to 75° | Rotation: 0° to 360°
Optics	
Focal Length	2.8 mm / 3.6 mm
Aperture	F1.0
Field of View	Horizontal: 2.8 mm: 110° / 3.6 mm: 95°
	Vertical: 2.8 mm: 59° / 3.6 mm: 51°
	Diagonal: 2.8 mm: 130° / 3.6 mm: 113°
Mount	M16
DORI Performance	
Detect	2.8 mm: 57 m / 3.6 mm: 68 m
Observe	2.8 mm: 23 m / 3.6 mm: 27 m
Recognize	2.8 mm: 11 m / 3.6 mm: 14 m
Identify	2.8 mm: 6 m / 3.6 mm: 7 m
Video & Audio Compression	
Video Compression	H.265+ / H.265 / H.264+ / H.264 / MJPEG
H.265 Codec Profile	Main Profile
H.264 Codec Profile	Base / Main / High Profile
Video Bit Rate	11 Kbps to 10 Mbps
Multiple Streams	Triple streams supported
Audio Compression	G.711A, G.711U
Audio Bit Rate	64 Kbps
Video Output	
Maximum Resolution	4MP (2688 x 1520)
Main Stream	50Hz: 20fps 4MP (2688 x 1520), 25fps 4MP (2560 x 1440), 25fps 1080P (1920 x 1080); 60Hz: 20fps 4MP (2688 x 1520), 30fps 4MP (2560 x 1440), 30fps 1080P (1920 x 1080)
Sub Stream	50Hz: 25fps 720P (1280 x 720), 25fps D1 (704 x 576), 25fps CIF (352 x 288); 60Hz: 30fps 720P (1280 x 720), 30fps D1 (704 x 480), 30fps CIF (352 x 240)

*Design and specifications are subject to change without notice

TECHNICAL SPECIFICATIONS

Third Stream	50Hz: 25fps CIF (352 x 288); 60Hz: 30fps CIF (352 x 240)
Image Optimization	
Parameters	Brightness / Contrast / Saturation / Hue / Sharpness
Shutter	Auto / Manual, 1/3 s to 1/100000 s
Day / Night	IR Cut Filter
WDR	120 dB
Noise Reduction	2D / 3D DNR
BLC	Backlight compensation supported
HLC	Highlight compensation supported
ROI	Region of interest supported
Rotation	Image rotation supported
Intelligent Analytics	
Basic Events	Motion detection, video tampering
Smart Events	Smart motion detection, line crossing, intrusion, region entrance, region exiting; alarm triggering by specified human and vehicle target types
Face Detection	Not available
Network & Cybersecurity	
Storage	NAS (NFS, SMB/CIFS)
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, IGMP, UPnP, SMTP, UPnP-TM, Cloud
Compatibility	ONVIF Profile S, Profile G, Profile T; SDK
Security	HTTPS encryption, IP address filtering, basic and digest authentication for HTTP/HTTPS, TLS 1.1/1.2, WSSE, and digest authentication for ONVIF
Users	Up to 40 users
Browsers	Plug-in required live view: IE 10, IE 11; Local service: Chrome 57.0+, Firefox 52.0+
Mobile	iOS, Android
Active Deterrence	
Red/Blue Light	N/A
Sound Warning	N/A
System Interfaces	
Network	1 RJ45 10M/100M self-adaptive Ethernet port
On-board Storage	Up to 256GB
Microphone	Built-in microphone supported
Speaker	N/A
Audio Input / Output	N/A

*Design and specifications are subject to change without notice

TECHNICAL SPECIFICATIONS

Alarm Input / Output	N/A
Reset Button	Reset button supported
Mechanical & Environmental	
Operating Conditions	-40°C to 60°C (-40°F to 140°F)
Humidity	95% or less, non-condensing
Power Supply	12V DC ± 25%
PoE	PoE IEEE 802.3af
Power Consumption	Maximum 7.3 W
Protection	IP67
Material	Metal housing
Dimensions	Ø128 x 105.1 mm (Ø5.03” x 4.12”)
Weight	715 g (1.57 lb)

*Design and specifications are subject to change without notice

TECHNICAL SPECIFICATIONS

Accessories



XLGNXLB12C(B) - Junction Box, Ø142 x 46.5 mm




XLGNXLB07C(B) - Wall Mount, Ø136 x 120 x 208 mm



XLGNXPM03 - Pole Mount, Ø170 x 135.8 x 43.7 mm



XLGNXCM700 - Pendant Mount, Ø116 x 734.5 mm



XLGNXJB17(B) - Junction box with doors and hinges for XLGNXLB07C(B) and XLGNXLB14C(B), 170 x 153.6 x 70 mm




XLGNXPC1B5 - Corner Mounting Bracket, 194 x 183 x 104 mm

*Design and specifications are subject to change without notice


TECHNICAL SPECIFICATIONS

Mounting Options


Select the appropriate mounting option based on the installation environment.

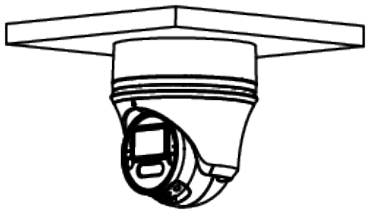


XLGNXLB12C(B)




XLGNXLB07C(B)



XLGNXLB12C(B) + XLGNXLB07C(B)




XLGNXLB12C(B) + XLGNXCM700

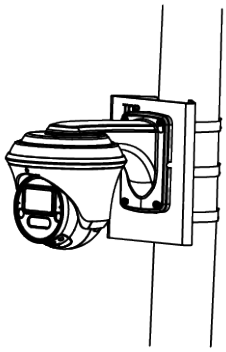


XLGNXLB07C(B) + XLGNXPM03



XLGNXLB12C(B) + XLGNXLB07C(B) + XLGNXPM03

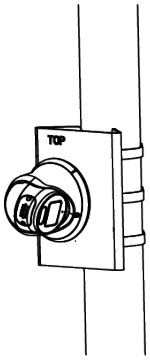

XLGNXPM03



XLGNXLB12C(B) + XLGNXPM03

*Design and specifications are subject to change without notice