


**COMELIT**  
WITH • YOU • ALWAYS

# ultra





5

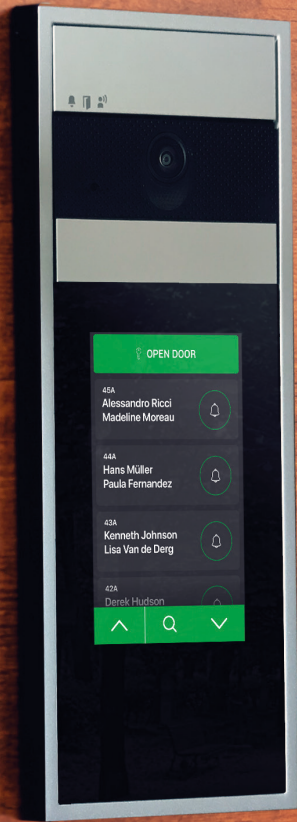

OPEN DOOR

42A  
Alessandro Ricci  
Madeline Moreau

44A  
Hans Müller  
Paula Fernandez

43A  
Kenneth Johnson  
Lisa Van de Derg

42A  
Derek Hudson

^ Q v

*Ultra is... simply brilliant!*

*Ultra is one of the products that best expresses Comelit's attitude, encompassing constant research, pushing beyond our own limits and striving for constant improvement. It is the ultimate expression of our commitment, as a company, to go one step further. Beyond the obvious, beyond what we have achieved so far, beyond our imagination. Ultra is today's entrance panel of the future. Created to fully adapt to the requirements of anyone who chooses it, Ultra is the essence of security, elegance, innovation and reliability, designed and produced with the aim of making the user's life easier. Don't call it an entrance panel: Ultra is a new step forward in the evolution of Comelit and goes beyond everything we have seen up to this point.*

**Edoardo Barzasi**  
**CEO Comelit Group S.p.A.**

A handwritten signature in black ink, appearing to read 'Edoardo Barzasi', with a long, sweeping horizontal stroke extending to the right.



# Comelit.

**A GROUP OF 800 PEOPLE  
DRIVEN BY THE SAME SPIRIT.**

**ITALY**

**FRANCE**

**SPAIN**

**GERMANY**

**SINGAPORE**

HONG KONG

INDONESIA

VIETNAM

**UNITED KINGDOM**

IRELAND

**NETHERLANDS**

**BELGIUM**

**USA**

**UAE**

Since 1956, we have been making history in the door-entry phone and door entry monitor sector and have actively contributed to its **ongoing** development. Over the years, the experience gained in this specific sector when it comes to meeting installation **requirements**, such as simplicity, reliability and multiple functions, has allowed us to grow and make a name for ourselves as an **international benchmark company**.

D E S I G N  
M I L A N O



ISO 140001  
CERTIFIED  
COMPANY



Our **values** and our business **vision** are the foundation upon which we have developed a well-run, well-structured global organisation, with **10 branch offices**, **6 Research and Development centres**, more than **800 employees** and a commercial presence in **over 90 countries**.

In addition to video door entry systems, we design and build anti-intrusion, video surveillance, home automation, fire protection and access control systems, which makes us a single partner specialising in protecting people and their environment.

# With You. Always.

## OUR PROMISE, OUR COMMITMENT.

**All-  
encompassing  
product  
solutions.**

**Constant R&D  
investments.**

**Full sales  
and technical  
support.**


**Bespoke  
technical  
training courses.**

**CPD accredited  
training  
courses.**

**Next day  
product  
delivery.**

Being close to those who choose Comelit for their customers is our daily commitment. Our commitment is demonstrated by the fact that we are constantly researching and developing new, easy-to-install, high-performance solutions and offering daily advice and assistance on the phone and on site, as well as extremely reliable products and systems of the highest quality, supporting you step by step in your work. With You. Always. Because your success is our success and your satisfied customers are our satisfied customers.

**WITH  
YOU  
ALWAYS**

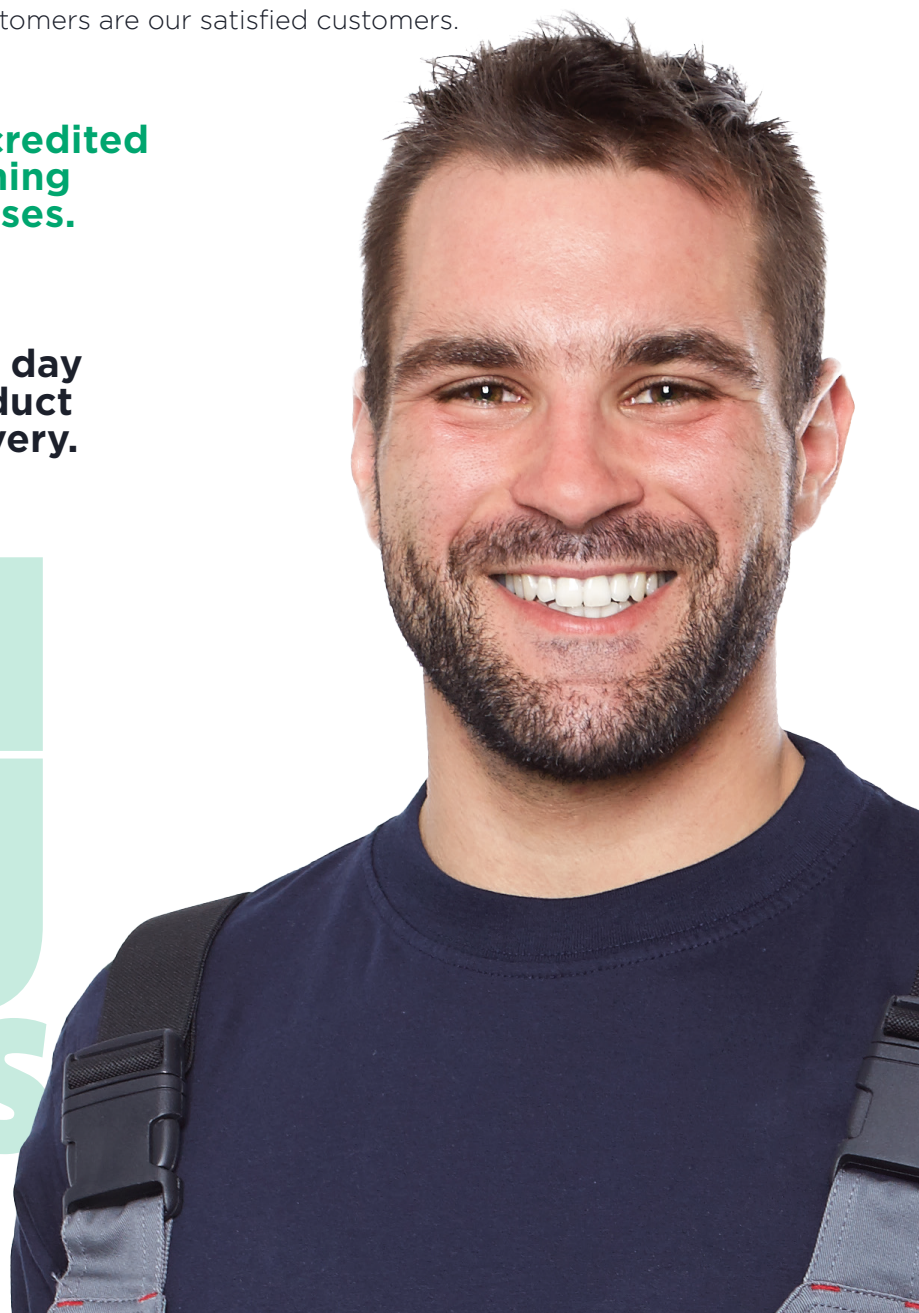



# MyComelit.


**THE APP YOU WON'T BE ABLE TO DO WITHOUT.**

Simple, straightforward and customised. Thanks to all the services provided, MyComelit makes work easier for all industry professionals: installers, draughtsmen, system integrators, security managers, building managers, wholesalers and architects



Download on the  
App Store

GET IT ON  
Google Play

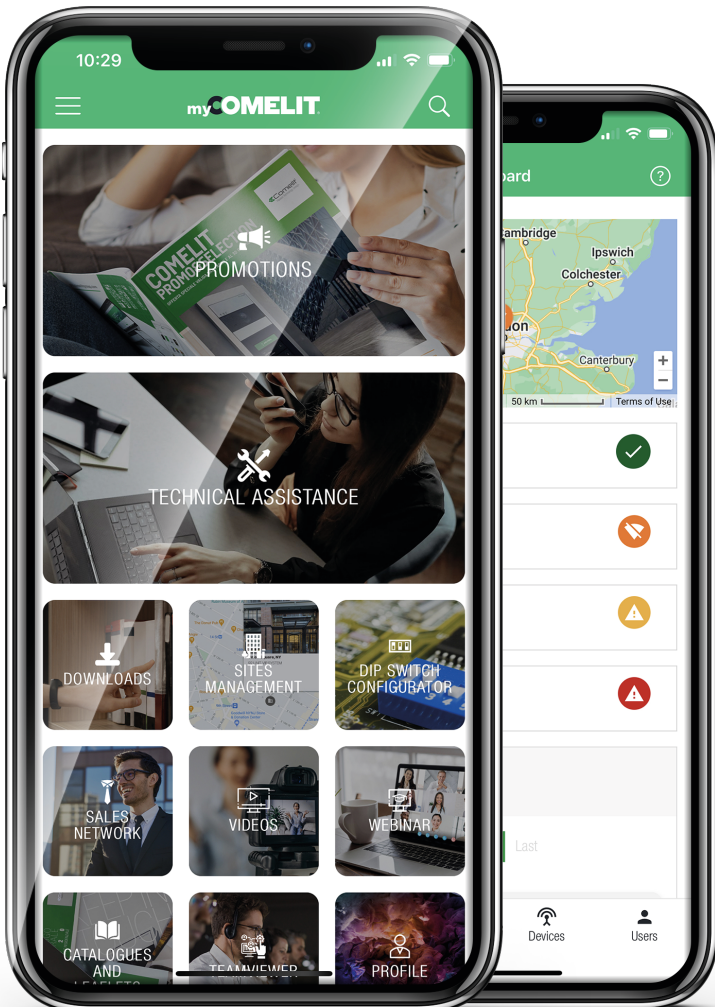



- Quickly browse through all the technical, application-related and commercial information concerning our products (catalogues, manuals, technical data sheets, etc.).
- Keep up to date with all the news we have for you: promotional offers, online and on-site training courses, services, new products and much more.
- Set up your video door entry systems in just a few steps and save them in your reserved area.
- Request technical and commercial support for designing a system.
- Manage and monitor your connected systems and receive notifications on the status of installed products to receive prompt assistance in case of anomalies.
- Edit the names of the Ultra entrance panel (in the Touch or digital Directory versions) via Bluetooth connection.

“ Do you need it now? ”



We know how valuable your time is, that's why we offer **same day quotations** and **next day delivery** across all the uk.



Notification icons: bell, battery, signal.

Camera lens

C. POZZI D. BONI	F. BORIELLO B. RODIGARI
S. ALESSI T. DI SANTIS	E. LONGHI N. DI RESTA
L. DE GAUDI P. LANZO	C. MOTTA S. VIGNOLA
E. BROGNA T. PERONI	D. MURATA F. GUIDOLIN
H. SCHNEIDER P. FERRELLI	K. JHONSON L. VAN DE BERG
J. DAWNEY J. DE LA VEGA	M. MOREAU L. D'ROZA
G. EASTLAKE M. RANDAL	R. KING E. SMITH
B. MILNER T. HOLMES	W. JACKS M. HENSON





## Designed to exceed your expectations.

Ultra is a 2-Wire and ViP **modular entrance panel** with a modern look and elegant lines, with **100% Italian design**.

DESIGN  
MILANO

Its modular nature allows the user to create an external unit to reflect his/her own image, which is capable of adapting to all requirements.

A simple rectangular shape, measuring 9.5 x 9 cm, offers a variety of composition possibilities, ranging from **audio or audio video** modules to button modules of various materials and touch technology.



Ultra is made using the **best materials**, selected after numerous studies and water, dust and impact resistance tests.

The **die-cast aluminium** frame offers high **resistance** to weathering, chemical corrosion and UV radiation.



IK08

The plastic buttons are made of a methacrylate that prevents **dulling** and **yellowing**: it is the same material used for car light clusters, ensuring extremely high resistance to heat and weathering.



IP65



## An **endless** range of combinations and possibilities.

Ultra is designed to **adapt to a multitude of applications**, from single homes to large residential complexes.

The analogue entrance panel is **perfect** for more intimate settings, such as terraced houses and small blocks of flats, and its modularity allows buttons to be added to best meet residential **needs**.

The touchscreen version, the numeric keypad (with which you can **make calls** as well as using classic lock-release codes) and the digital directory, are **ideal solutions** to easily move about even inside complexes containing hundreds of flats.



**SMALL  
RESIDENTIAL  
BUILDINGS**



**TERTIARY  
INDUSTRY**



**LARGE  
RESIDENTIAL  
BUILDINGS**



**RESIDENTIAL  
COMPLEXES**



“ **What project have you got in mind?** ”

Ultra is the perfect entrance panel for any project, thanks to its modular composition and the option of choosing between 2-wire and IP versions, which makes it easily adaptable to meet all needs: from a detached house to a large residential complex!

**WITH  
YOU  
ALWAYS**



ultra





## A technology that goes beyond logic.


WHEN we speak of **technological innovation**, Ultra's name stands out in its category, as it has introduced a true revolution in the **world of door-entry phones**.


The innovative module with number keypad can be used to enter classic **lock-release codes** and **make calls** using a code, thereby minimising the number of modules required and consequently limiting costs. It works in stand-alone mode for the opening of access points, whether paired with just the audio or audio-video module, or with other modules such as the digital directory or proximity reader modules, or in addition to the classic button keypad.

In its touchscreen version, Ultra boasts a **5-inch colour touch screen** with user-friendly graphics. Equipped with a scrolling interface such as the one of a **smartphone**, Ultra offers almost endless customisations, such as inserting your company logo next to your name and setting up a **welcome screen**. With a simple touch, you can switch from the directory to the numeric keypad to enter your personal code, and it is also equipped with an **RFID proximity reader** that allows you to open doors without using keys.

Ultra is also available in the **Digital Directory** version with **3.5-inch colour display** and backlit mechanical buttons. You can save **up to 1,500 names** with the option of **customising buttons** to make the search faster or by classifying professionals by category, such as doctors or lawyers.

The Digital Directory module works alone and **in conjunction with other modules**, such as the Number Keypad (which can be used to call the desired internal unit and to open the door using a secret code) or the modules used to read keys and proximity cards.

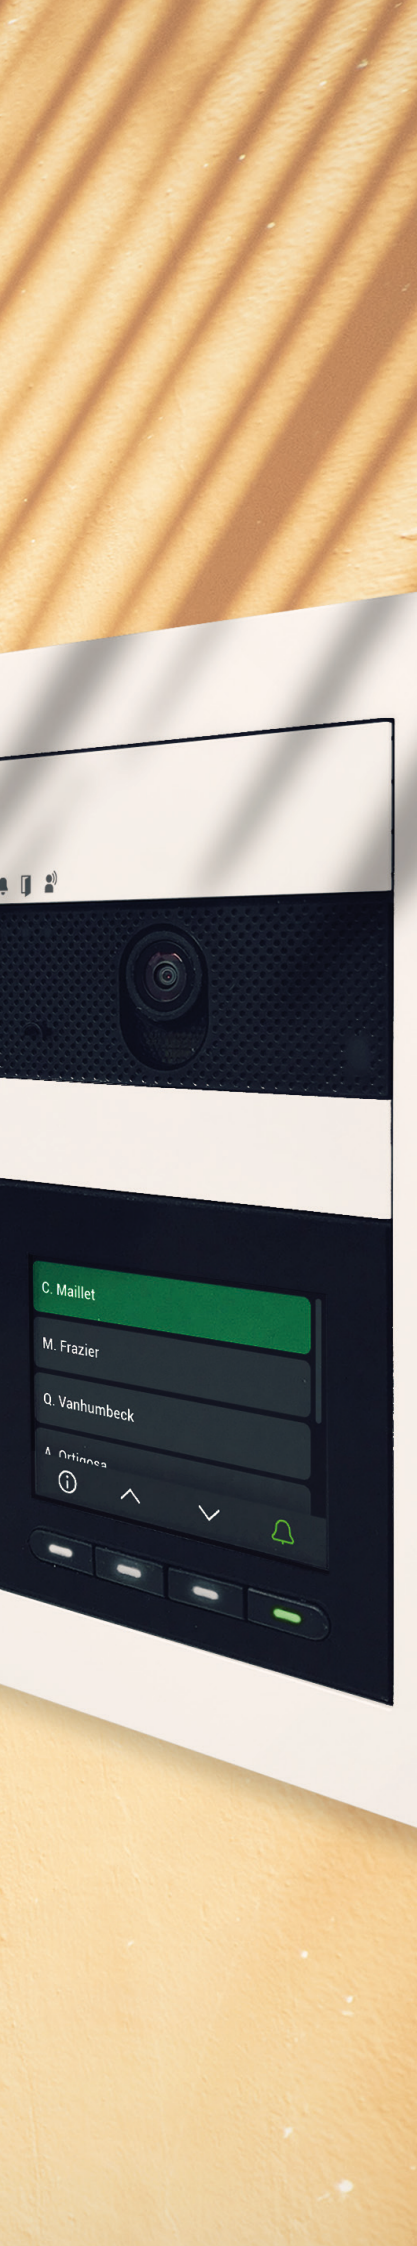

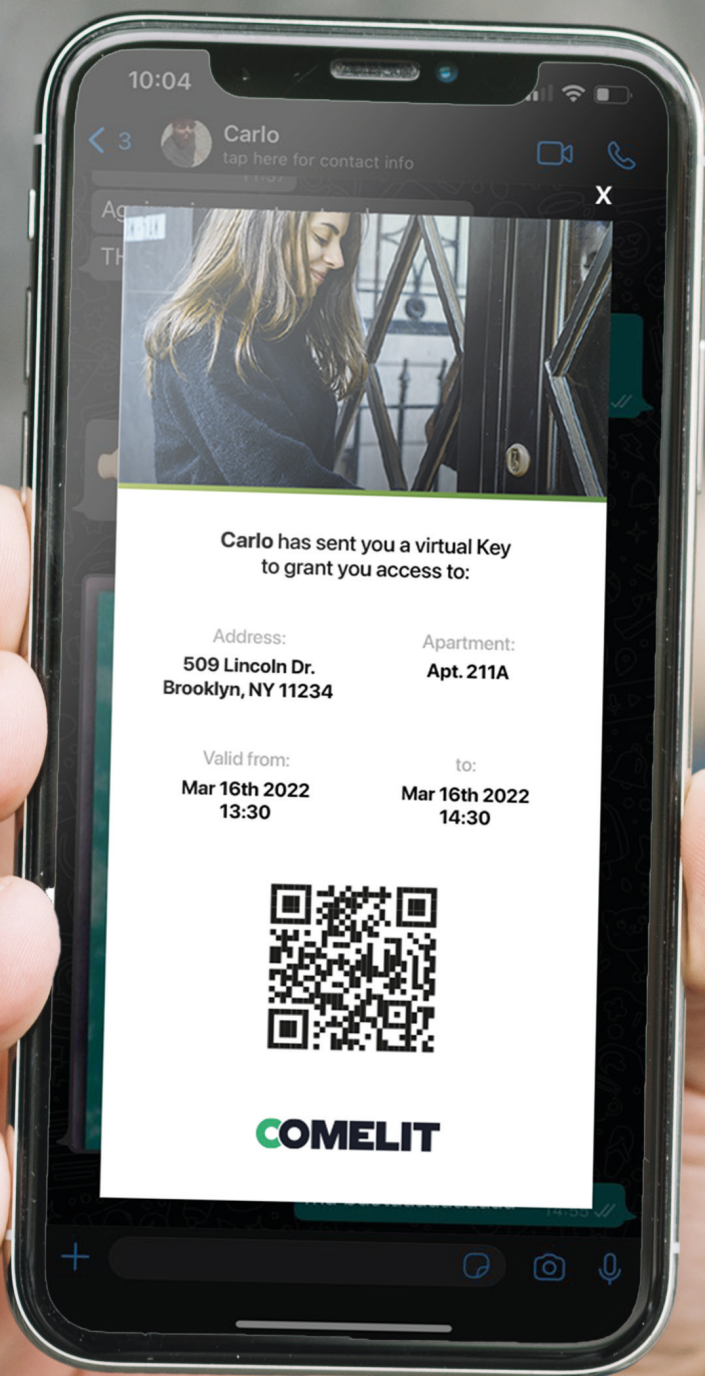


## Opening doors **handsfree.**

Are you expecting guests and don't want them to ring the doorbell one after the other? Are you away and unable to answer the dog sitter? Create virtual access keys\* for your visitors!

These codes may be classic numeric codes, which can be entered using the touchscreen entrance panel or the keypad, or QR codes, which can be scanned directly by the camera on the audio/video module.

They can be enabled for regular access or limited for a specific period of time, as in the case of a B&B guest.

### Comelit App.

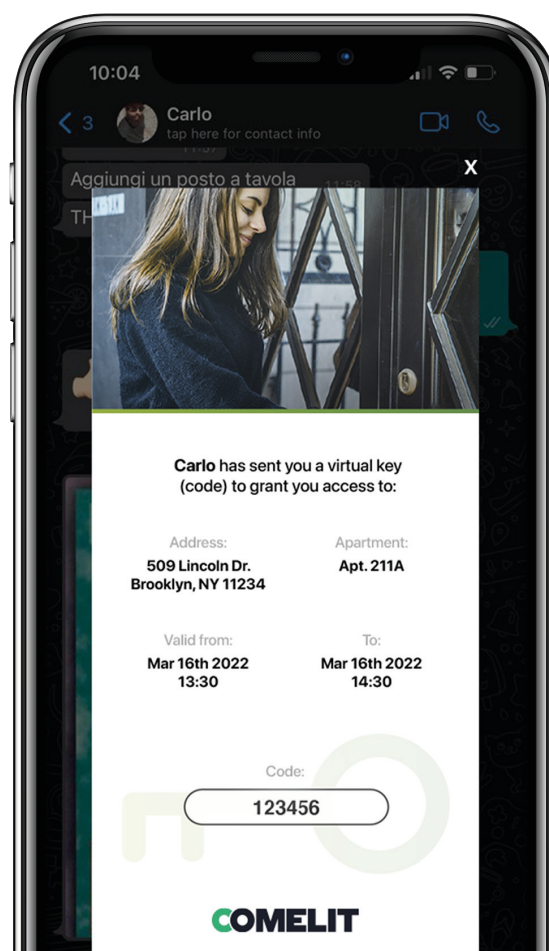

\* For IP systems only



## Three different finishes.

Ultra offers the highest degree of customisation also when it comes to blending in with its surroundings: this is why there are no less than three different colours available, including grey, a timeless classic, black for those who love elegance, and white for those seeking an entrance panel that stands out.








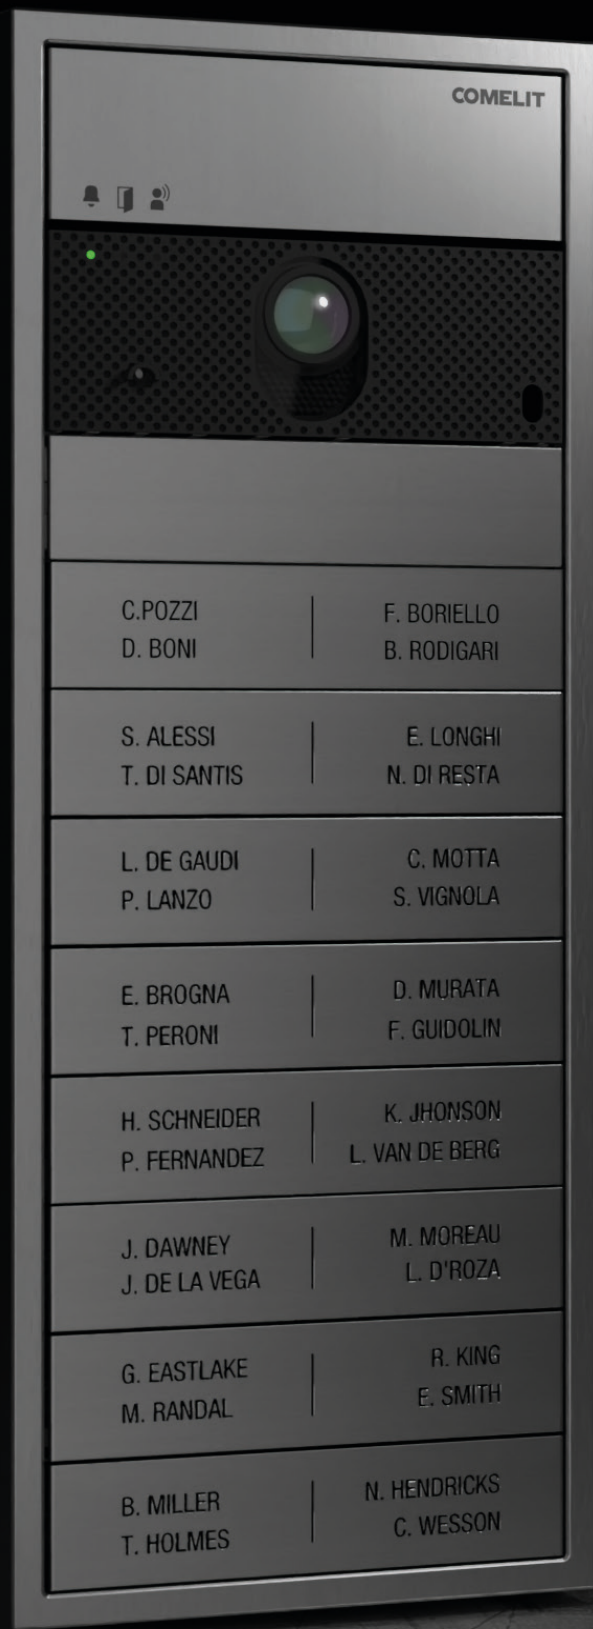
4 3 2

E. PRODI S. BONI	F. SORRELLI S. RODIGARI
S. ALZATI T. DI SANTO	E. LONGHI N. DI PESTA
L. DI SALVI P. LANZI	E. BOTTA S. VIGNOLA
E. BRIGIDA T. PERINI	G. BERTINI F. GIROLDI






Metallic Grey



Black



White

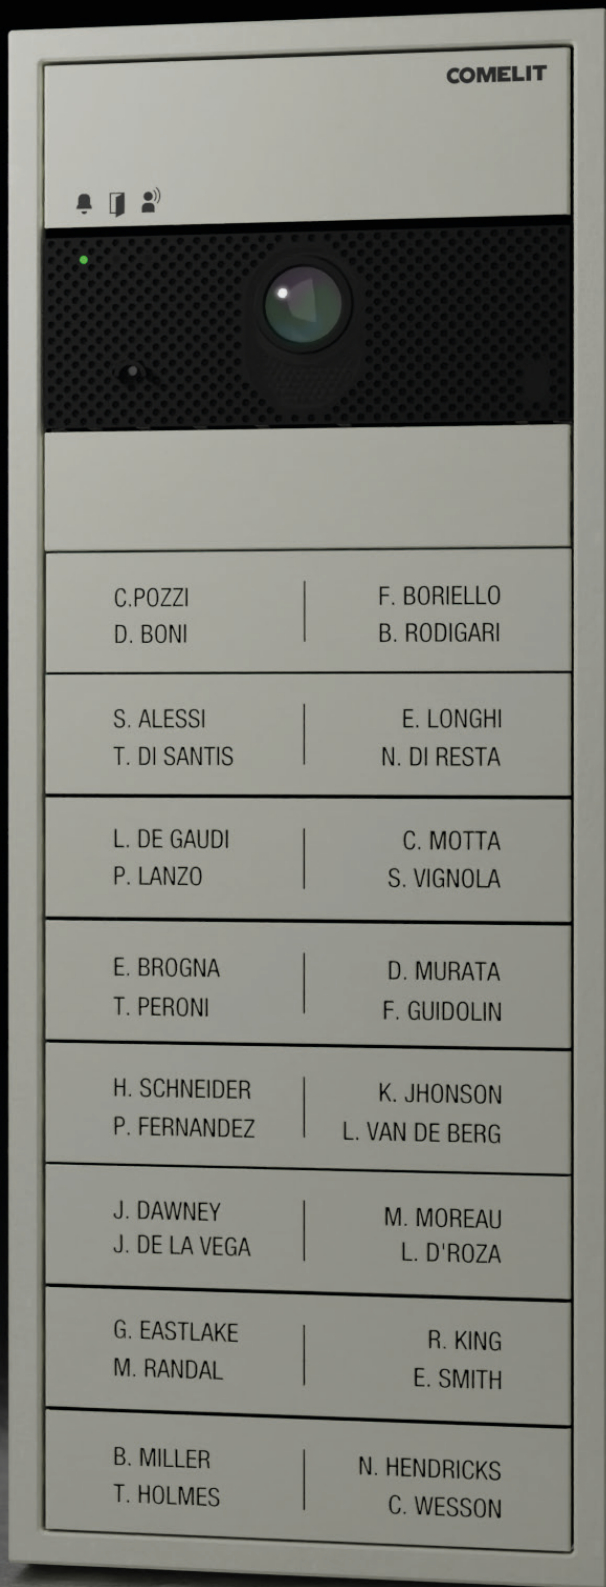







C. MOTTA  
S. VIGNOLA

P. LANZO

## There are buttons, and then there are **Ultra buttons!**

**Metal, plastic, or both:** Ultra is an entrance panel tailored to suit all tastes. Whatever material is chosen, buttons are available in **single and double** versions, depending on requirements.

All materials used have been carefully researched and selected for their high quality and field-tested to guarantee optimal durability as well as a stylish aesthetic.

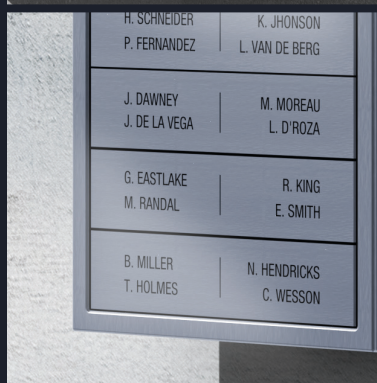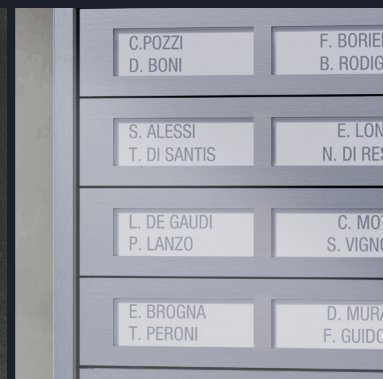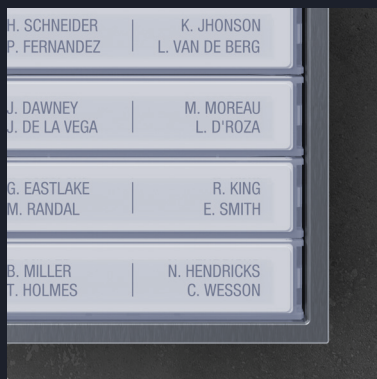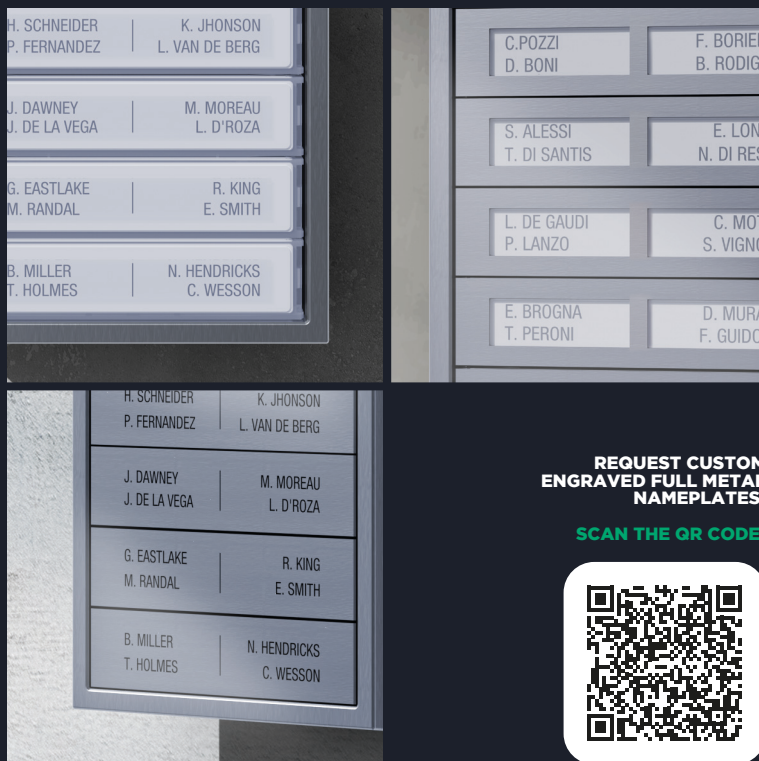



## The attention to **detail** is impressive.

Elegant and reliable, Ultra is more **powerful and discreet** than ever before. Available in two versions, surface-mounted and flush-mounted, it is the **thinnest entrance panel in its category**: It is just 10 mm thick in the flush-mounted version and 35 mm in the surface-mounted version.

Ultra has a **wide-angle camera** with a field of view of up to **160x100 degrees** and a resolution of **up to 2MP** (VIP version), which allows users to get a good view of the person and widens the field of view, therefore reducing the risks associated with scams or intrusions by eliminating blind spots. Moreover, the innovative **built-in twilight sensor** is able to recognise the different phases of the day, and therefore switches the backlighting of the camera's buttons and LED lights on and off based on actual lighting, thus saving energy and protecting the environment.

ULTRA's **double loudspeaker** and **MEMS** (Micro Electro-Mechanical Systems) omnidirectional microphone guarantee perfect and clear audio even in the worst conditions. This innovative technology makes it possible to concentrate powerful sound and a reliable system into small dimensions.

**10 mm [Flush-mounted version]**




**35 mm [Surface-mounted version]**



ultra



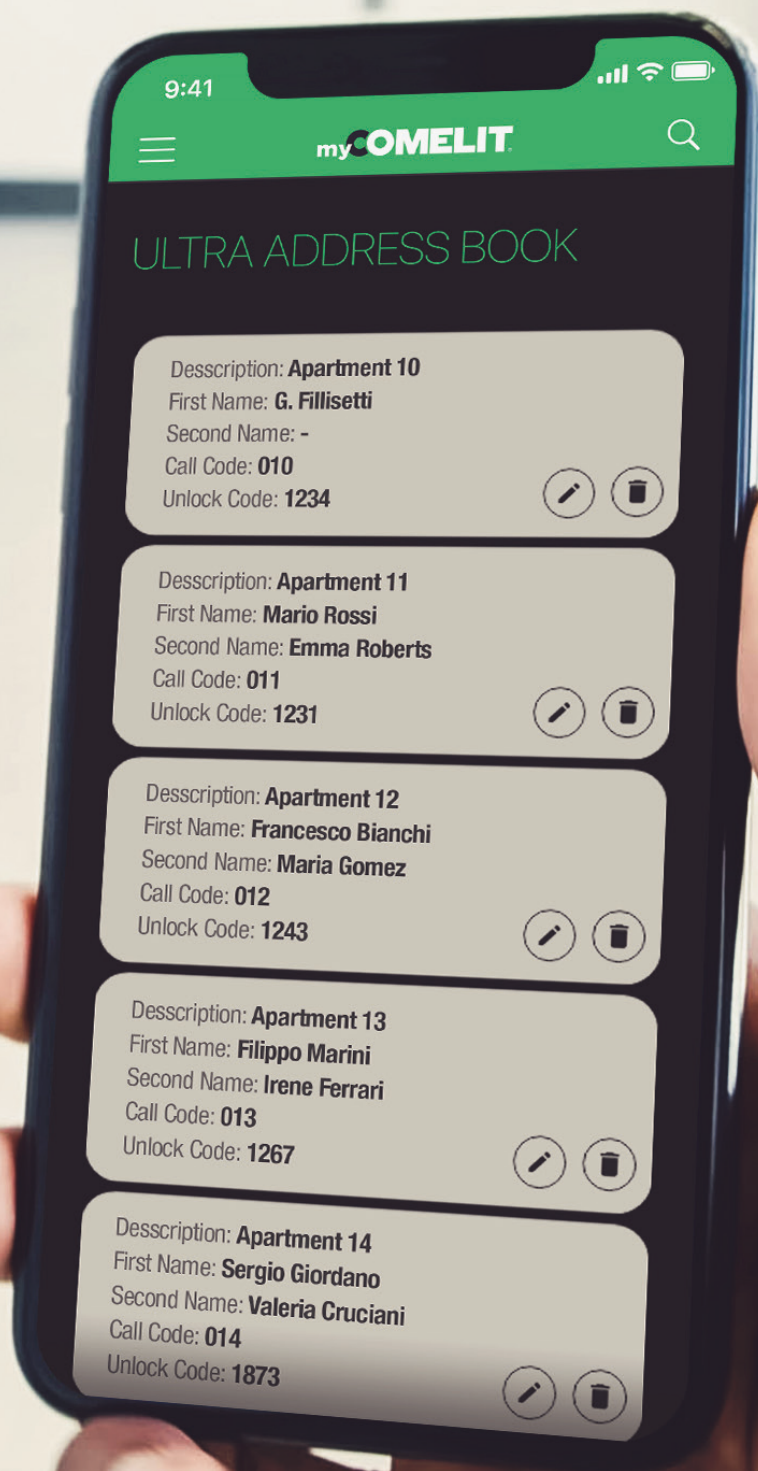




## With Ultra, the **future** is now.

Ultra is designed and built to meet the needs of both users and installers: the touchscreen and digital directory modules are equipped with **BLE** (Bluetooth Low Energy) technology, which, combined with the new **MyComelit** app, allow names to be managed in digital keypads directly from a smartphone, which makes the start-up process even more user-friendly.

The version with touchscreen module also enables the entrance panel to be programmed by ViP Manager software, not only via cable but also by connecting the PC via Bluetooth.

As for **programming the analogue buttons**, we have come up with another groundbreaking solution: all you need to do is configure the first button and press all the others in succession to complete the process.

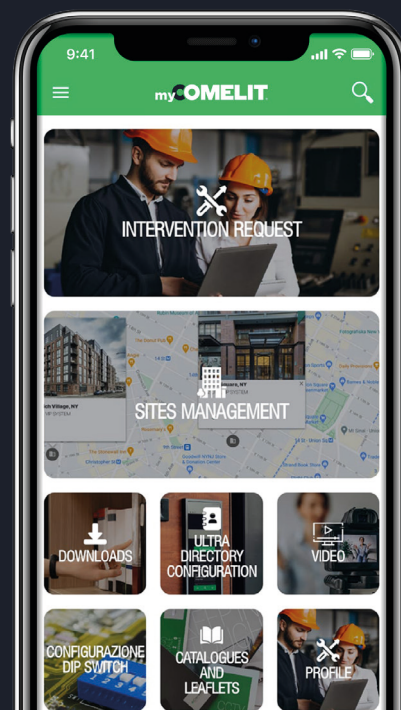



# Easy just like drinking a glass of water.

We designed Ultra with the primary objective of making installation quicker and easier.

The innovative module **coupling-uncoupling** system is easier and more secure than ever, designed to encourage interlocking construction in order to **minimise fitting times** and screwdriver usage.


The modules are interconnected by means of **flat cables** and, if they need replacing, they save each other's **programming** so that the correct configuration can be reacquired automatically.



“ Your time is valuable! ”

Time is a precious resource, and this is exactly why we designed Ultra with a special focus on simplicity and installation time. All you really need is a screwdriver!


WITH YOU ALWAYS

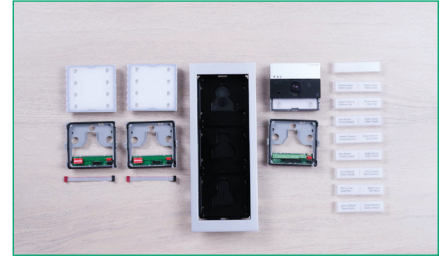

1. **ULTRA ENTRANCE PANEL** with audio/video modules, ready for installation



4. **POSITION** the surface-mounted entrance panel, guide the power supply wires through the appropriate slot and fasten it using the two screws at the top and bottom

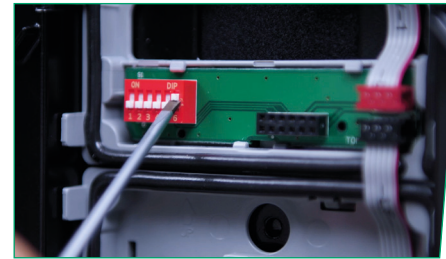

6. **CONFIGURE** the type of button that will be used (single/double) and an address in the button module



7. **ATTACH** the audio/video module, button modules and nameplates




9. **THROUGH** the dedicated selector, enter the programming mode (you know you are in the programming mode because the dedicated LED comes on) and **THROUGH** dip switch, select the first address to be assigned to the first button




12. **ATTACH** the front panel





2. REMOVE the frame and position the modules using the quick-release system

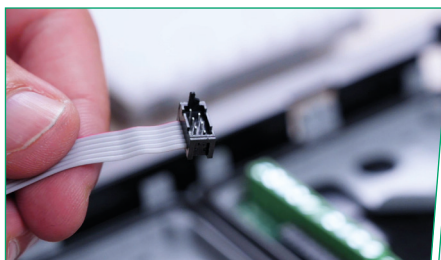

3. THE FLAT CABLE allows all modules to be easily connected and automatically configured in case of replacement

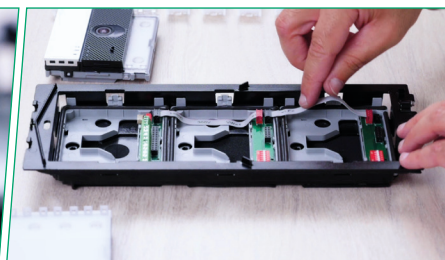



5. POWER the modules and CONNECT the door lock, if any

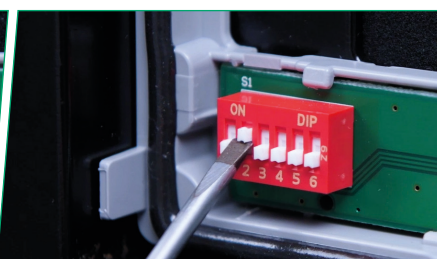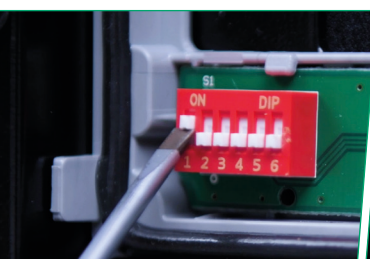


8. REMOVE the front panel to access the various programming modes/settings



10. PRESS the button to which the address selected in the previous step will be assigned. An acoustic signal sounds to confirm that the address has been correctly assigned. By SELECTING the other buttons in succession, they automatically acquire the call address with the next code

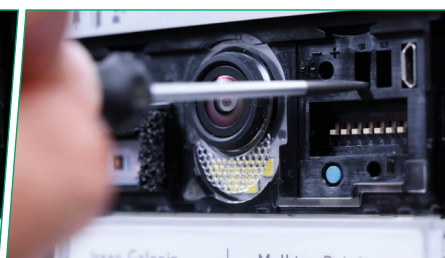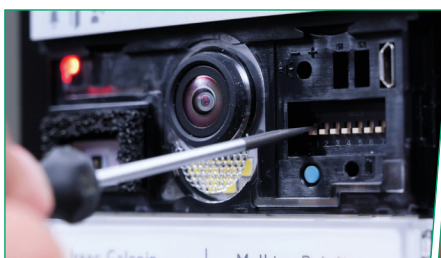

11. SET the dip switches to the initial configuration and EXIT the programming mode (you know you have exited programming because the dedicated LED turns off)

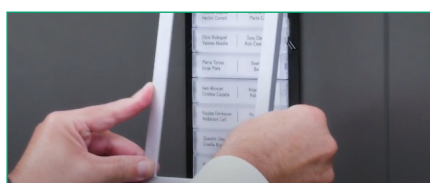

13. FIX the frame





## Technical specifications.

- Available in a flush-mounted version (10 mm deep) and compatible with all flush-mounted entrance panel boxes.
- Available in surface-mounted version just 35 mm deep.
- Die-cast aluminium frames coated using cathodolysis.
- Audio and audio/video modules for 2-wire and ViP systems.
- Protection rating IP65 and IK08.
- Call module configured for single buttons (4 calls) and double buttons (8 calls).
- Module size 95x90 mm.
- Buttons are available in 3 versions: Plastic, Metal and Full Metal.
- Caps are available in 2 versions: Plastic and Full Metal.
- Available in 3 colours: Aluminium Grey, Black RAL9005 and White RAL9010.
- Button backlighting with independent white LED adjustment on each module with automatic daytime shutdown to save energy.
- Camera LED controlled by the twilight sensor, with automatic daytime power-off for energy saving purposes.
- High-resolution wide-angle camera (field of vision 120°x90°).
- 3 signalling LEDs for: call sent (green) / system busy (red), lock-release activated, audio activated.
- Direct regulation and dip switches on the front of the Audio and Audio/Video module.
- Button address programming with Smart mode.
- Available in button version, digital directory and with touch screen module.
- Touch screen and digital directory modules with Bluetooth connection for programming functions and management of names in the directory.

Audio/Video module

Button modules





DDA indicator LED

Wide-angle camera

Dual Speaker

LED with automatic power-on

Twilight sensor

MEMS microphone


Die-cast aluminium surface-mounted frame

Buttons available in Plastic, Metal and Full Metal versions

Die-cast aluminium flush-mounted frame

Audio module

Touch module

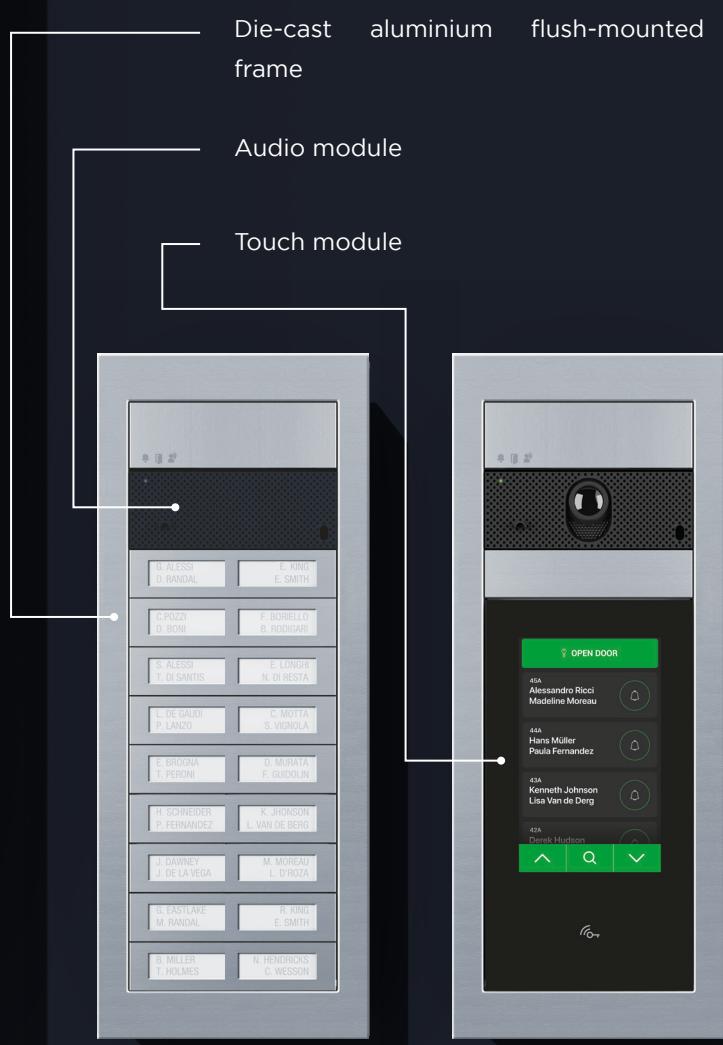

C. POZZI  
D. BONI

F. BORIELLO  
B. RODIGARI

S. ALESSI  
T. DI SANTIS

E. LONGHI  
N. DI RESTA

L. DE GAUDI  
P. LANZO

C. MOTTA  
S. VIGNOLA

E. BROGNA  
T. PERONI

D. MURATA  
F. GUIDOLIN

H. SCHNEIDER  
P. FERNANDEZ

K. JHONSON  
L. VAN DE BERG

J. DAWNEY  
J. DE LA VEGA

M. MOREAU  
L. D'ROZA

G. EASTLAKE  
M. RANDAL

R. KING  
E. SMITH

B. MILLER  
T. HOLMES

N. HENDRICKS  
C. WESSON

B. ALESSI  
T. DI SANTIS

E. KING  
E. SMITH

C. POZZI  
D. BONI

F. BORIELLO  
B. RODIGARI

S. ALESSI  
T. DI SANTIS

E. LONGHI  
N. DI RESTA

L. DE GAUDI  
P. LANZO

C. MOTTA  
S. VIGNOLA

E. BROGNA  
T. PERONI

D. MURATA  
F. GUIDOLIN

H. SCHNEIDER  
P. FERNANDEZ

K. JHONSON  
L. VAN DE BERG

J. DAWNEY  
J. DE LA VEGA

M. MOREAU  
L. D'ROZA

G. EASTLAKE  
M. RANDAL

R. KING  
E. SMITH

B. MILLER  
T. HOLMES

N. HENDRICKS  
C. WESSON

OPEN DOOR

454  
Alessandro Ricci  
Madalina Moraru


444  
Hans Müller  
Paula Fernandez

434  
Kenneth Johnson  
Lisa Van de Berg

424  
Derek Hudson




ultra

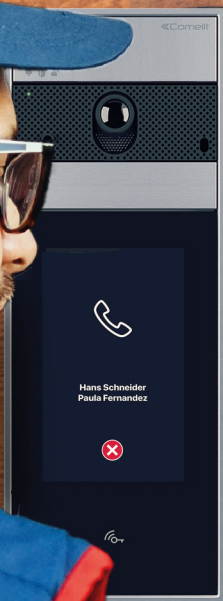

ems



# AUDIO MODULES

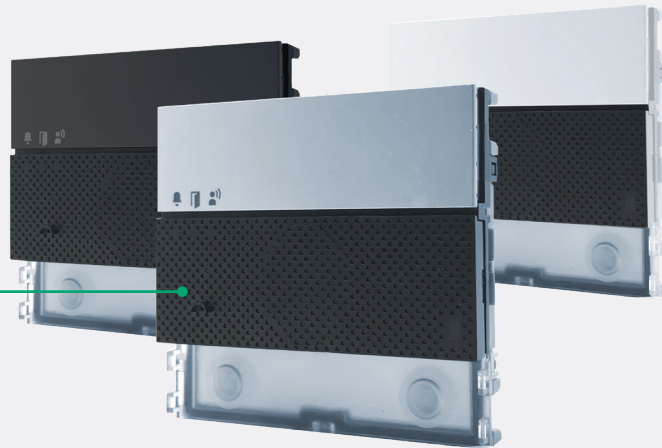

## **SIMPLEBUS1 ULTRA AUDIO MODULE**

**UT1010**  
**UT1010W**  
**UT1010B**

Audio module for Ultra entrance panel, Simplebus1 system. To be used in systems with power supply unit art. 1595 and art. 4888C. Easy to install and simple to configure, thanks to the smart programming of call buttons. Twilight sensor for automatic nameplate backlighting power-off during daytime hours. Omnidirectional digital microphone and dual loudspeaker for high-fidelity audio. Audio-visual indications for disabled individuals, assistance request can be activated via programming. Facility for 2 call buttons. To be finished with a cap, single button or double button in professional-grade plastic given an anti-yellowing and anti-dulling treatment or in aluminium. Regulation and programming without removing the module. Dimensions (L x H x D): 100 x 90 x 35 mm.

Also available in versions: **White RAL9010 (UT1010W)** and **Black RAL9005 (UT1010B)**.

## **SIMPLEBUS2 ULTRA AUDIO MODULE**

**UT2010**  
**UT2010W**  
**UT2010B**

Audio module for Ultra entrance panel, Simplebus2 system. To be used in systems with power supply unit art. 1210 / 1210A. Easy to install and simple to configure, thanks to the smart programming of call buttons. Twilight sensor for automatic nameplate backlighting power-off during daytime hours. Omnidirectional digital microphone and dual loudspeaker for high-fidelity audio. Audio-visual indications for disabled individuals, assistance request can be activated via programming. Facility for 2 call buttons. To be finished with a cap, single button or double button in professional-grade plastic given an anti-yellowing and anti-dulling treatment or in aluminium. Regulation and programming without removing the module. Dimensions (L x H x D): 100 x 90 x 35 mm.

Also available in versions: **White RAL9010 (UT2010W)** and **Black RAL9005 (UT2010B)**.

## **ULTRA IP (ViP) AUDIO MODULE**

**UT8010**  
**UT8010W**  
**UT8010B**

Audio module for Ultra entrance panel, IP (ViP) system. Twilight sensor for automatic nameplate backlighting power-off during daytime hours. Omnidirectional digital microphone and dual loudspeaker for high-fidelity audio. Audio-visual indications for disabled individuals, assistance request can be activated via programming. Facility for 2 call buttons. To be finished with a cap, single button or double button in professional-grade plastic given an anti-yellowing and anti-dulling treatment or in aluminium. Regulation and programming without removing the module. Dimensions (L x H x D): 100 x 90 x 35 mm.

Also available in versions: **White RAL9010 (UT8010W)** and **Black RAL9005 (UT8010B)**.

## **SIMPLEBUS1 ULTRA REMOTE CAMERA AUDIO MODULE**

**UT1010VC**  
**UT1010VCW**  
**UT1010VCB**

Audio module designed for connection of an analogue remote camera with PAL standard for Ultra entrance panel, Simplebus1 system. To be used in systems with power supply unit art. 1595 and art. 4888C. Easy to install and simple to configure, thanks to the smart programming of call buttons. Twilight sensor for automatic nameplate backlighting power-off during daytime hours. Omnidirectional digital microphone and dual loudspeaker for high-fidelity audio. Audio-visual indications for disabled individuals, assistance request can be activated via programming. Facility for 2 call buttons. To be finished with a cap, single button or double button in professional-grade plastic given an anti-yellowing and anti-dulling treatment or in aluminium. Regulation and programming without removing the module. Dimensions (L x H x D): 100 x 90 x 35 mm.

Also available in versions: **White RAL9010 (UT1010W)** and **Black RAL9005 (UT1010B)**.

## **SIMPLEBUS2 ULTRA REMOTE CAMERA AUDIO MODULE**

**UT2010VC**  
**UT2010VCW**  
**UT2010VCB**

Audio module designed for connection of an analogue remote camera with PAL standard for Ultra entrance panel, Simplebus2 system. To be used in systems with power supply unit art. 1210 / 1210A. Easy to install and simple to configure, thanks to the smart programming of call buttons. Twilight sensor for automatic nameplate backlighting power-off during daytime hours. Omnidirectional digital microphone and dual loudspeaker for high-fidelity audio. Audio-visual indications for disabled individuals, assistance request can be activated via programming. Facility for 2 call buttons. To be finished with a cap, single button or double button in professional-grade plastic given an anti-yellowing and anti-dulling treatment or in aluminium. Regulation and programming without removing the module. Dimensions (L x H x D): 100 x 90 x 35 mm.

Also available in versions: **White RAL9010 (UT2010VCW)** and **Black RAL9005 (UT2010VCB)**.



# AUDIO/VIDEO MODULES



## SIMPLEBUS1 ULTRA AUDIO/VIDEO MODULE

**UT1020**  
**UT1020W**  
**UT1020B**

Audio/video module for Ultra entrance panel, Simplebus 1 system. To be used in systems with power supply unit art. 1595 and art. 4888C. Easy to install and simple to configure, thanks to the smart programming of call buttons. Twilight sensor for automatic nameplate backlighting power-off during daytime hours. Omnidirectional digital microphone and dual loudspeaker for high-fidelity audio. Wide-angle colour video camera (field of vision: 120° horizontal, 90° vertical) Audio/visual aids for disabled individuals that can be activated by programming. Facility for 2 call buttons. To be finished with a cap, single button or double button in professional-grade plastic given an anti-yellowing and anti-dulling treatment or in aluminium. Regulation and programming without removing the module. Dimensions (L x H x D): 100 x 90 x 35 mm.

Also available in versions: **White RAL9010 (UT1020W)** and **Black RAL9005 (UT1020B)**.

## SIMPLEBUS2 ULTRA AUDIO/VIDEO MODULE

**UT2020**  
**UT2020W**  
**UT2020B**

Audio/video module for Ultra entrance panel, Simplebus2 system. To be used in systems with power supply unit art. 1210 / 1210A. Easy to install and simple to configure, thanks to the smart programming of call buttons. Twilight sensor for automatic nameplate backlighting power-off during daytime hours. Omnidirectional digital microphone and dual loudspeaker for high-fidelity audio. Wide-angle colour video camera (field of vision: 120° horizontal, 90° vertical) Audio/visual aids for disabled individuals that can be activated by programming. Facility for 2 call buttons. To be finished with a cap, single button or double button in professional-grade plastic given an anti-yellowing and anti-dulling treatment or in aluminium. Regulation and programming without removing the module. Dimensions (L x H x D): 100 x 90 x 35 mm.

Also available in versions: **White RAL9010 (UT2020W)** and **Black RAL9005 (UT2020B)**.

## ULTRA IP (VIP) AUDIO/VIDEO MODULE

**UT8020**  
**UT8020W**  
**UT8020B**

Audio/video module for Ultra entrance panel, IP (ViP) system. Twilight sensor for automatic nameplate backlighting power-off during daytime hours. Omnidirectional digital microphone and dual loudspeaker for high-fidelity audio. Wide-angle colour video camera (field of vision: 160° horizontal, 90° vertical) Audio/visual aids for disabled individuals that can be activated by programming. Facility for 2 call buttons. To be finished with a cap, single button or double button in professional-grade plastic given an anti-yellowing and anti-dulling treatment or in aluminium. Regulation and programming without removing the module. Dimensions (L x H x D): 100 x 90 x 35 mm.

Also available in versions: **White RAL9010 (UT8020W)** and **Black RAL9005 (UT8020B)**.



# MODULES



**UT9200**

## ULTRA CALL BUTTON MODULE

Call button module for Ultra entrance panel, compatible with all systems. With facility for 8 call buttons in professional-grade plastic given an anti-yellowing and anti-dulling treatment or in aluminium. For completion with 4 single buttons art. UT9211, UT9211M, UT9211FM (4 calls), 4 double buttons art. UT9212, UT9212M, UT9212FM (8 calls) or with caps art. UT9221, UT9221M. Automatic nameplate backlight switch-off during daytime hours via the twilight sensor for the paired audio or audio/video module. White nameplate lighting. Dimensions (L x H x D): 100 x 90 x 35 mm.



**UT9260M**

## ULTRA DIGITAL DIRECTORY MODULE WITH DISPLAY Q4 2022

Digital directory module for Ultra entrance panel, compatible with all systems. Bluetooth connection for managing names in the directory via the installer's MyComelit app. Buttons for selecting the user and the call. Option of customising a button for direct calls to the switchboard, commercial activities, activation of an opening or a light. Features a 3.5" colour graphic display. Can be used in combination with the number keypad module (rel. 1.1.0 or higher) to directly call the user when the relevant code is known, or for the access control function with activation of the audio or audio/video module outputs and the system actuators. Dimensions (L x H x D): 100 x 90 x 35 mm.



**UT9270**

## ULTRA TOUCH SCREEN MODULE

Touch screen module for Ultra entrance panel, compatible with all systems. Bluetooth connection for managing names in the directory via the installer's MyComelit app. An easy-to-use graphical user interface that allows you to customise the button interface for direct calls to the switchboard, business activities (with relevant logos), activate an opening or a light, and view general messages of each block of flats. Can be used as a number keypad module to directly call the user when the relevant code is known, or for the access control function with activation of the audio or audio/video module outputs and the system actuators. 5" capacitive display with high visibility and impact-proof glass, plus theme selection (white or black). It has a Wiegand output for interfacing with access control systems. Equipped with RFID reader for activation of an opening using keys or Comelit cards. Automatic backlight regulation via the twilight sensor for the paired audio or audio/video module. Dimensions: 2 Ultra modules.



**UT9279M**  
**UT9279MW**  
**UT9279MB**

### ULTRA NUMBER KEYPAD MODULE

Module with number keypad for Ultra entrance panel, compatible with all systems. Can be used as a module to directly call the user when the relevant code is known, and for the access control function with activation of the on-board relays and the audio or audio/video module outputs and the system actuators. The access codes can be Permanent (always valid), metered (valid for a specific number of uses) or associated with a validity date. In the latter case, each code can be assigned a start date/validity end date, dual daily time band, validity days. Up to 4 different actions can be assigned to each access code. The function enabling playback for the corresponding audio message when each button is pressed can be activated. There is also an event log containing all information (codes activated, user who used them, users called, etc.), which can store up to 1,275 events. It has a Wiegand output for interfacing with access control systems. Automatic button backlight switch-off during daytime hours via the twilight sensor for the paired audio or audio/video module. Anodised aluminium alloy coating. Dimensions (L x H x D): 100 x 90 x 35 mm.

**Also available in versions: White RAL9010 (UT9279MW) and Black RAL9005 (UT9279MB).**



**SK9000U**  
**SK9000UW**  
**SK9000UB**

### ULTRA SIMPLEKEY BASIC MODULE

SimpleKey Basic access control module for Ultra entrance panel, compatible with all systems. Equipped with RFID reader for opening activation using Comelit keys or cards. 1,500 storable electronic keys. Anodised aluminium alloy coating. Dimensions (L x H x D): 100 x 90 x 35 mm.

**Also available in versions: White RAL9010 (SK9000UW) and Black RAL9005 (SK9000UB).**



**SK9001U**  
**SK9001UW**  
**SK9001UB**

### ULTRA SIMPLEKEY ADVANCED MODULE

SimpleKey Advanced access control and control panel module for Ultra entrance panel, compatible with all systems. Equipped with RFID reader for opening activation using Comelit keys or cards. 1,500 storable electronic keys. Last 1,400 events stored. Option of creating complex multi-port systems without the need for physical connection (virtual network). Anodised aluminium alloy coating. Dimensions (L x H x D): 100 x 90 x 35 mm.

**Also available in versions: White RAL9010 (SK9001UW) and Black RAL9005 (SK9001UB).**



**UT9290M**  
**UT9290MW**  
**UT9290MB**

### ULTRA ACCESS CONTROL READER MODULE

Module designed to house third-party access control units for Ultra entrance panel. Hole 40 x 40 mm. Anodised aluminium alloy coating. Compatible with Comelit PAC panel-mounted readers. Dimensions (L x H x D): 100 x 90 x 35 mm. NOTE: you will need to check and verify the mechanical compatibility of third-party panel-mounted readers for each model!

**Also available in versions: White RAL9010 (UT9290MW) and Black RAL9005 (UT9290MB).**



**UT9240**

### ULTRA INFORMATION MODULE

Info module for Ultra entrance panel, compatible with all systems. Automatic nameplate backlight switch-off during daytime hours via the twilight sensor for the paired audio or audio/video module. White nameplate lighting. Made using polymethyl methacrylate given a treatment for resistance to UV rays while preventing yellowing and dulling. Dimensions: 1 Ultra module. Dimensions: 100x90x35 mm



**UT9240M**  
**UT9240MW**  
**UT9240MB**

### METAL ULTRA INFORMATION MODULE

Metal version info module for Ultra entrance panel, compatible with all systems. Automatic nameplate backlight switch-off during daytime hours via the twilight sensor for the paired audio or audio/video module.

White nameplate lighting. Made with aluminium trim to increase resistance to impact and polymethyl methacrylate treated to increase resistance to UV rays while preventing yellowing and dulling. Dimensions (L x H x D): 100 x 90 x 35 mm.

Also available in versions: **White RAL9010 (UT9240MW)** and **Black RAL9005 (UT9240MB)**.



**UT9240FM**

### FULL METAL ULTRA INFO MODULE Q4 2022

Full Metal version info module for Ultra control panels, compatible with all systems. Text engraving at the user's expense. Automatic backlight switch-off during daytime hours via the twilight sensor for the paired audio or audio/video module. White lighting. Made with aluminium trim to increase resistance to impact and polymethyl methacrylate treated to increase resistance to UV rays while preventing yellowing and dulling. Dimensions: 100x90x35 mm



**UT9230M**  
**UT9230MW**  
**UT9230MB**

### METAL ULTRA BLANK MODULE

Metal version blank module for Ultra entrance panels. Anodised aluminium alloy coating. Dimensions (L x H x D): 100 x 90 x 35 mm.

Also available in versions: **White RAL9010 (UT9230MW)** and **Black RAL9005 (UT9230MB)**.

## BUTTONS



**UT9211**

### SINGLE ULTRA BUTTON

Single button for Ultra entrance panel. Made using polymethyl methacrylate given a treatment for resistance to UV rays while preventing yellowing and dulling. Double nameplate (blank and with chime symbol) supplied. Easy nameplate replacement.



**UT9213**

### SINGLE ULTRA WIDE BUTTON Q4 2022

Single wide button for Ultra entrance panel. For use with push-button module art. UT9201. Made using polymethyl methacrylate given a treatment for resistance to UV rays while preventing yellowing and dulling. Double nameplate (blank and with chime symbol) supplied. Easy nameplate replacement.



**UT9214**

### DOUBLE-HEIGHT ULTRA PUSH-BUTTON Q4 2022

Double-height button for Ultra entrance panel. For use with push-button module art. UT9201. Made using polymethyl methacrylate given a treatment for resistance to UV rays while preventing yellowing and dulling. Double nameplate (blank and with chime symbol) supplied. Easy nameplate replacement.



**UT9212**

**DOUBLE ULTRA BUTTON**

Double button for Ultra entrance panel. Made using polymethyl methacrylate given a treatment for resistance to UV rays while preventing yellowing and dulling. Double nameplate (blank and with chime symbol) supplied. Easy nameplate replacement.



**UT9211M  
UT9211MW  
UT9211MB**

**SINGLE METAL ULTRA BUTTON**

Metal version single button for Ultra entrance panel. Made with aluminium trim to increase resistance to impact and polymethyl methacrylate treated to increase resistance to UV rays while preventing yellowing and dulling. Double nameplate (blank and with chime symbol) supplied. Easy nameplate replacement. **Also available in versions: White RAL9010 (UT9211MW) and Black RAL9005 (UT9211MB).**



**UT9212M  
UT9212MW  
UT9212MB**

**DOUBLE METAL ULTRA BUTTON**

Metal version double button for Ultra entrance panel. Made with aluminium trim to increase resistance to impact and polymethyl methacrylate treated to increase resistance to UV rays while preventing yellowing and dulling. Double nameplate (blank and with divider symbol) supplied. Easy nameplate replacement. **Also available in versions: White RAL9010 (UT9212MW) and Black RAL9005 (UT9212MB).**



**UT9211FM**

**SINGLE FULL METAL ULTRA BUTTON**

Full-Metal version single button for Ultra entrance panel. Made with aluminium coating to increase resistance to impact and polymethyl methacrylate treated to increase resistance to UV rays while preventing yellowing and dulling.



**UT9212FM**

**DOUBLE FULL METAL ULTRA BUTTON**

Full Metal version double button for Ultra entrance panel. Made with aluminium coating to increase resistance to impact and polymethyl methacrylate treated to increase resistance to UV rays while preventing yellowing and dulling.



**UT9221**

**PLASTIC ULTRA CAP**

Cap for Ultra entrance panel. Made using polymethyl methacrylate given a treatment for resistance to UV rays while preventing yellowing and dulling.



**UT9222**

**ULTRA DOUBLE-HEIGHT PLASTIC CAP Q4 2022**

Double-height cap for Ultra entrance panel. Made using polymethyl methacrylate given a treatment for resistance to UV rays while preventing yellowing and dulling.



**UT9223**

**ULTRA TRIPLE-HEIGHT PLASTIC CAP Q4 2022**

Triple-height cap for Ultra entrance panel. Made using polymethyl methacrylate given a treatment for resistance to UV rays while preventing yellowing and dulling.



**UT9221M  
UT9221MW  
UT9221MB**

**ULTRA FULL METAL CAP**

Full Metal version cap for Ultra entrance panel. Made with aluminium coating to increase resistance to impact and polymethyl methacrylate treated to increase resistance to UV rays while preventing yellowing and dulling. **Also available in versions: White RAL9010 (UT9221MW) and Black RAL9005 (UT9221MB).**



**UT9222M**

**ULTRA DOUBLE-HEIGHT FULL METAL CAP Q4 2022**

Double-height, Full Metal version cap for Ultra entrance panel. Made with aluminium coating to increase resistance to impact and polymethyl methacrylate treated to increase resistance to UV rays while preventing yellowing and dulling.




**UT9223M**

**ULTRA TRIPLE-HEIGHT FULL METAL CAP Q4 2022**

Triple-height, Full Metal version cap for Ultra entrance panel. Made with aluminium coating to increase resistance to impact and polymethyl methacrylate treated to increase resistance to UV rays while preventing yellowing and dulling.



# PRE-ENGRAVED FULL METAL BUTTONS

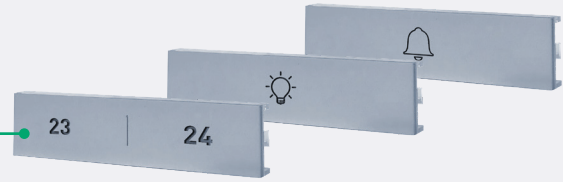

**UT9212FM/12**  
Engraving: 1-2

**UT9212FM/34**  
Engraving: 3-4

**UT9212FM/56**  
Engraving: 5-6

**UT9212FM/78**  
Engraving: 7-8

**UT9212FM/910**  
Engraving: 9-10

**UT9212FM/1112**  
Engraving: 11-12

**UT9212FM/1314**  
Engraving: 13-14

**UT9212FM/1516**  
Engraving: 15-16

**UT9212FM/1718**  
Engraving: 17-18

**UT9212FM/1920**  
Engraving: 19-20

**UT9212FM/2122**  
Engraving: 21-22

**UT9212FM/2324**  
Engraving: 23-24

**UT9212FM/2526**  
Engraving: 25-26

**UT9212FM/2728**  
Engraving: 27-28

**UT9212FM/2930**  
Engraving: 29-30

**UT9212FM/3132**  
Engraving: 31-32

**UT9212FM/1PAB**  
Engraving: 1°A - 1°B

**UT9212FM/2PAB**  
Engraving: 2°A - 2°B

**UT9212FM/3PAB**  
Engraving: 3°A - 3°B

**UT9212FM/4PAB**  
Engraving: 4°A - 4°B

**UT9212FM/5PAB**  
Engraving: 5°A - 5°B

**UT9212FM/6PAB**  
Engraving: 6°A - 6°B

**UT9212FM/7PAB**  
Engraving: 7°A - 7°B

**UT9212FM/8PAB**  
Engraving: 8°A - 8°B

**UT9212FM/9PAB**  
Engraving: 9°A - 9°B

**UT9212FM/10PAB**  
Engraving: 10°A - 10°B

**UT9212FM/11PAB**  
Engraving: 11°A - 11°B

**UT9212FM/12PAB**  
Engraving: 12°A - 12°B

**UT9212FM/1PCD**  
Engraving: 1°C - 1°D

**UT9212FM/2PCD**  
Engraving: 2°C - 2°D

**UT9212FM/3PCD**  
Engraving: 3°C - 3°D

**UT9212FM/4PCD**  
Engraving: 4°C - 4°D

**UT9212FM/5PCD**  
Engraving: 5°C - 5°D

**UT9212FM/6PCD**  
Engraving: 6°C - 6°D

**UT9212FM/7PCD**  
Engraving: 7°C - 7°D

**UT9212FM/8PCD**  
Engraving: 8°C - 8°D

**UT9212FM/9PCD**  
Engraving: 9°C - 9°D

**UT9212FM/10PCD**  
Engraving: 10°C - 10°D

**UT9212FM/11PCD**  
Engraving: 11°C - 11°D

**UT9212FM/12PCD**  
Engraving: 12°C - 12°D

**UT9211FM/LM**  
Ultra single full-metal light-me button

**UT9211FM/BE**  
Ultra single full metal Chime button

# FLUSH-MOUNTED ACCESSORIES



**UT9161**  
**UT9161W**  
**UT9161B**

## FLUSH-MOUNTED FRAME FOR 1 ULTRA MODULE

1-module flush-mounted frame for Ultra entrance panel, colour silver RAL9006. Consists of a metal support that secures the modules without using screws and with a finishing frame in die-cast aluminium given a cataphoresis treatment to increase its resistance to chemical and environmental corrosion, including damage from UV rays. 10 mm protrusion from the wall. It can be used on flush-mounted boxes Art. 3110/1 and 3110/1A with the option of placing several modules side by side horizontally. Dimensions (L x H x D): 125.5 x 136 x 35 mm.

Also available in versions: **White RAL9010 (UT9161W)** and **Black RAL9005 (UT9161B)**.



**UT9162**  
**UT9162W**  
**UT9162B**

## FLUSH-MOUNTED FRAME FOR 2 ULTRA MODULES

2-module flush-mounted frame for Ultra entrance panel, colour silver RAL9006. Consists of a metal support that secures the modules without using screws and with a finishing frame in die-cast aluminium given a cataphoresis treatment to increase its resistance to chemical and environmental corrosion, including damage from UV rays. 10 mm protrusion from the wall. It can be used on flush-mounted boxes Art. 3110/2 and 3110/2A with the option of placing several modules side by side horizontally. Dimensions (L x H x D): 125.5 x 226.5 x 35 mm.

Also available in versions: **White RAL9010 (UT9162W)** and **Black RAL9005 (UT9162B)**.



**UT9163**  
**UT9163W**  
**UT9163B**

## FLUSH-MOUNTED FRAME FOR 3 ULTRA MODULES

3-module flush-mounted frame for Ultra entrance panel, colour silver RAL9006. Consists of a metal support that secures the modules without using screws and with a finishing frame in die-cast aluminium given a cataphoresis treatment to increase its resistance to chemical and environmental corrosion, including damage from UV rays. 10 mm protrusion from the wall. It can be used on flush-mounted boxes Art. 3110/3 and 3110/3A with the option of placing several modules side by side horizontally. Dimensions (L x H x D): 125.5 x 317.5 x 35 mm.

Also available in versions: **White RAL9010 (UT9163W)** and **Black RAL9005 (UT9163B)**.



**UT9164**  
**UT9164W**  
**UT9164B**

## FLUSH-MOUNTED FRAME FOR 4 ULTRA MODULES

4-module flush-mounted frame for Ultra entrance panel, colour silver RAL9006. Consists of a metal support that secures the modules without using screws and with a finishing frame in die-cast aluminium given a cataphoresis treatment to increase its resistance to chemical and environmental corrosion, including damage from UV rays. 10 mm protrusion from the wall. It can be used on flush-mounted boxes Art. 3110/4 and 3110/4A with the option of placing several modules side by side horizontally. Dimensions (L x H x D): 125.5 x 408 x 35 mm.

Also available in versions: **White RAL9010 (UT9164W)** and **Black RAL9005 (UT9164B)**.



**UT9181**  
**UT9181W**  
**UT9181B**

**RAIN SHIELD FLUSH-MOUNTED 1 MODEL ULTRA**

Rain shield for flush-mounted frames, 1 module, for Ultra entrance panel. Made of grey-coloured anodised aluminium. Dimensions (L x H x D): 132 x 141 x 32 mm.

Also available in versions: **White RAL9010 (UT9181W)** and **Black RAL9005 (UT9181B)**.

**UT9182**  
**UT9182W**  
**UT9182B**

**RAIN SHIELD FLUSH-MOUNTED 2 MODULES ULTRA**

Rain shield for flush-mounted frames, 2 modules, for Ultra entrance panel. Made of grey-coloured anodised aluminium. Dimensions (L x H x D): 132 x 232 x 32 mm.

Also available in versions: **White RAL9010 (UT9182W)** and **Black RAL9005 (UT9182B)**.

**UT9183**  
**UT9183W**  
**UT9183B**

**RAIN SHIELD FLUSH-MOUNTED 3 MODULES ULTRA**

Rain shield for flush-mounted frames, 3 modules, for Ultra entrance panel. Made of grey-coloured anodised aluminium. Dimensions (L x H x D): 132 x 322 x 32 mm.

Also available in versions: **White RAL9010 (UT9183W)** and **Black RAL9005 (UT9183B)**.

**UT9184**  
**UT9184W**  
**UT9184B**

**RAIN SHIELD FLUSH-MOUNTED 4 MODULES ULTRA**

Rain shield for flush-mounted frames, 4 modules, for Ultra entrance panel. Made of grey-coloured anodised aluminium. Dimensions (L x H x D): 132 x 413 x 32 mm.

Also available in versions: **White RAL9010 (UT9184W)** and **Black RAL9005 (UT9184B)**.

**UT9184H**

**RAIN SHIELD FLUSH-MOUNTED 2X2 MODULES ULTRA**

Rain shield for flush-mounted frame, 4 modules (2 supports of 2 side-by-side modules), for Ultra entrance panel.

Made of grey-coloured anodised aluminium. Dimensions (L x H x D): 259 x 232 x 32 mm.

**UT9186**

**RAIN SHIELD FLUSH-MOUNTED 6 MODULES ULTRA**

Rain shield for flush-mounted frame, 6 modules (2 supports of 3 side-by-side modules), for Ultra entrance panel.

Made of grey-coloured anodised aluminium. Dimensions (L x H x D): 259 x 322 x 32 mm.

**UT9188**

**RAIN SHIELD FLUSH-MOUNTED 8 MODULES ULTRA**

Rain shield for flush-mounted frame, 8 modules (2 supports of 4 side-by-side modules), for Ultra entrance panel.

Made of grey-coloured anodised aluminium. Dimensions (L x H x D): 259 x 413 x 32 mm.

**UT9189**

**RAIN SHIELD FLUSH-MOUNTED 9 MODULES ULTRA**

Rain shield for flush-mounted frame, 9 modules (3 supports of 3 side-by-side modules), for Ultra entrance panel.

Made of grey-coloured anodised aluminium. Dimensions (L x H x D): 386 x 322 x 32 mm.





31141

**FLUSH-MOUNTED FINISHING FRAME, 1 MODULE, FOR ENTRANCE PANELS**

Natural anodised aluminium finishing frame, 1 module. Dimensions (L x H x D): 149 x 149 x 3 mm.

31142

**FLUSH-MOUNTED FINISHING FRAME, 2 MODULES, FOR ENTRANCE PANELS**

Natural anodised aluminium finishing frame, 2 modules. Dimensions (L x H x D): 149 x 239 x 3 mm

31143

**FLUSH-MOUNTED FINISHING FRAME, 3 MODULES, FOR ENTRANCE PANELS**

Natural anodised aluminium finishing frame, 3 modules. Dimensions (L x H x D): 149 x 329 x 3 mm

31144L

**FLUSH-MOUNTED FINISHING FRAME, 4 MODULES, FOR ENTRANCE PANELS**

Natural anodised aluminium finishing frame, 4 vertically-aligned modules. Dimensions (L x H x D): 149 x 419 x 3 mm

31144

**FLUSH-MOUNTED FINISHING FRAME, 2X2 MODULES, FOR ENTRANCE PANELS**

Natural anodised aluminium finishing frame, 4 modules. Dimensions (L x H x D): 276 x 239 x 3 mm

31146

**FLUSH-MOUNTED FINISHING FRAME, 2X3 MODULES, FOR ENTRANCE PANELS**

Natural anodised aluminium finishing frame, 6 modules. Dimensions (L x H x D): 276 x 329 x 3 mm

31149

**FLUSH-MOUNTED FINISHING FRAME, 3X3 MODULES, FOR ENTRANCE PANELS**

Natural anodised aluminium finishing frame, 9 modules. Dimensions (L x H x D): 403 x 329 x 3 mm

3110/1A

**FLUSH-MOUNTED BOX FOR 1 ULTRA MODULE**

Flush-mounted box for external 1-module entrance panels. Can also be installed on plasterboard walls (using optional accessories). Dimensions (L x H x D): 123.5 x 122.5 x 50 mm.

3110/2A

**FLUSH-MOUNTED BOX FOR 2 ULTRA MODULES**

Flush-mounted box for 2-module external entrance panels. Can also be installed on plasterboard walls (using optional accessories). Dimensions (L x H x D): 123.5 x 212.5 x 50 mm.

3110/3A

**FLUSH-MOUNTED BOX FOR 3 ULTRA MODULES**

Flush-mounted box for 3-module external entrance panels. Can also be installed on plasterboard walls (using optional accessories). Dimensions (L x H x D): 123.5 x 302.5 x 50 mm.

3110/4A

**FLUSH-MOUNTED BOX FOR 4 ULTRA MODULES**

Flush-mounted box for 4-module external entrance panels. Can also be installed on plasterboard walls (using optional accessories). Dimensions (L x H x D): 123.5 x 392.5 x 50 mm.





# SURFACE-MOUNTED ACCESSORIES



**UT9171**  
**UT9171W**  
**UT9171B**

## WALL HOUSING FOR 1 ULTRA MODULE

1-module wall housing for Ultra entrance panel, colour silver RAL9006. Consists of a metal support that secures the modules without using screws and with a finishing frame in die-cast aluminium given a cataphoresis treatment to increase its resistance to chemical and environmental corrosion, including damage from UV rays. Just 35 mm protrusion from the wall.

Dimensions (L x H x D): 110 x 107 x 35 mm.

Also available in versions: **White RAL9010 (UT9171W)** and **Black RAL9005 (UT9171B)**.



**UT9172**  
**UT9172W**  
**UT9172B**

## WALL HOUSING FOR 2 ULTRA MODULES

2-module wall housing for Ultra entrance panel, colour silver RAL9006. Consists of a metal support that secures the modules without using screws and with a finishing frame in die-cast aluminium given a cataphoresis treatment to increase its resistance to chemical and environmental corrosion, including damage from UV rays. Just 35 mm protrusion from the wall.

Dimensions (L x H x D): 110x198x35mm.

Also available in versions: **White RAL9010 (UT9172W)** and **Black RAL9005 (UT9172B)**.



**UT9173**  
**UT9173W**  
**UT9173B**

## WALL HOUSING FOR 3 ULTRA MODULES

3-module wall housing for Ultra entrance panel, colour silver RAL9006. Consists of a metal support that secures the modules without using screws and with a finishing frame in die-cast aluminium given a cataphoresis treatment to increase its resistance to chemical and environmental corrosion, including damage from UV rays. Just 35 mm protrusion from the wall.

Dimensions (L x H x D): 110 x 289 x 35 mm.

Also available in versions: **White RAL9010 (UT9173W)** and **Black RAL9005 (UT9173B)**.



**UT9174**  
**UT9174W**  
**UT9174B**

## WALL HOUSING FOR 4 ULTRA MODULES

4-module wall housing for Ultra entrance panel, colour silver RAL9006. Consists of a metal support that secures the modules without using screws and with a finishing frame in die-cast aluminium given a cataphoresis treatment to increase its resistance to chemical and environmental corrosion, including damage from UV rays. Just 35 mm protrusion from the wall.

Dimensions (L x H x D): 110 x 380 x 35 mm.

Also available in versions: **White RAL9010 (UT9174W)** and **Black RAL9005 (UT9174B)**.

**UT9174H****WALL HOUSING 2X2 ULTRA MODULES**

4-module wall housing (2 supports of 2 side-by-side modules) for Ultra entrance panel, colour silver RAL9006. Consists of a metal support that secures the modules without using screws and with a finishing frame in die-cast aluminium given a cataphoresis treatment to increase its resistance to chemical and environmental corrosion, including damage from UV rays. Just 35 mm protrusion from the wall. The cable for connecting the modules side by side is supplied.  
Dimensions (L x H x D): 221 x 198 x 35 mm.

**UT9176****WALL HOUSING FOR 6 ULTRA MODULES**

6-module wall housing (2 supports of 3 side-by-side modules) for Ultra entrance panel, colour silver RAL9006. Consists of a metal support that secures the modules without using screws and with a finishing frame in die-cast aluminium given a cataphoresis treatment to increase its resistance to chemical and environmental corrosion, including damage from UV rays. Just 35 mm protrusion from the wall. The cable for connecting the modules side by side is supplied.  
Dimensions (L x H x D): 221 x 289 x 35 mm.

**UT9178****WALL HOUSING FOR 8 ULTRA MODULES**

8-module wall housing (2 supports of 4 side-by-side modules) for Ultra entrance panel, colour silver RAL9006. Consists of a metal support that secures the modules without using screws and with a finishing frame in die-cast aluminium given a cataphoresis treatment to increase its resistance to chemical and environmental corrosion, including damage from UV rays. Just 35 mm protrusion from the wall. The cable for connecting the modules side by side is supplied.  
Dimensions (L x H x D): 221 x 380 x 35 mm.

**UT9179****WALL HOUSING FOR 9 ULTRA MODULES**

9-module wall housing (3 supports of 3 side-by-side modules) for Ultra entrance panel, colour silver RAL9006. Consists of a metal support that secures the modules without using screws and with a finishing frame in die-cast aluminium given a cataphoresis treatment to increase its resistance to chemical and environmental corrosion, including damage from UV rays. Just 35 mm protrusion from the wall. The cable for connecting the modules side by side is supplied.  
Dimensions (L x H x D): 332 x 289 x 35 mm.

**3649/1****HOUSING FOR 45° ENTRANCE PANEL TILT, 1 MODULE**

Housing for 45° entrance panel tilt, 1 module. Dimensions 183x130x100 mm

**3649/2****HOUSING FOR 45° ENTRANCE PANEL TILT, 2 MODULES**

Housing for 45° entrance panel tilt, 2 modules. Dimensions 183x242x100 mm

**3649/3****HOUSING FOR 45° ENTRANCE PANEL TILT, 3 MODULES**

Housing for 45° entrance panel tilt, 3 modules. Dimensions 183x354x100 mm



**UT9191**  
**UT9191W**  
**UT9191B**

**RAIN SHIELD FLUSH-MOUNTED 1 MODULE ULTRA**

Rain shield for wall housing, 1 module, for Ultra entrance panel. Made of grey-coloured anodised aluminium. Dimensions (L x H x D): 116 x 112 x 57 mm.

Also available in versions: **White RAL9010 (UT9191W)** and **Black RAL9005 (UT9191B)**.

**UT9192**  
**UT9192W**  
**UT9192B**

**RAIN SHIELD WALL HOUSING 2 MODULES ULTRA**

Rain shield for wall housing, 2 modules, for Ultra entrance panel. Made of grey-coloured anodised aluminium. Dimensions (L x H x D): 116 x 203 x 57 mm.

Also available in versions: **White RAL9010 (UT9192W)** and **Black RAL9005 (UT9192B)**.

**UT9193**  
**UT9193W**  
**UT9193B**

**RAIN SHIELD WALL HOUSING 3 MODULES ULTRA**

Rain shield for wall housing, 3 modules, for Ultra entrance panel. Made of grey-coloured anodised aluminium. Dimensions (L x H x D): 116 x 293 x 57 mm.

Also available in versions: **White RAL9010 (UT9193W)** and **Black RAL9005 (UT9193B)**.

**UT9194**  
**UT9194W**  
**UT9194B**

**RAIN SHIELD WALL HOUSING 4 MODULES ULTRA**

Rain shield for wall housing, 4 modules, for Ultra entrance panel. Made of grey-coloured anodised aluminium. Dimensions (L x H x D): 116 x 385 x 57 mm.

Also available in versions: **White RAL9010 (UT9194W)** and **Black RAL9005 (UT9194B)**.

**UT9194H**

**RAIN SHIELD FLUSH-MOUNTED 2X2 MODULES ULTRA**

Rain shield for wall housing, 4 modules (2 supports of 2 side-by-side modules), for Ultra entrance panel. Made of grey-coloured anodised aluminium. Dimensions (L x H x D): 227 x 203 x 57 mm.

**UT9196**

**RAIN SHIELD WALL HOUSING 6 MODULES ULTRA**

Rain shield for wall housing, 6 modules (2 supports of 3 side-by-side modules), for Ultra entrance panel. Made of grey-coloured anodised aluminium. Dimensions (L x H x D): 227 x 293 x 57 mm.

**UT9198**

**RAIN SHIELD WALL HOUSING 8 MODULES ULTRA**

Rain shield for wall housing, 8 modules (2 supports of 4 side-by-side modules), for Ultra entrance panel. Made of grey-coloured anodised aluminium. Dimensions (L x H x D): 227 x 385 x 57 mm.

**UT9199**

**RAIN SHIELD WALL HOUSING 9 MODULES ULTRA**

Rain shield for wall housing, 9 modules (3 supports of 3 side-by-side modules), for Ultra entrance panel. Made of grey-coloured anodised aluminium. Dimensions (L x H x D): 338 x 293 x 57 mm.



**3639/0** **STAND FOR SURFACE-MOUNTED ENTRANCE PANELS, HEIGHT 170 CM**  
Stand for surface-mounted Ultra, Powercom, Ikall and Ikall Metal entrance panels. Dimensions (L x H x D): 18 x 170 x 7.5 cm.

**3639/1** **STAND FOR 1-MODULE ENTRANCE PANELS, HEIGHT 170 CM**  
Stand for 1-module Ultra, Powercom, Ikall and Ikall Metal entrance panels, dimensions (LxHxD): 18 x 170 x 7.5 cm

**3639/2** **STAND FOR 2-MODULE ENTRANCE PANELS, HEIGHT 170 CM**  
Stand for 2-module Ultra, Powercom, Ikall and Ikall Metal entrance panels, dimensions (LxHxD): 18 x 170 x 7.5 cm

**3639/3** **STAND FOR 3-MODULE ENTRANCE PANELS, HEIGHT 170 CM**  
Stand for 3-module Ultra, Powercom, Ikall and Ikall Metal entrance panels, dimensions (LxHxD): 18 x 170 x 7.5 cm

**3639/4** **STAND FOR 4-MODULE ENTRANCE PANELS, HEIGHT 170 CM**  
Stand for surface-mounted Ultra, Powercom, Ikall and Ikall Metal entrance panels. Dimensions (L x H x D): 18 x 170 x 7.5 cm

**3640/0** **STAND FOR SURFACE-MOUNTED ENTRANCE PANELS, HEIGHT 117 CM**  
Stand for surface-mounted Ultra, Powercom, Ikall and Ikall Metal entrance panels. Dimensions (L x H x D): 18 x 117 x 7.5 cm.

**3640/1** **STAND FOR 1-MODULE ENTRANCE PANELS, HEIGHT 117 CM**  
Stand for surface-mounted Ultra, Powercom, Ikall and Ikall Metal entrance panels. Dimensions (L x H x D): 18 x 117 x 7.5 cm.

**3640/2** **STAND FOR 2-MODULE ENTRANCE PANELS, HEIGHT 117 CM**  
Stand for surface-mounted Ultra, Powercom, Ikall and Ikall Metal entrance panels. Dimensions (L x H x D): 18 x 117 x 7.5 cm.

**3640/3** **STAND FOR 3-MODULE ENTRANCE PANELS, HEIGHT 117 CM**  
Stand for surface-mounted Ultra, Powercom, Ikall and Ikall Metal entrance panels. Dimensions (L x H x D): 18 x 117 x 7.5 cm.

**3640/4** **STAND FOR 4-MODULE ENTRANCE PANELS, HEIGHT 117 CM**  
Stand for surface-mounted Ultra, Powercom, Ikall and Ikall Metal entrance panels. Dimensions (L x H x D): 18 x 117 x 7.5 cm.



**UT9141** **ULTRA ADAPTER PLATE FOR 1-MODULE BOXES**  
Plate used to install Ultra series surface-mounted external units in 1-module flush-mounted boxes made by leading competitors. Made of grey-coloured anodised aluminium. Dimensions (L x H x D): 140 x 139 x 3 mm.

**UT9142** **ULTRA ADAPTER PLATE FOR 2-MODULE BOXES**  
Plate used to install Ultra series surface-mounted external units in 2-module flush-mounted boxes made by leading competitors. Made of grey-coloured anodised aluminium. Dimensions (L x H x D): 140 x 229 x 3 mm.

**UT9143** **ULTRA ADAPTER PLATE FOR 3-MODULE BOXES**  
Plate used to install Ultra series surface-mounted external units in 3-module flush-mounted boxes made by leading competitors. Made of grey-coloured anodised aluminium. Dimensions (L x H x D): 140 x 320 x 3 mm.

**UT9144** **ULTRA ADAPTER PLATE FOR 4-MODULE BOXES**  
Plate used to install Ultra series surface-mounted external units in 4-module flush-mounted boxes made by leading competitors. Made of grey-coloured anodised aluminium. Dimensions (L x H x D): 140 x 410 x 3 mm.





# ACCESSORIES



**UT9110**

### NAMEPLATE LABEL SHEETS FOR ULTRA ENTRANCE PANEL

The kit contains 5 sheets of adhesive labels for nameplates and 1 sheet for the info module.



**UT9331**

### THIRD-PARTY PLATE ADAPTER. 1 ULTRA MODULE

Adapter for mounting 1 Ultra module, flush-mounted, on third-party plates from the rear. The thickness of the plate can vary between 1.5 and 3 mm. The adapter is ready to be installed on 2.5 mm thick plates. Dimensions (L x H x D): 138 x 150 x 37 mm.



**UT9332**

### THIRD-PARTY PLATE ADAPTER. 2 ULTRA MODULES

Adapter for mounting 2 Ultra modules, flush-mounted, on third-party plates from the rear. The thickness of the plate can vary between 1.5 and 3 mm. The adapter is ready to be installed on 2.5 mm thick plates. Dimensions (L x H x D): 138 x 240.7 x 37 mm.



**UT9333**

### THIRD-PARTY PLATE ADAPTER. 3 ULTRA MODULES

Adapter for mounting 3 Ultra modules, flush-mounted, on third-party plates from the rear. The thickness of the plate can vary between 1.5 and 3 mm. The adapter is ready to be installed on 2.5 mm thick plates. Dimensions (L x H x D): 138 x 331.4 x 37 mm.



**UT3063U**


### 8-BUTTON INTERFACE SIMPLEBUS 1-2/VIP FOR SINGLE PLATE

Interface for the management of 8 buttons, for use with single-plate outdoor entrance panels. Compatible with all systems. Works in conjunction with audio or audio/video modules for the Ultra series entrance panel. Complete with 475 mm long cable with connectors for connection to the audio or audio/video module, or other button interfaces. Cable connection via spring-loaded terminal block. Dimensions (L x H x D): 74 x 42 x 18 mm.

**UT9331P**

### PLASTERBOARD FIXING KIT. 1 ULTRA MODULE

Kit for installing the 1-module Ultra entrance panel on plasterboard walls.



**UT9332P**

### PLASTERBOARD FIXING KIT. 2 ULTRA MODULES

Kit for installing the 2-module Ultra entrance panel on plasterboard walls.

**UT9333P**

### PLASTERBOARD FIXING KIT. 3 ULTRA MODULES

Kit for installing the 3-module Ultra entrance panel on plasterboard walls.

**UT9334P**

### PLASTERBOARD FIXING KIT. 4 ULTRA MODULES

Kit for installing the 4-module Ultra entrance panel on plasterboard walls.



**UT9333G**

### ULTRA INSTALLATION KIT FOR GLASS, 3 MODULES

Kit for installing the 3-module Ultra entrance panel on glass walls.




## MYCOMELIT APP

# Designed to meet your needs.

**Simple, straightforward and customised.**


Thanks to all the services it provides, MyComelit makes work easier for all **industry professionals**: Installers, System integrators, Building managers, Designers, Security managers, Sales assistants and Architects.

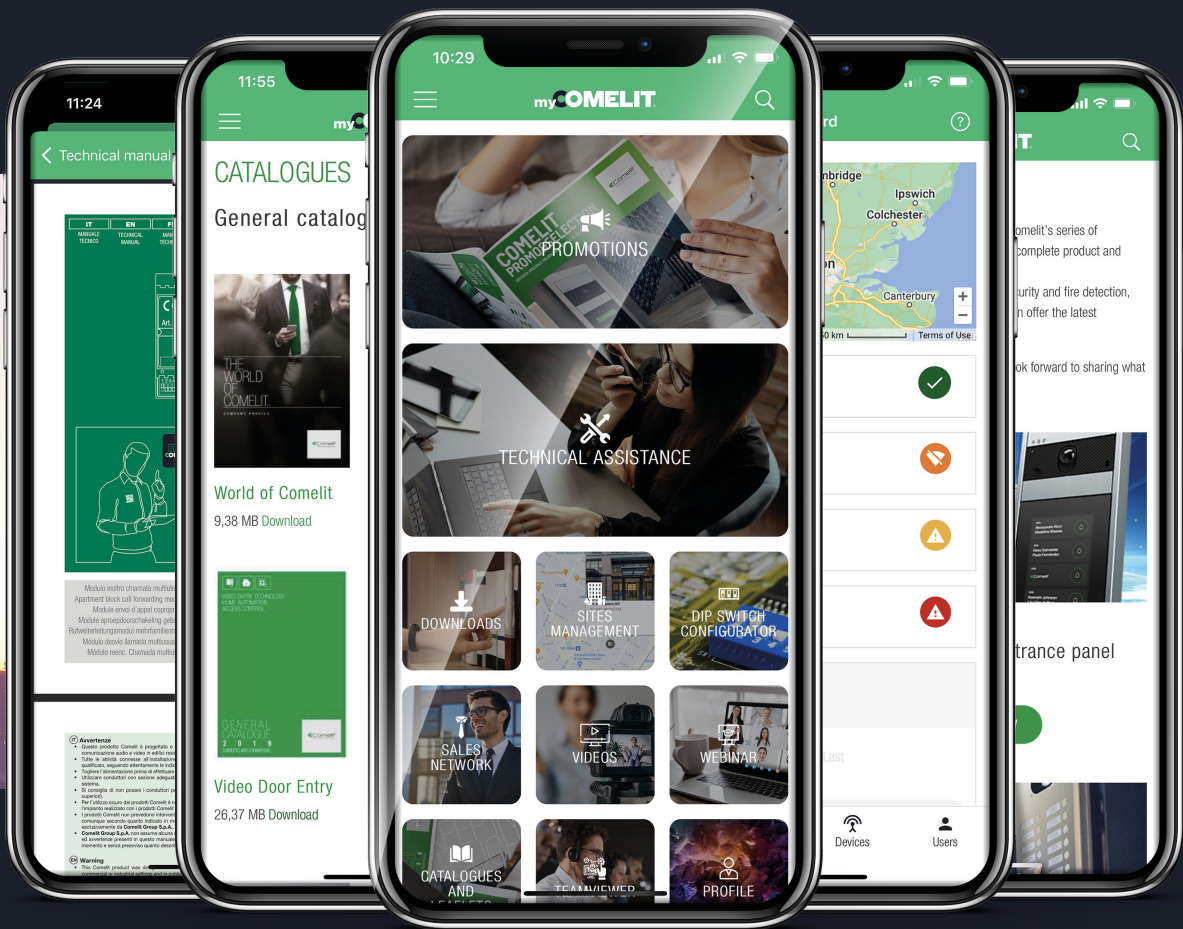

# myCOMELIT®

## THE APP YOU WON'T BE ABLE TO DO WITHOUT!

What are you waiting for?



**JOIN THE MYCOMELIT WORLD NOW!**

COMELIT®



cod. 265200148

8 0239 03 4339 75

I marchi e le denominazioni commerciali che compaiono in questa pubblicazione appartengono ai relativi proprietari.  
Le dimensioni dei prodotti derivanti dalle immagini sono puramente indicative.

