


CAT 6 RISER CABLE


23/4 CMR/FT4 REEL IN BOX




SPEC SHEET




0E-CAT6RBL




0E-CAT6RBK



0E-CAT6RWH



0E-CAT6RYW



0E-CAT6RGN

Physical Characteristics

Conductor: 23 AWG Solid Bare Annealed Copper

Insulation: HDPE (High Density Polyethylene)

Conductor Color Code:

- Pair 1: Blue - White/Blue
- Pair 2: Orange - White/Orange
- Pair 3: Green - White/Green
- Pair 4: Brown - White/Brown

Spline: FR Polyolefin

Rip Cord: Applied longitudinally under jacket

Jacket: PVC (Flame-Retardant, SUN RES & RoHS Compliant)

Jacket Legend:

- 0000FT CAT 6 4 PR 23 AWG E507576 (UL) CMR c(UL)us FT4 SUN RES 75C (RoHS)
- UL VERIFIED TO TIA-568C.2 CAT 6 ##### RM# A B C D E F 1 2 3 4 5 6 7 8 9

Nominal Cable Diameter (in.): 0.232

Nominal Cable Net Weight (lbs./1000ft.): 27.60


Minimum Bend Radius (in.): 1.0

Maximum Pulling Force (lbs.): 25

Temperature Rating (°F):

- Installation: +32 to +140
- Storage & Operation: -4 to +167

Operating Voltage: 300V

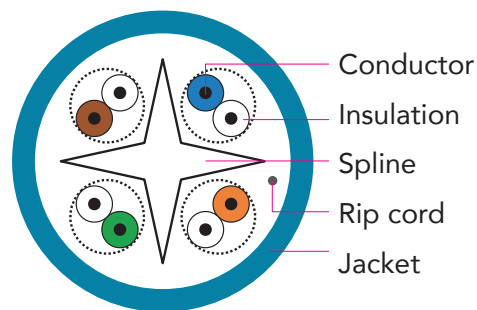

Applications

IEEE802.3: 1000BASE-T, 100 BASE-TX,

10 BASE-T, ANSI/TIA/EIA 854:

1000BASE-TX, 155Mp/s, 1.2 Gb/s ATM,

ANSI x3.263: 100Mb/s, IEEE 802.3af

DTE Power (PoE),

Digital Video



**For more information contact
your ADI Sales person or visit
adiglobal.com/adiexclusivebrands**

CAT6 RISER CABLE

23/4 CMR/FT4 REEL IN BOX



Standard Compliance

- ANSI/TIA-568-C.2
- ANSI/TIA-862 (Building Automation)
- IEC 11801 Ed.2.0 (Class E)
- ICEA S-102-700 (Category 6)
- NEC/CEC Type CMR (UL 1666) for Riser
- UL 444
- RoHS Compliant Directive 2011/65/EU

Certifications



Certifications for Management System

ISO 9001: 2008, ISO 14001: 2004, OHSAS 18001

Electrical Characteristics

Max. Capacitance	Max. DC Resistance	Dielectric Strength	Characteristic Impedance
(nF/100m @ 1 kHz)	(Ω /100m @ 68°F)	(DC-kV, 2s)	(Ω 1~100 MHz)
5.6	9.38	2.5	100 $\pm$ 15

Frequency	Insertion Loss	NEXT	PSNEXT	ACRF	PSACRF	Return Loss	PD	PD Skew
MHz	Max. db/100m	Min. db/100m	Min. db/100m	Min. db/100m	Min. db/100m	Min. db/100m	Max. ns/100m	Max. ns/100m
1	2.0	74.3	72.3	67.8	64.8	20.0	570	45
4	3.8	65.3	63.3	55.8	52.8	23.0	552	45
10	6.0	59.3	57.3	47.8	44.8	25.0	545	45
16	7.6	56.2	54.2	43.7	40.7	25.0	543	45
20	8.5	54.8	52.8	41.8	38.8	25.0	542	45
31.25	10.7	51.9	49.9	37.9	34.9	23.6	540	45
62.5	15.4	47.4	45.4	31.9	28.9	21.5	539	45
100	19.8	44.3	42.3	27.8	24.8	20.1	538	45
250	32.8	38.3	36.3	19.8	16.8	18.0	537	45
350	39.8	36.1	34.1	16.9	13.9	16.3	536	45

* Spec meets ANSI/TIA/eIA 568 C.2 standard. Frequencies beyond the TIA requirements are for information only. All values are db/ 100 m (328ft)



**For more information contact
your ADI Sales person or visit
adiglobal.com/adiexclusivebrands**