



# HDMI EXTENDER WITH USB 2.0

OE-EXT4KKVM

SUPPORTS RESOLUTIONS UP TO 1080P@60 AND HDCP 1.4 COMPATIBILITY.  
EXTENDS SIGNALS UP TO 80M/260FT, AND SUPPORTS KVM CONTROL AND  
BI-DIRECTIONAL POE

## SPECIFICATIONS:

### Technical

- Input/Output Port:  
Transmitter: 1 x HDMI IN, 1 x UTP OUT, 1 x USB (PC),  
1 x DC 12V IN  
Receiver: 1 x UTP IN, 1 x HDMI OUT, 2 x USB DEVICE,  
1 x DC 12V IN
- Resolution Supported:  
1080P@60/50/30/25Hz; 720P@60/50Hz; 480P@60Hz
- Maximum Data Rate: 6.75Gbps
- Maximum Pixel Clock: 225MHz
- Audio Format: PCM 2.0
- Transmission Distance:  
Up to 80m/262ft via Cat 5e/6 or better cable
- Warranty: 2 years

For more information please call 1-833-574-9124  
or email [AVARRO@adiglobal.com](mailto:AVARRO@adiglobal.com)

To learn more about AVARRO products visit  
[avarro.adiglobaldistribution.us](http://avarro.adiglobaldistribution.us)


- PART#: OE-EXT4KKVM

- UPC: 840049305809


### General

- Operating Temperature: 0°C to 45°C (32°F to 113°F)
- Storage Temperature: -20°C to 70°C (-4°F to 158°F)
- Humidity: 10% to 90%, non-condensing
- ESD Protection:  
±8kV (Air-gap discharge)/  
±4kV (Contact discharge)
- Surge Protection: Voltage: ±1 kV
- Power Supply: DC 12V 2A
- Power Consumption (max): ≤6.3 W (Pair)
- Device Dimension (Transmitter / Receiver):  
9.82 cm x 2.3 cm x 7.5 cm / 3.87" x 0.91" x 2.95"
- Product Weight (Transmitter/Receiver): 0.22kg/0.48lb

Transmitter

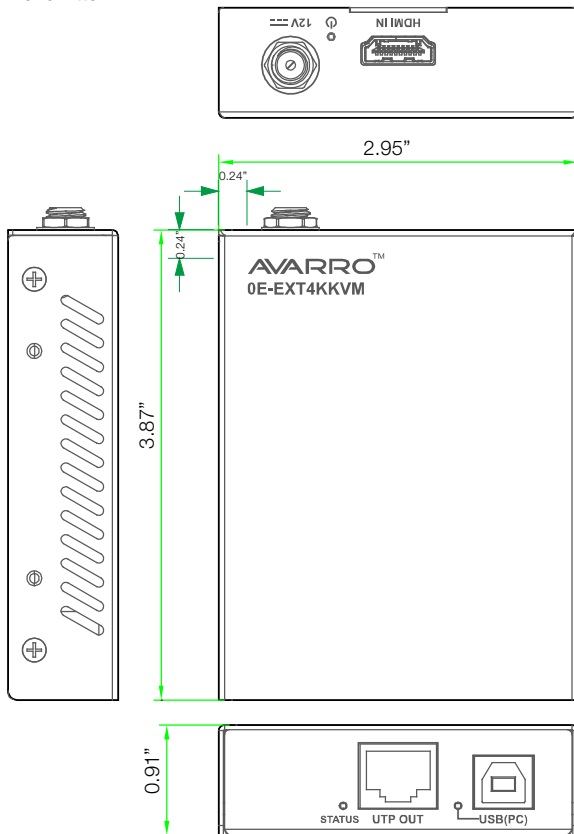

Receiver

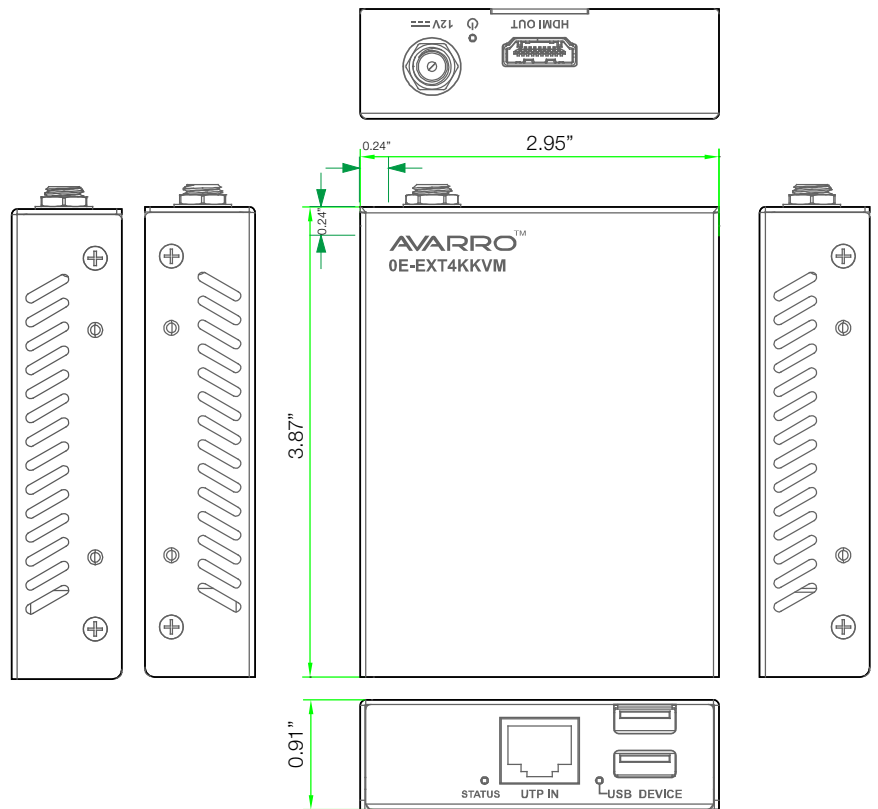

For more information please call 1-833-574-9124  
or email [AVARRO@adiglobal.com](mailto:AVARRO@adiglobal.com)

To learn more about AVARRO products visit  
[avarro.adiglobaldistribution.us](http://avarro.adiglobaldistribution.us)