

AVARRO™

AUDIO CONVERTER DIGITAL TO ANALOG 0E-HDMICONVA



SUPPORTS CONVERTING DIGITAL AUDIO UP TO PCM 5.1 FROM COAXIAL AND TOSLINK PORTS TO ANALOG AUDIO OUTPUTS OUTPUT FORM L/R RCA PORT AND 3.5MM HEADPHONE

SPECIFICATIONS:

Technical

- Input Sampling Rate:
32, 44.1, 48 and 96KHz
- Audio Format:
Input: PCM 2.0/5.1 up to 24 bit
Output: PCM 2.0
- Warranty: 2 years


For more information please call 1-833-574-9124
or email AVARRO@adiglobal.com

To learn more about AVARRO products visit
avarro.adiglobaldistribution.us

- PART#: 0E-HDMICONVA
- UPC: 840049305755

General

- Operating Temperature:
0°C to 45°C (32°F to 113°F)
- Storage Temperature:
-20°C to 70°C (-4°F to 158°F)
- Humidity: 10% to 90%, non-condensing
- ESD Protection:
±8kV (Air-gap discharge)/
±4kV (Contact discharge)
- Surge Protection: Voltage: ±1 kV
- Power Supply: DC 5V 1A
- Power Consumption (Max): 0.73W
- Device Dimension:
6.0cm x 2.02cm x 6.0cm/0.20" x 0.07" x
0.20"
- Product Weight: 0.08kg/0.18lb

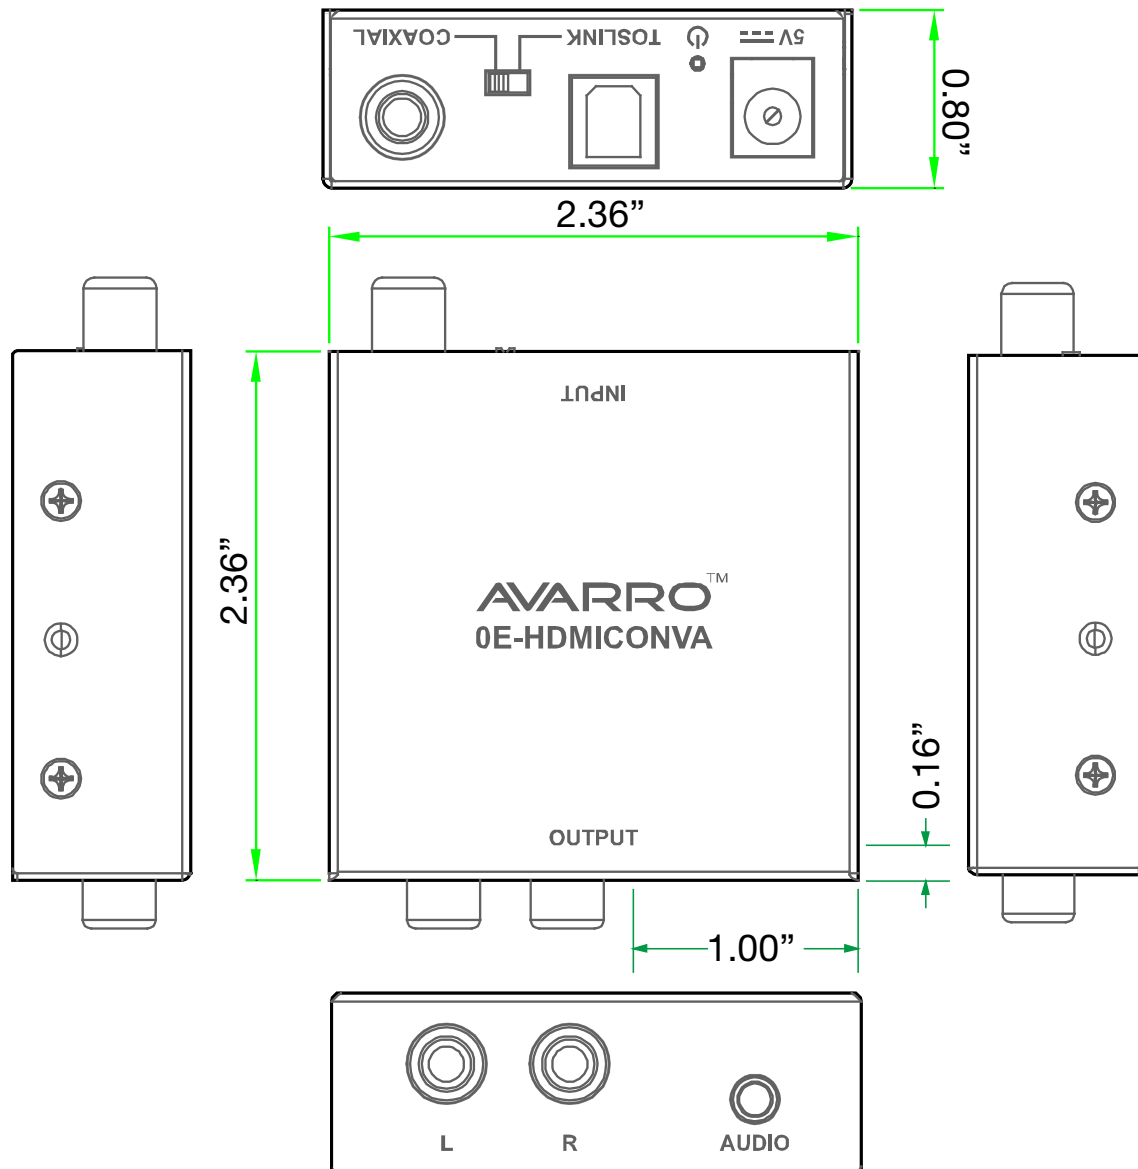

For more information please call 1-833-574-9124
or email AVARRO@adiglobal.com

To learn more about AVARRO products visit
avarro.adiglobaldistribution.us