



HDMI EXTENDER OVER SINGLE UTP

0E-HDMIEXT4K



0E-HDMIEXT4K HAS CAPABILITIES TO TRANSMIT 4K@60HZ (CHROMA SUB-SAMPLING 4:2:0 8-BIT ONLY) UHD VIDEO, HD AUDIO AND BI-DIRECTIONAL IR CONTROL.

SPECIFICATIONS:

Technical

- Input/Output:
Transmitter: 1 x HDMI IN, 1 x IR IN, 1 x IR OUT, 1 x RJ45 Port
Receiver: 1 x HDMI OUT, 1 x IR IN, 1 x IR OUT, 1 x RJ45 Port
- Resolution Supported:
3840 x 2160@30/25/24Hz, 1920 x 1080@60/50/30/25/24Hz,
1280 x 720@60/50/30/25/24Hz, 720 x 576@50Hz,
720 x 480@60Hz
- Input/Output Signal Type: HDMI1.4
- Maximum Data Rate: 10.2Gbps
- Maximum Pixel Clock: 340MHz
- Maximum Transmission Distance: 70m/230ft
- Warranty: 2 years


- PART#: 0E-HDMIEXT4K
- UPC: 811914027591

General

- Operating Temperature: 0°C to 45°C (32°F to 113°F)
- Storage Temperature: -20°C to 70°C (-4°F to 158°F)
- Humidity: 10% to 90%, non-condensing
- ESD Protection:
±8kV (Air-gap discharge)/
±4kV (Contact discharge)
- Surge Protection: Voltage: ±1 kV
- Power Supply: DC 18V 1A (for each unit)
- Power Consumption (max): 8.8W
- Device Dimension (Transmitter / Receiver):
11.5cm x 2.1cm x 6.45cm/4.53" x 0.83" x 2.54"
- Product Weight (Transmitter/Receiver): 0.22kg/0.48lb

For more information please call 1-833-574-9124
or email AVARRO@adiglobal.com

To learn more about AVARRO products visit
avarro.adiglobaldistribution.us

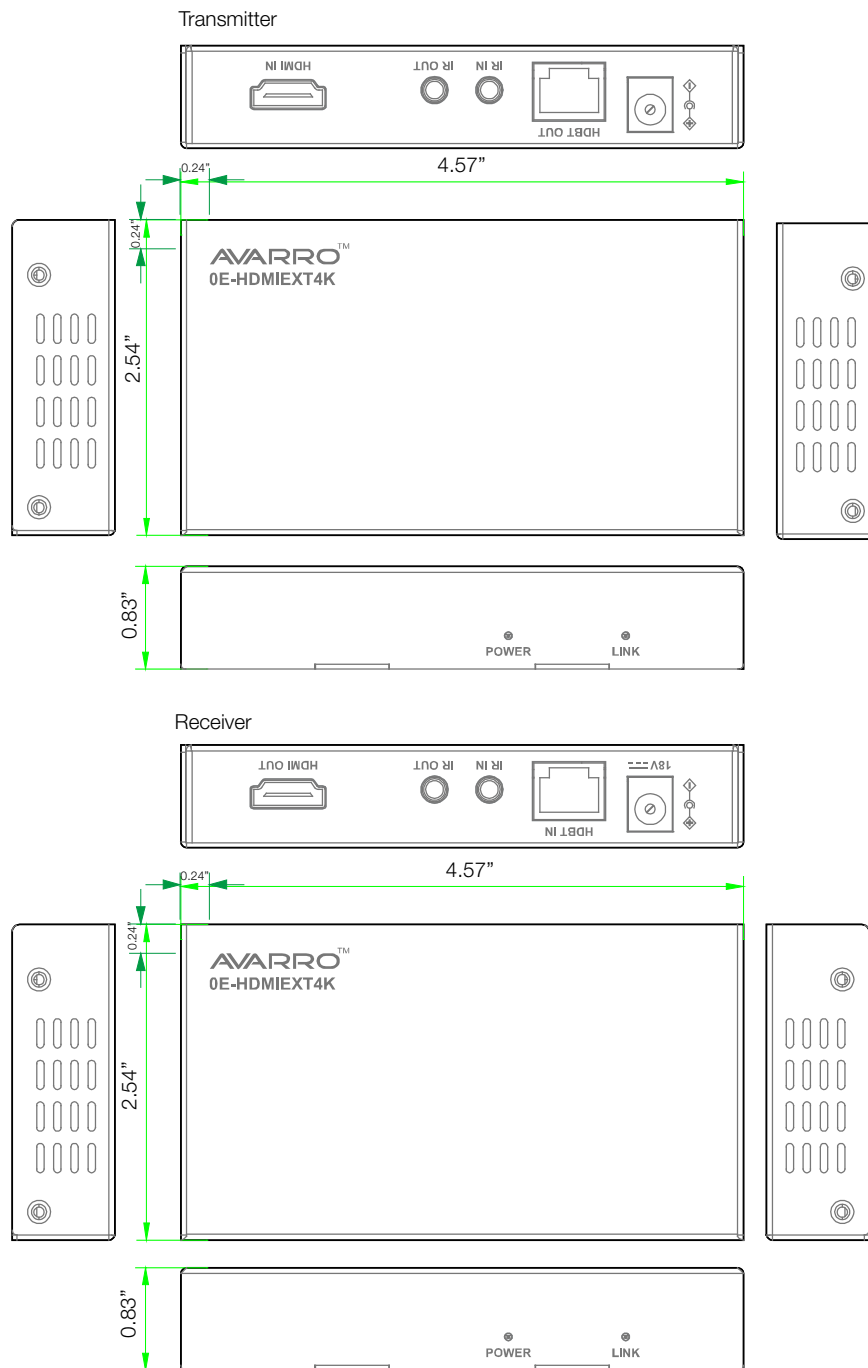

For more information please call 1-833-574-9124
or email AVARRO@adiglobal.com

To learn more about AVARRO products visit
avarro.adiglobaldistribution.us