

# RCI Electronic Access Controls Product Catalogue



# Table of Contents

<b>Electromagnetic Locks</b>	8310 MultiMag®	7
	8320 MultiMag®	7
	8310-IQ IntelliMag®	8
	8320-IQ IntelliMag®	8
	DE8310 Delayed Egress	9
	171HD Magnetic Lock	10
	8360 Mortise MiniMag®	11
	8365 Mortise MicroMag®	11
	8371 Surface MiniMag®	12
	8372 Surface MiniMag®	12
	8375 Surface MicroMag®	13
	8380 GateMag®	13
	Accessories	14-16
	Building Code Signs	17
<b>Electric Strikes</b>	Cross Reference	19
	0161 3/4" Semi-Mortise Rim Strikes	20
	0162 3/4" Surface Mount Rim Strikes	21
	0163 1/2" Surface Mount Rim Strikes	22
	F1114 Centerline Strikes	23
	F1119 Centerline Strikes	23
	F2164/2364 All-In-One Strikes	24
	4 Series Centerline Strikes	25
	6 Series Centerline Strikes	26
	7 Series Centerline Strikes	27
	12C Compact Strike	28
	VR165 Vertical Rod Strike	28
	VR166 Vertical Rod Strike	29
	Modular Strike Inserts	30
	Modular Strike Faceplates	31
	Accessories	32-34
	Frame & Lock Type Reference Guide	34
<b>Keypads &amp; Readers</b>	5355R Proximity Reader & Keypad Combo	36
	5395R Proximity Reader	36
	6005R Mullion Proximity Reader	36
	125kHz Proximity Cards & Fobs	37
	9325 Keypads	38
	9212 Keypads	39
	9321 Reader + Controller	40
	9322 Reader + Controller	41
	9323 Reader + Controller	41

<b>Switches</b>	906 Handicap Pushbutton	43
	908 Exit Pushbutton	43
	916 Tamper-Resistant Handicap Pushbutton	44
	918 Tamper-Resistant Exit Pushbutton	44
	990 Oversized Tamper-Resistant Pushbutton	45
	991 Pneumatic Time Delay Pushbutton	46
	919 Rotary Release Pushbutton	47
	920 Emergency Release Keyswitch/Pushbutton	47
	917 Easy Touch Pushbutton	48
	972 All-In-One Illuminated Pushbutton	48
	970 Illuminated Exit Pushbutton	49
	975 Illuminated Exit Pushbutton	49
	980 Economy Pushbutton	50
	903 Audible Alert	50
	960 Tamper-Resistant Keyswitch	51
	904P Emergency Pull Station	52
	913 Microwave Motion switch	52
	909 Rocker Switch	52
	914 Sounder	52
	915 Passive Infrared	53
	915AFI Active Focused Infrared	53
	946 Square Push Plate	54
	950 Round Push Plate	54
	946T Short range Touchless Activator	55
	950T Short range Touchless Activator	55
	IL06 Barrier-Free Controller	56
	910TC Touchless Switch	57
	912 Series Battery Powered Touch-Free Actuators	58
	940 Rectangular Push Plate	59
	941 Mullion Push Plate	60
	9LP36 Low Profile Push Plate	61
	9RCT433 Transmitters	61
	9DRCR433 Receivers	61
	9500/9501 Mortise Pin Transfers	62
	9507/9509 Flex Loops	62
	9520 Series Electrified Hinges	62
	9512/9513 Bridge Cables	63
	9530 Balanced Magnetic Contact DPS	63
	9540 Recessed Magnetic Contact DPS	63
	Accessories	64

<b>Locksets</b>	C800 Series Cylindrical Locksets	66-68
<b>Specialty Locks</b>	YG80 Electronic Heavy-Duty Lock	70
	3590 Lock 'N' Prox	71
	3510LM Electromechanical Cabinet Lock	72
	3513 Electromechanical Cabinet Lock	72
	3525 Electromechanical Rack Handle Lock	73
	MEM4400 Compact Electromechanical Lock	74
	S2500A Mini Electromagnetic Lock	74
	EM-MAG1500 Compact Electromechanical Lock	75
	MEM2400 Compact Electromechanical Lock	75
<b>Exit Devices</b>	120 Series Exit Bar	77
	1200 Series Mechanical Rim Exit Bar	78
	1300 Series Electrified Rim Exit Bar	79
	Exterior Trims	80
<b>Power Supplies</b>	DKPS-2A Power Supply	82
	DKPS-4A Power Supply	82
	DKPS-6A Power Supply	83
	DKPS-TSW Tamper Switches	83
	WPDT - Wireless Power Data Transfer	84
	Accessories	85-86
<b>Door Controller and Peripherals</b>	Keyscan LUNA SDACSKT	87
	K-SMART3	87
	K-SECURE Credentials 10-pack	87
	K-SECURE Credential (single)	87
	K-SF-1K Fob	88
	SDRA Antenna	88
	PS1225 Plug In Transformer	88
<b>Terms &amp; Conditions</b>		89





## KEYSCAN LUNA™

A giant leap  
for small business  
access control.

**Keyscan LUNA™ is a cost-effective access control system specifically designed for installations of 1 to 6 doors.**

The combination of Single Door Access Control units (SDAC) and comprehensive software, together with low computer overhead, helps make access control affordable for small businesses. Security, accountability, user management and reporting is now available at a fraction of the cost of comparable systems.



Some call it  
access control.  
We call it **Trust.**

E-Plex® 7900  
shown with Keyscan  
Mobile Access  
Credential

Trust dormakaba for solutions that provide the perfect blend of form, flexibility and function. Our comprehensive line of networked access systems, electronic access controls, wireless and stand-alone electronic locks are designed for all commercial building applications with a single goal in mind— making access in life smart and secure.

**Keyscan networked  
access control**





**RCI electronic  
access controls**



**E-Plex, Simplex and  
Powerplex stand-alone  
and wireless access controls**



# Electromagnetic Locks

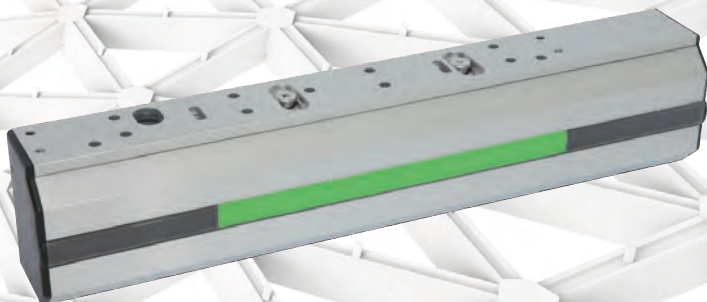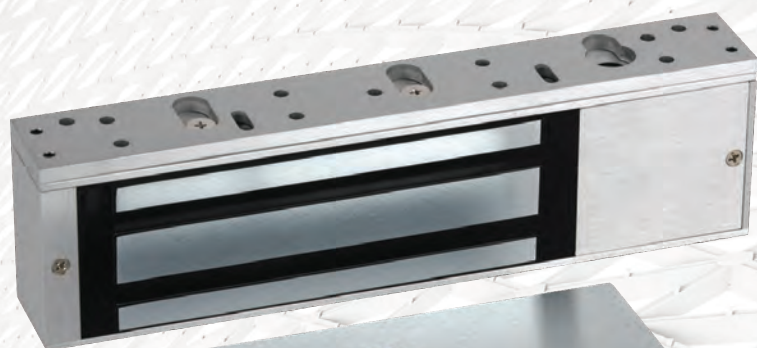



# RCI Electromagnetic Locks



## 8310 MultiMag®

For single outswinging interior or perimeter doors.  
10-1/2"W x 2-7/8"H x 1-5/8"D (268mm x 73mm x 41mm) –  
Includes 1/4" (6mm) mounting bracket  
Armature Plate: 7-7/16"W x 2-3/8"H x 5/8"D  
(190mm x 61mm x 16mm)



## 8320 MultiMag®

For double outswinging interior or perimeter doors.  
21-1/8"W x 2-7/8"H x 1-5/8"D (536mm x 73mm x 41mm) –  
Includes 1/4" (6mm) mounting bracket  
Armature Plate: 7-7/16"W x 2-3/8"H x 5/8"D  
(190mm x 61mm x 16mm) each



Energy  
230mA<sup>1</sup>  
Auto-Sensing 12-24VDC



Strength  
Up to 1,200lbf Holding Force  
(each electromagnet)



Warranty  
Lifetime Limited Warranty



Mode  
Fail-Safe



Fire-Rated  
CAN/ULC S104  
UL 10C 1-1/2-Hours



Monitoring  
Optional Door Status Sensor (DSS)/  
Security Condition Sensor (SCS) Available

<sup>1</sup>Max at 12VDC for 8310, 460mA for 8320

- Keyhole mounting for ease of installation
- Built-in time delay (instant release with adjustable relock, programmable from 0-35 seconds)
- Convenient plug-in wiring terminals
- Easy-access wiring cavity
- Stabilizing 4-bolt "drop stop" mounting
- Surge protection
- Designed to overcome residual magnetism
- Self-drilling Tek® fasteners
- Includes 5/8" (16mm) armature plate, optional 3/8" (9.5mm) available
- Available in Brushed Anodized Aluminum (28) or Brushed Anodized Dark Bronze (40) finish
- UL 294 Special Locking Arrangement Component (6th Edition)
- CAN/ULC S104 Auxiliary Locks Listed for fire doors rated up to 1-1/2-hours
- UL 10C Auxiliary Locks Listed for fire doors rated up to 1-1/2-hours
- California State Fire Marshal Listed (CSFM: 3774-2275:0500)



### Options

#### SCS – Security Condition Sensor

Electronic field presence sensor for remote and local LED indication of lock status (locked or unlocked), reduced holding force caused by materials between magnet and plate and unlocked device due to voltage drop.




LED Indicator

#### DSS – Door Status Sensor

Magnet-reed type sensor for remote indication of door status (opened or closed) independent of local power. Magnet embedded in armature for tamper resistance; reed switch inside electronic housing cavity for easy access.

Armature Plate: 9-7/8"W x 2-3/8"H x 5/8"D  
(252mm x 61mm x 16mm)



Magnetic Door Contact

### How To Order

#### MultiMag®

Single-Magnet	10
Double-Magnet	20
	83

#### Finish

28	–Brushed Anodized Aluminum <sup>2</sup>
40	–Brushed Anodized Dark Bronze

x

SCS	–Security Condition Sensor
DSS	–Door Status Sensor
DSS/SCS	–Door Status Sensor and Security Condition Sensor

#### Options

Example: **8310 SCS x 28**

<sup>2</sup>Standard

# RCI Electromagnetic Locks









## 8310-IQ IntelliMag®

For single outswinging interior or perimeter doors.  
10-1/2"W x 2-7/8"H x 1-5/8"D (268mm x 73mm x 41mm) –  
Includes 1/4" (6mm) mounting bracket  
Armature Plate: 7-7/16"W x 2-3/8"H x 5/8"D  
(190mm x 61mm x 16mm)



## 8320-IQ IntelliMag®

For double outswinging interior or perimeter doors.  
21-1/8"W x 2-7/8"H x 1-5/8"D (536mm x 73mm x 41mm) –  
Includes 1/4" (6mm) mounting bracket  
Armature Plate: 7-7/16"W x 2-3/8"H x 5/8"D  
(190mm x 61mm x 16mm) each

 Energy 590mA <sup>1</sup> Field-Selectable 12/24VDC	 Strength Up to 1,200lbf Holding Force (Each Electromagnet)	 Warranty Lifetime Limited Warranty
 Mode Fail-Safe	 Fire-Rated CAN/ULC S104 UL 10C 1-Hour	 Monitoring Individually Encoded Armature Plate

<sup>1</sup>Max at 12VDC for 8310-IQ, 1.18A for 8320-IQ

- Designed for high security applications, this intelligent magnet recognizes its own armature plate, preventing anyone from “tricking” the magnet with a separate plate – each encoded armature plate is individually registered to match its own electromagnetic lock
- Two independent relay outputs allow for lock status and alarm status for local and/or remote indication
- Illegal armature plate alarm
- Alarm time setting
- Keyhole mounting for ease of installation
- Easy-access wiring cavity

- Stabilizing 4-bolt “drop stop” mounting
- Surge protection
- Built-in time delay (instant release with adjustable relock, programmable from 0-90 seconds)
- Includes 5/8" (16mm) armature plate
- Available in Brushed Anodized Aluminum (28) or Brushed Anodized Dark Bronze (40) finish
- CAN/ULC S104 Auxiliary Locks Listed for fire doors rated up to 1-hour
- UL 10C Auxiliary Locks Listed for fire doors rated up to 1-hour
- California State Fire Marshal Listed (CSFM: 3774-2275:0500)




### How To Order

IntelliMag®					Finish
10	-Single Magnet				
20	-Double Magnet				
83		-IQ	x		
				28	-Brushed Anodized Aluminum <sup>2</sup>
				40	-Brushed Anodized Dark Bronze

Example: **8320-IQ x 40**  
<sup>2</sup>Standard

# RCI Electromagnetic Locks

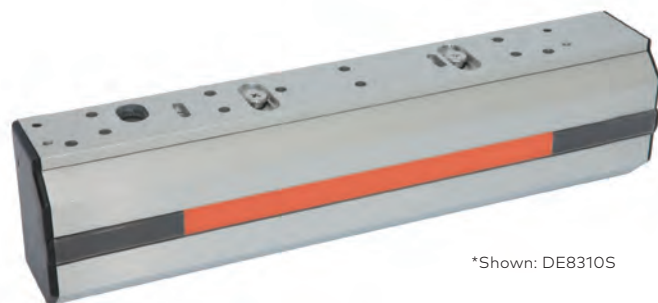

\*Shown: DE8310S

**PUSH UNTIL  
ALARM SOUNDS  
DOOR CAN BE  
OPENED IN  
15 SECONDS**



## DE8310 Delayed Egress

For single outswinging perimeter door.

DE8310: 10-13/16"W x 2-7/8"H x 2-1/8"D (275mm x 73mm x 54mm) – Includes 1/4" (6mm) mounting bracket

DE8310S: 11-3/4"W x 2-7/8"H x 2-1/8"D (299mm x 73mm x 54mm) – Includes 1/4" (6mm) mounting bracket

Armature Plate: 7-7/16"W x 2-3/8"H x 5/8"D (190mm x 61mm x 16mm)



Energy  
490mA<sup>1</sup>  
Auto-Sensing 12-24VDC



Strength  
Up to 1,200lbf Holding Force



Warranty  
5 Year Limited Warranty



Mode  
Fail-Safe



Fire-Rated  
CAN/ULC S104  
UL 10C 1-1/2-Hour



Monitoring  
Local & Remote Relay Outputs & Optional  
Built-In Sounder

<sup>1</sup>Base unit, max at 12VDC

- Built-in sensor detects when pressure is applied to outward swinging doors – no need to replace existing door hardware
- Field-selectable 15 or 30 second release delay with field-selectable 0 to 3 second nuisance delay
- Provision for IBC, SBC, NFPA101, UBC, BOCA or NBC of Canada compliance
- Unique highly visible red/green light panel indicates status of door (local)
- Available with built-in sounder
- Includes 960 Keyswitch for reset and override, Building Code Sign and base unit (DE8310) includes a 914 External Sounder
- Dry contact SPDT relays provided for local and/or remote monitoring
- Keyhole mounting for ease of installation
- Convenient plug-in wiring harnesses
- Easy-access wiring cavity
- Stabilizing 4-bolt "drop stop" mounting
- Surge protection
- Designed to overcome residual magnetism
- Includes self-drilling Tek® fasteners
- DE8310 top jamb bracket kit (TJDE108) now available
- Includes 5/8" (16mm) armature plate
- Brushed Anodized Aluminum (28) finish
- Ability to synchronize up to 4 doors (with or without mullion) using a converter. Please request further details<sup>2</sup>
- UL 294 Special Locking Arrangements Component (6<sup>th</sup> Edition)

- CAN/ULC S533 Special Locking Arrangements Components (4<sup>th</sup> Edition)
- CAN/ULC S104 Auxiliary Locks Listed for fire doors rated up to 1-1/2-hour
- UL 10C Auxiliary Locks Listed for fire doors rated up to 1-1/2-hour
- Patent #'s: US 8,292,337 Canada 2,632,243

### Options

#### S - Built-In Sounder

Built-in sounder pulses slowly during the short nuisance delay and sounds steady through the release delay and will continue until reset. If forced open before the set release delay has lapsed, the sounder cannot be turned off without switching the system power off.



Built-in Sounder

### How To Order

DE8310  x  28  
S – Built-In Sounder


#### Options

Example: **DE8310 S x 28**



<sup>2</sup>Custom applications that require synchronization of 3 or 4 doors will require special AHJ approval



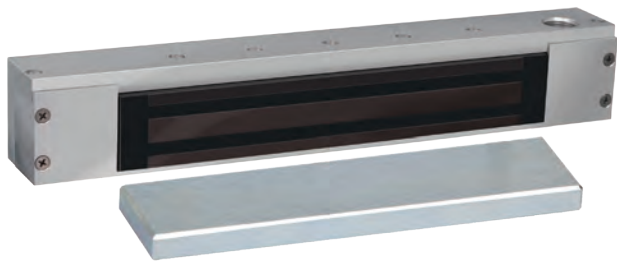


# RCI Electromagnetic Locks



## 171HD Magnetic Lock for Hazardous Locations

14"W x 1-3/4"H x 2"D (355mm x 45mm x 51mm)

Armature Plate: 10-3/4"W x 1-3/4"H x 5-8"D (273mm x 45mm x 16mm)

	Energy 260 mA <sup>1</sup> 24VDC		Strength Up to 1,200lbf Holding Force
	Warranty 1 Year Limited Warranty		Mode Fail-Safe
	Monitoring Door Position Status Sensor		

- Magnetic lock that meets the requirements for Class I, Division 2 applications.
- Offers continuous monitoring capability for open/close status or attempted unauthorized entry.
- Ability to securely lock fire exit doors and power down when signaled to do so by an appropriate door control unit.
- Low projections from header accommodates most door conditions without the need for filler plate or special bracket.
- Door position switch (DPS) standard feature.
- Built-in surge protection.
- Easy installation and maintenance.
- No pins, latches or moving parts to avoid failure that could impede safe egress in an emergency situation.
- Includes 5/8" (16 mm) armature plate.
- Brushed Anodized Aluminum (28) finish.
- Hazardous Locations Door Holders:
  - Category – FDGF. Class I, Division 2 compliant.
  - Tested to UL228 - Door closers-holders with/without integral smoke detectors
  - File Number – E146590
- Releasing Devices:
  - Category – SZNT
  - Tested to ANSI/UL864 - control units and accessories for fire alarm systems
  - File Number – S5020

### Also available

RCI ZB171HD for single in-swinging doors, pull side mount.

Includes "Z" bracket inswing assembly kit.



# RCI Electromagnetic Locks



## 8360 Mortise MiniMag®

For sliding doors.

9"W x 1-1/2"H x 1-1/6"D (229mm x 38mm x 27mm) –

Includes 3/4" (19mm) mounting tabs

Armature Plate: 7-1/4"W x 1-1/2"H x 1/2"D  
(185mm x 38mm x 13mm)



Energy  
500mA<sup>1</sup>  
Field-Selectable 12/24VDC



Strength  
Up to 750lbf  
Holding Force



Warranty  
Lifetime Limited Warranty



Mode  
Fail-Safe



Monitoring  
Built-In Remote Lock Status  
Sensor

<sup>1</sup>Max at 12VDC

- Low-profile design ideal for sliding doors
- Brushed Anodized Aluminum (28) finish

### How To Order

8360 x 28



## 8365 Mortise MicroMag®

For small enclosures.

7-15/16"W x 1-11/32"H x 13/16"D (202mm x 34mm x 21mm) – In-

cludes 11/16" (17.5mm) mounting tabs

Armature Plate: 5-1/8"W x 1-1/4"H x 21/64"D  
(130mm x 32mm x 8.5mm)



Energy  
400mA<sup>1</sup>  
Field-Selectable  
12/24VDC



Strength  
Up to 300lbf  
Holding Force



Warranty  
Lifetime Limited  
Warranty



Mode  
Fail-Safe

<sup>1</sup>Max at 12VDC

- Low-profile design ideal for sliding doors, cabinets and small enclosures
- Brushed Anodized Aluminum (28) finish

### How To Order

8365 x 28

# RCI Electromagnetic Locks



## 8371 Surface MiniMag®

For single outswinging interior or perimeter doors.  
9-3/8"W x 1-7/8"H x 1"D (238mm x 48mm x 25mm) –  
Includes 3/16" (5mm) mounting bracket  
Armature Plate: 7-1/4"W x 1-1/2"H x 1/2"D  
(185mm x 38mm x 13mm)

## 8372 Surface MiniMag®

For double outswinging interior or perimeter doors without mullions.  
18-3/4"W x 1-7/8"H x 1"D (476mm x 48mm x 25mm) –  
Includes 3/16" (5mm) mounting bracket  
Armature Plate: 7-1/4"W x 1-1/2"H x 1/2"D  
(185mm x 38mm x 13mm) each



Energy  
520mA<sup>1</sup>  
Field-Selectable 12/24VDC



Strength  
Up to 750lbf Holding Force  
(each electromagnet)



Warranty  
Lifetime Limited Warranty



Mode  
Fail-Safe



Fire-Rated  
CAN/ULC S104  
UL 10C 1-Hour



Monitoring  
Optional Door Status Sensor (DSS)/  
Security Condition Sensor (SCS)  
Available

<sup>1</sup>Max at 12VDC for 8371, 1.04A for 8372


- Stabilizing 4 bolt "drop stop" mounting
- Keyhole mounting for ease of installation
- Surge protection
- Designed to overcome residual magnetism
- Easy-access wiring cavity
- Includes 3/8" (9.5mm) armature plate
- Available in Brushed Anodized Aluminum (28) or Brushed Anodized Dark Bronze (40) finish
- UL 294 Special Locking Arrangement Component (6th Edition)
- UL 10C Auxiliary Locks Listed for fire doors rated up to 1-hour
- CAN/ULC S104 Auxiliary Locks Listed for fire doors rated up to 1-hour
- California State Fire Marshal Listed (CSFM: 3774-2275:0500)

### Options



### SCS – Security Condition Sensor


Electronic field presence sensor for remote and local LED indication of lock status (locked or unlocked), reduced holding force caused by materials between magnet and plate and unlocked device due to voltage drop.



LED Indicator

### DSS – Door Status Sensor

Magnet-reed type sensor for remote indication of door status (opened or closed) independent of local power. Magnet embedded in armature for tamper resistance; reed switch inside electronic housing cavity for easy access.



Magnetic Door Contact

### How To Order

MiniMag®		Finish	
Single Magnet	71	28	–Brushed Anodized Aluminum <sup>2</sup>
Double Magnet	72	40	–Brushed Anodized Dark Bronze
83		x	
	SCS		–Security Condition Sensor
	DSS		–Door Status Sensor
	DSS/SCS		–Door Status Sensor And Security Condition Sensor
Options			

Example: **8371 SCS x 28**

<sup>2</sup>Standard







# RCI Electromagnetic Locks



## 8375 Surface MicroMag®

For swinging doors on small enclosures.  
6-17/32"W x 1-1/2"H x 13/16"D (166mm x 38mm x 21mm) –  
Includes 1/8" (3mm) mounting bracket  
Armature Plate: 5-1/8"W x 1-1/4"H x 21/64"D  
(130mm x 32mm x 8.5mm)

	Energy 360mA <sup>1</sup> Field-Selectable 12/24VDC		Strength Up to 300lbf Holding Force
	Warranty Lifetime Limited Warranty		Mode Fail-Safe

<sup>1</sup>Max at 12VDC

- Low-profile compact design
- Easy-access wiring cavity
- Surge protection
- Designed to overcome residual magnetism
- Self-drilling Tek® fasteners
- Includes 21/64" (8.5mm) armature plate
- Brushed Anodized Aluminum (28) finish







### How To Order

8375 x 28



## 8380 GateMag®

For interior or exterior perimeter gates.  
8-7/8"W x 2-1/2"H x 1-3/4"D (225mm x 63mm x 45mm)  
Armature Plate: 7-7/16"W x 2-3/8"H x 5/8"D (190mm x 61mm x 16mm)

	Energy 480mA <sup>1</sup> Field-Selectable 12/24VDC		Strength Up to 1,200lbf Holding Force
	Warranty Lifetime Limited Warranty		Mode Fail-Safe
	Fire-Rated CAN/ULC S104 UL 10C 1-1/2-Hour		Environment Rugged Weather- Resistant Design

<sup>1</sup>Max at 12VDC

- Rugged, stainless steel housing
- Weather-resistant
- Built-in remote lock status (RLS) indicated whether the magnet is locked or unlocked
- Versatile face or bottom through-bolt mounting
- Built-in conduit fitting and extra-long wire cable allowing easy wire access to an electrical box
- Surge protection
- Designed to overcome residual magnetism
- Includes 5/8" (16mm) armature plate, optional 3/8" (9.5mm) available
- Brushed Stainless Steel (32D) finish
- UL 10C Auxiliary Locks Listed for fire doors rated up to 1-1/2-hours
- CAN/ULC S104 Auxiliary Locks Listed for fire doors rated up to 1-1/2-hours
- California State Fire Marshal Listed (CSFM: 3774-2275:0500)



### How To Order

8380 x 32D

# RCI Electromagnetic Locks Accessories



## Angle Brackets

For narrow aluminum frames or center-hung single-acting doors, when inadequate space is left for mounting.

- Available in Brushed Anodized Aluminum (28) or Brushed Anodized Dark Bronze (40). Please specify when ordering.

Model	Dimensions	Finish	Compatible with
AB-01	1"H x 1"W x 10-1/2"L	28/40	8310
AB-02	1-1/2"H x 1"W x 10-1/2"L	28/40	8310
AB-03	1-1/2"H x 1-1/4"W x 10-1/2"L	28/40	8310
AB-20	1"H x 1"W x 21"L	28/40	8320
AB-21	1-1/2"H x 1"W x 21"L	28/40	8320
AB-22	1-1/2"H x 1-1/4"W x 21"L	28/40	8320
AB-710	1"H x 1"W x 9-3/8"L	28/40	8371
AB-711	1-1/2"H x 1"W x 9-3/8"L	28/40	8371
AB-712	1-1/2"H x 1-1/2"W x 9-3/8"L	28/40	8371
AB-713	1-1/2"H x 2"W x 9-3/8"L	28/40	8371
AB-720	1"H x 1"W x 18-3/4"L	28/40	8372
AB-721	1-1/2"H x 1"W x 18-3/4"L	28/40	8372
AB-722	1-1/2"H x 1-1/2"W x 18-3/4"L	28/40	8372
AB-723	1-1/2"H x 2"W x 18-3/4"L	28/40	8372
AB179NR-258	1-1/2"H x 2-5/8"W x 14"L For door with No Reveal - Single - Angle Bracket	28	171HD
AB179R-118-158	1"H x 1"W x 14"L For 1-1/8" to 1-5/8" Reveal - Single - Angle Bracket	28	171HD
AB179R-58-1	1-1/2"H x 2"W x 14"L For 5/8" to 1" Reveal - Single - Angle Bracket	28	171HD




## Armature Bolts

Model	Dimensions	Description
<b>Compatible with: 8310, 8310-IQ, DE8310, EW8310, 8371, 8380</b>		
ARMB155	2-1/8" (55mm)	For doors 1-3/4"-2-1/4" (44-57mm) thick
ARMB170	2-3/4" (70mm)	For doors 2-1/4"-2-3/4" (57-70mm) thick
ARMB180	3-1/8" (80mm)	For doors 2-1/2"-3" (70-76mm) thick
<b>Compatible with: 8320, 8320-IQ, 8372</b>		
ARMB255	2-1/8" (55mm)	For doors 1-3/4"-2-1/4" (44-57mm) thick
ARMB270	2-3/4" (70mm)	For doors 2-1/4"-2-3/4" (57-70mm) thick
ARMB280	3-1/8" (80mm)	For doors 2-1/2"-3" (70-76mm) thick



## Armature Plates

Model	Dimensions	Finish	Compatible with
AP01	3/8" (9.5mm)	Steel	8310, 8320, 8380
AP02	5/8" (16mm)	Steel	8310, 8320, 8380
AP03	3/8" (9.5mm)	Steel	8360, 8371, 8372
AP04	5/16" (8mm)	Steel	8365, 8375
AP20	3/8" (9.5mm)	Steel	8310xDSS, 8320xDSS
AP21	5/8" (16mm)	Steel	8310xDSS, 8320xDSS
AP03D	3/8" (9.5mm)	Steel	8371xDSS, 8372xDSS



## DSS Retrofit Kits

If a door status sensor is desired after magnet has been installed, it can easily be added on site.

- Kit includes both Brushed Anodized Aluminum (28) and Brushed Anodized Dark Bronze (40) cover plate screws.

Model	Description	Finish	Compatible with
DSR01	3/8" (9.5mm)	Steel	8310
DSR02	5/8" (16mm) Standard	Steel	8310
DSR03	3/8" (9.5mm)	Steel	8320
DSR04	5/8" (16mm) Standard	Steel	8320



## Armature Plate Holders

- Available in Brushed Anodized Aluminum (28) or Brushed Anodized Dark Bronze (40). Please specify when ordering.

Model	Description	Finish	Compatible with
AH10	8310 armature plate holder	28/40	8310
AH15	8310xDSS armature plate holder	28/40	8310xDSS
AH20	8320 armature plate holder	28/40	8320
AH25	8320xDSS armature plate holder	28/40	8320xDSS
AH71	8371 armature plate holder	28/40	8371
AH72	8372 armature plate holder	28/40	8372
AH75	8375 armature plate holder	28/40	8375

**NOTE:** Accessories may impact holding force.

# RCI Electromagnetic Locks Accessories



## Conduit Mounting Bracket

Used anywhere surface-mounted conduit is required to run wires to the face of the magnetic lock.

Model	Dimensions	Finish	Compatible with
CMB108	1"D x 2-11/64"H x 10-9/16"L	28	8310



## Filler Bars/Filler Plates

For frame stops narrower than 2" (51mm).

- Available in Brushed Anodized Aluminum (28) or Brushed Anodized Dark Bronze (40). Please specify when ordering.

Model	Dimensions	Finish	Compatible with
FB-01	1/4"H x 3/4"W x 10-1/2"L	28/40	8310
FB-02	3/8"H x 3/4"W x 10-1/2"L	28/40	8310
FB-03	1/2"H x 3/4"W x 10-1/2"L	28/40	8310
FB-04	5/8"H x 3/4"W x 10-1/2"L	28/40	8310
FB-05	1/2"H x 5/8"W x 10-1/2"L	28/40	8310
FB-20	1/4"H x 3/4"W x 21"L	28/40	8320
FB-21	3/8"H x 3/4"W x 21"L	28/40	8320
FB-22	1/2"H x 3/4"W x 21"L	28/40	8320
FB-23	5/8"H x 3/4"W x 21"L	28/40	8320
FB-24	1/2"H x 5/8"W x 21"L	28/40	8320
FB-710	1/4"H x 3/4"W x 9-3/8"L	28/40	8371
FB-711	3/8"H x 3/4"W x 9-3/8"L	28/40	8371
FB-712	1/2"H x 3/4"W x 9-3/8"L	28/40	8371
FB-713	5/8"H x 3/4"W x 9-3/8"L	28/40	8371
FB-720	1/4"H x 3/4"W x 18-3/4"L	28/40	8372
FB-721	3/8"H x 3/4"W x 18-3/4"L	28/40	8372
FB-722	1/2"H x 3/4"W x 18-3/4"L	28/40	8372
FB-723	5/8"H x 3/4"W x 18-3/4"L	28/40	8372
FP178-12	1/2"H x 1-1/4"W x 14"L Single Filler Plate	28	171HD
FP178-58	5/8"H x 1-1/4"W x 14"L Single Filler Plate	28	171HD



## Post Bracket

Used to mount armature plate to sliding gate.

Model	Dimensions	Finish	Compatible with
PB-80	3-1/2"H x 2-1/2"W x 8-7/8"L	28	8380



## Glass Door Brackets

Required for glass doors without mounting rails.

Model	Dimensions	Finish	Compatible with
GB8112	1/2" (13mm)	32D	8310
GB8134	3/4" (19mm)	32D	8310
GB8212	1/2" (13mm)	32D	8320
GB8234	3/4" (19mm)	32D	8320
GB7112	1/2" (13mm)	32D	8371
GB7134	3/4" (19mm)	32D	8371
GB7212	1/2" (13mm)	32D	8372
GB7234	3/4" (19mm)	32D	8372
GB7512	1/2" (13mm)	32D	8375
GB7534	3/4" (19mm)	32D	8375



## L Brackets

Required when there is no space on the header to mount the magnetic lock.

Magnet mounts on bracket and bracket mounts on vertical face of frame.

- Available in Brushed Anodized Aluminum (28) or Brushed Anodized Dark Bronze (40). Please specify when ordering.

Model	Dimensions	Finish	Compatible with
LB-10	2-1/2"H x 2"W x 10-1/2"L	28/40	8310
LB-20	2-1/2"H x 2"W x 21"L	28/40	8320

# RCI Electromagnetic Locks Accessories




## Spacers

For aluminum blade stop frames. Used to lower the magnet to align with armature plate.

- Available in Brushed Anodized Aluminum (28) or Brushed Anodized Dark Bronze (40). Please specify when ordering.

Model	Dimensions	Finish	Compatible with
SP-01	1/4"H x 1-1/2"W x 10-1/2"L	28/40	8310
SP-02	3/8"H x 1-1/2"W x 10-1/2"L	28/40	8310
SP-03	1/2"H x 1-1/2"W x 10-1/2"L	28/40	8310
SP-04	5/8"H x 1-1/2"W x 10-1/2"L	28/40	8310
SP-20	1/4"H x 1-1/2"W x 21"L	28/40	8320
SP-21	3/8"H x 1-1/2"W x 21"L	28/40	8320
SP-22	1/2"H x 1-1/2"W x 21"L	28/40	8320
SP-23	5/8"H x 1-1/2"W x 21"L	28/40	8320
SP-710	1/4"H x 1"W x 9-3/8"L	28/40	8371
SP-711	3/8"H x 1"W x 9-3/8"L	28/40	8371
SP-712	1/2"H x 1"W x 9-3/8"L	28/40	8371
SP-713	5/8"H x 1"W x 9-3/8"L	28/40	8371
SP-720	1/4"H x 1"W x 18-3/4"L	28/40	8372
SP-721	3/8"H x 1"W x 18-3/4"L	28/40	8372
SP-722	1/2"H x 1"W x 18-3/4"L	28/40	8372
SP-723	5/8"H x 1"W x 18-3/4"L	28/40	8372
SP-75	1/4"H x 13/16"W x 6-9/16"L	28/40	8375

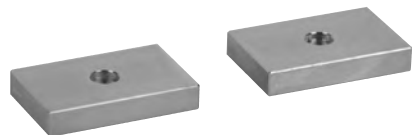

## Split Armature Plates

Allow use of single magnet lock with pair of doors.

Model	Dimensions	Finish	Compatible with
SA138	3/8" (9.5mm)	Steel	8310
SA158	5/8" (16mm)	Steel	8310
SA75	5/16" (8mm)	Steel	8375



## Top Jamb "Z" Bracket

Allows for horizontal adjustment of armature plate. Mounted on pull side of the door.

- Available in Brushed Anodized Aluminum (28) or Brushed Anodized Dark Bronze (40). Please specify when ordering.

Model	Description	Finish	Compatible with
TJ10	8310 Z bracket kit	28/40	8310
TJ20	8320 Z bracket kit	28/40	8320
TJ71	8371 Z bracket kit	28/40	8371
TJ72	8372 Z bracket kit	28/40	8372
TJ75	8375 Z bracket kit	28/40	8375
TJ80	8380 Z bracket kit	28/40	8380
TJDE108	DE8310 bracket kit For inswing applications.	28	DE8310



## Hardware Packs

Model	Description	Compatible with
HK8310	Includes: Allen wrench, metal sleeve, armature bolt, sexnut, bolt, steel washers, rubber washers, flat head screws, pan head screws, plugs, TEK screws.	8310, 8320 (Buy 2 to make one 8320 Hardware kit)
HK8371	Includes: Allen wrench, metal sleeve, armature bolt, sexnut, bolt, steel washers, rubber washers, flat head screws, pan head screws, plugs, TEK screws.	8371
HK8375	Includes Allen wrench, armature bolt, steel washers, rubber washers, TEK screws, round head screws, button head sexnut.	8375

# RCI Electromagnetic Locks Building Code Signs

**PUSH UNTIL  
ALARM SOUNDS  
DOOR CAN BE  
OPENED IN  
15 SECONDS**

## BC1 Series Building Code Signs

11"W x 10"H (28cm x 25cm)

- Available in English, French and Spanish. Please specify when ordering.

Model	Description
BC1P	15 Seconds, printed on clear Plexiglass
BC1M	15 Seconds, printed on clear Mylar
BC1MW	15 Seconds, printed on white Mylar
BC1T	15 Seconds, red vinyl transfer letters
BC1M-30	30 Seconds, printed on clear Mylar

**EMERGENCY EXIT  
UNLOCKED  
BY FIRE ALARM**

## BC2 Series Building Code Signs

13"W x 4"H (33cm x 10cm)

- Available in English, French and Spanish. Please specify when ordering.

Model	Description
BC2P	Printed on clear Plexiglass
BC2M	Printed on clear Mylar
BC2MW	Printed on white Mylar
BC2T	Red vinyl transfer letters

**PULL UNTIL  
ALARM SOUNDS  
DOOR CAN BE  
OPENED IN  
15 SECONDS**

## BCDE Series Building Code Signs

11"W x 10"H (28cm x 25cm)

- Available in English, French and Spanish. Please specify when ordering.

Model	Description
BCDEP	15 Seconds, printed on clear Plexiglass
BCDEM	15 Seconds, printed on clear Mylar
BCDEMWB	15 Seconds, printed on white Mylar
BCDET	15 Seconds, red vinyl transfer letters
BCDEM-30	30 Seconds, printed on clear Mylar

**KEEP  
PUSHING  
DOOR UNLOCKS  
IN  
15 SECONDS**

## BC3 Series Building Code Signs

14"W x 12"H (36cm x 30.5cm)

- Available in English, French and Spanish. Please specify when ordering.

Model	Description
BC3P	Printed on clear Plexiglass
BC3M	Printed on clear Mylar
BC3MW	Printed on white Mylar
BC3T	Red vinyl transfer letters

Electric Strikes

Keycards &amp; Readers

Switches

Locksets

Specialty Locks

Exit Devices

Power Supplies



# Electric Strikes



# RCI Electric Strikes

## Strike Cross Reference

RCI		HES	Allegion/Von Duprin	Folger Adam	Adams Rite	Trine
<b>0 Series</b> Rim Strikes	<b>0161</b>	-	6112	310-4	-	EN800
	<b>0162</b>	9600	-	-	-	4800
	<b>F0162</b>	9500	6300	-	-	4800F
	<b>0163</b>	9400	-	-	-	4850
<b>F1 Series</b> Fire-Rated Centerline Strikes	<b>F1114</b>	7501	6211	712, 732, 712-75, 732-75	-	EN400
	<b>F1119</b>	-	6215	310-2	-	EN950
<b>2 Series</b> All-In-One Strikes	<b>F2164/2364</b>	1006 1006CLB	6400	742-75	-	4100
<b>4 Series</b> Centerline Strikes	<b>4104/4304</b>	5200-501A	5100	-	-	2012RD/RS
	<b>4105/4305</b>	-	-	-	-	-
	<b>4107/4307</b>	5200-503	-	-	-	-
	<b>4108/4308</b>	5200-502	-	-	-	-
	<b>4114/4314</b>	5200-501	4211	-	7170	-
	<b>4119/4319</b>	-	6200	-	-	-
	<b>F4104</b>	4500	-	-	-	-
	<b>F4114</b>	4500	-	-	7270	-
<b>6 Series</b> Centerline Strikes	<b>S/L6504</b>	5000-501A 5200-501A	5100	-	7101, 7160 7300, 7440	-
	<b>S/L6505</b>	-	-	-	-	-
	<b>S/L6507</b>	5000-503 5200-503	-	-	7130, 7430	-
	<b>S/L6508</b>	5000-502 5200-502	5100	-	7110, 7310 7410	-
	<b>S/L6514</b>	5200-501 5000-501	5100, 4200	-	-	2012
	<b>S/L65U</b>	-	5100	-	-	-
<b>7 Series</b> Centerline Strikes	<b>7104/7304</b>	5000-501A 5200-501A	5100	-	7100	2012RD
	<b>7105/7305</b>	-	-	-	-	-
	<b>7107/7307</b>	5000-503	-	-	-	2678
	<b>7107/7108</b>	5200-503	5100	-	7110	-
	<b>7114/7314</b>	5200-501	5100	-	7140	2012
	<b>7119/7319</b>	-	6200	-	-	-
<b>Compact Strikes</b>	<b>12C</b>	-	-	-	-	323478LC


# RCI Electric Strikes

O Series

## 0161 3/4" Semi-Mortise Rim Strikes

Semi-mortise rim strike designed for use with Pullman latch rim exit devices.


1-3/4"W x 9"H x 1-5/8"D (45mm x 229mm x 41mm)




Energy  
200mA<sup>1</sup>  
12VAC/VDC Or  
24VAC/VDC



Strength  
1,500lbf Static  
70ft-lb Dynamic



Warranty  
3 Year Limited Warranty



Mode  
Fail-Secure



Endurance  
500,000 Cycles

<sup>1</sup>Max at 12VDC

- Semi-mortise rim strike designed for use with Pullman latch rim exit devices
- Accommodates 1/2" to 3/4" (13mm–19mm) latch projection
- Ensures proper latch alignment with horizontal adjustment
- Stainless steel ensures superior strength and creates a sleek aesthetic design
- Lockdown holes for secure mount
- Non-handed
- Brushed Stainless Steel (32D) finish
- UL 1034 burglary-resistant Listed



### How To Order

0161	-		x	32D
		05	-12VAC/VDC	
		08	-24VAC/VDC	
Voltage				

Example: 0161 - 05 x 32D

### Accessories

Model	Description
0161DDH	Double door housing, SPC <sup>2</sup> finish

**NOTE:** UL 1034 Burglary-resistant listing does not apply with use of 0161DDH.

<sup>2</sup>SPC=Silver Powder Coat





# RCI Electric Strikes



## 0 Series

## 0162 3/4" Rim Strikes

Completely surface-mounted rim strike designed for use with Pullman latch rim exit devices.

1-3/4"W x 9"H x 3/4"D (45mm x 229mm x 20mm)



Energy  
500mA<sup>1</sup>  
Field-Selectable  
12/24VDC & 12-24VAC



Strength  
1,500lbf Static  
70ft-lb Dynamic



Warranty  
5 Year Limited Warranty



Mode  
Fail-Secure



Endurance  
500,000 Cycles  
(standard)



Fire-Rated  
Optional 3-Hour  
Model Available<sup>2</sup>



Latch Monitor  
Optional Latch Monitor  
Model Available

<sup>1</sup>Max at 12VDC

<sup>2</sup>Fire-rated (F) model only



Conventional Keeper  
(One Moving Part)



Lockdown Holes  
For Secure Mount



Latch Monitor  
(0162LM Model)

### How To Order

#### Options

F	-Fire-Rated
0162	x 32D
LM	-Latch Monitor

#### Options

Example: **F0162LM x 32D**

### Accessories

Model	Description
0162DDH	Double door housing, SPC <sup>3</sup> finish
0162MSK	1/16" (1.5mm) mounting spacers

**NOTE:** UL 1034 Burglary-resistant listing and fire-rating do not apply with use of 0162DDH. <sup>3</sup>SPC=Silver Powder Coat

- Completely surface-mounted – no frame cutting required
- Accommodates 1/2" to 3/4" (13mm–19mm) latch projection
- Stainless steel ensures superior strength and creates a sleek aesthetic design
- Horizontal adjustment ensure proper latch positioning to compensate for door misalignment – up to 1/4" (6.4mm)
- Conventional keeper design (one moving part)- promotes even load distribution
- Plug-in wire connectors
- Lockdown holes for secure mount
- HEX socket head cap screws for added support
- Installation tool included (HEX key)
- Non-handed (featuring horizontal solenoid design)
- 1/16" (1.5mm) mounting spacers for additional latch engagement included
- Brushed Stainless Steel (32D) finish
- Factory tested to over 4-million cycles of operation
- Certified to ANSI/BHMA standard A156.31, Grade 1, endurance 500,000 cycles (R01629 & RF01629)
- UL 294 Listed for Access Control Unit Accessory (6th Edition)
- UL 1034 burglary-resistant Listed
- UL 10C, 3-hour fire-rating Listed<sup>2</sup>
- CAN/ULC S104, 3-hour fire-rating Listed<sup>2</sup>
- California State Fire Marshal Listed (CSFM: 3776-2275:0501)<sup>2</sup>
- Patent #: US 7,722,097
- Patent #: Canadian 2,597,916



### Options

- LM – Latch monitor
- F – 3-hour fire-rating Listed

# RCI Electric Strikes







## 0 Series

## 0163 1/2" Rim Strikes

Slim, adjustable design ideal for tight-fitting installations.

Designed for use with Pullman latch rim exit devices.

1-3/4"W x 9"H x 1/2"D (45mm x 229mm x 13mm)

	Energy 270mA <sup>1</sup> 11-16VAC 12VAC/VDC Or 24VAC/VDC		Strength 1,500lbf Static 70ft-lb Dynamic
	Warranty 5 Year Limited Warranty		Mode Fail-Secure
	Endurance 500,000 Cycles		Latch Monitor Optional Latch Monitor Model Available

<sup>1</sup>Max at 12VDC

- Designed to fit in tight situations where the exit device is mounted very close to the door frame, e.g. aluminum storefront applications.
- For maximum latch engagement, the strike keeper has been designed to pivot out of the strike body versus rolling out of the strike.
- Accommodates 1/2" to 3/4" (13 mm–19 mm) latch projection.
- Horizontal adjustment ensures proper latch positioning to compensate for door misalignment – up to 1/4" (6.4 mm).
- Solenoid technology.
- Shim may be added to the strike cavity to engage with misaligned deadlatch.
- Lockdown holes for secure mount.
- Cooler operation – runs cool to the touch; no suppressor kit needed.
- High-grade stainless steel ensures superior strength and creates a sleek aesthetic.
- 1/16" (1.5mm) mounting spacer included
- Non-handed.
- Plug-in wire connectors.
- Certified to ANSI/BHMA standard A156.31, Grade 1, endurance 500,000 cycles (0163 & 0163LM)
- UL294 Listed for Access Control Unit Accessory (6th Edition).
- UL1034 burglary-resistant Listed.
- Patents pending.



### How To Order

0163  x  32D  
LM – Latch Monitor  
Example: **0163LM x 32D**

### Options

- LM – Latch monitor

### Accessories

Model	Description
0162DDH	Double door housing, SPC <sup>2</sup> finish

**NOTE:** UL 1034 Burglary-resistant listing does not apply with use of 0162DDH.

<sup>2</sup>SPC=Silver Powder Coat



# RCI Electric Strikes



## F1 Series F1114 Centerline Strikes

Features stainless steel faceplate with square corners ideal for hollow metal frames.  
Faceplate: 1-1/4"W x 4-7/8"H (32mm x 124mm)  
Insert Depth: 1-3/4" (45mm)



## F1 Series F1119 Centerline Strikes

Features stainless steel faceplate with square corners ideal for aluminum and wood frames.  
Faceplate: 1-3/8"W x 9"H (34mm x 229mm)  
Insert Depth: 1-3/4"D (45mm)



Energy  
200mA<sup>1</sup>  
11-16VAC,  
12VAC/VDC  
Or 24VAC/VDC



Strength  
1,500lbf Static  
70ft-lb Dynamic



Warranty  
5 Year Limited Warranty



Mode  
Fail-Secure



Fire-Rated  
CAN/ULC S104  
UL 10C 1-1/2-Hour



Endurance  
500,000 Cycles

<sup>1</sup>Max at 12VDC

- Stainless steel faceplate with square corners
- Accommodates 1/2" (12.7mm), 5/8" (16mm) or 3/4" (19mm) latch projection
- Up to 1/4" (6.4mm) horizontal adjustment, relieves side-load pressure, ensuring proper latch alignment
- Saddle-mount housing design for enhanced strength and durability
- Tamper-resistant pry-guard concealed inside the frame
- Energy efficient coil design
- Mounting tabs, shims and fasteners included
- Non-handed
- Brushed Stainless Steel (32D) finish
- UL 1034 burglary-resistant Listed
- UL 10C, 1-1/2 hour fire-rating Listed
- CAN/ULC S104, 1-1/2 hour fire-rating Listed
- Certified to ANSI/BHMA standard A156.31, Grade 1, endurance 500,000 cycles



### How To Order

#### Faceplate

Faceplate

14	-1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI Square Corner
19	-1-3/8"W x 9"H (34mm x 229mm), Square Corner

F1	1	-	x	32D
		01	-11-16VAC	
		05	-12VAC/ VDC	
		08	-24VAC/ VDC	

#### Voltage

Example: **F1119-01 x 32D**

# RCI Electric Strikes

## 2 Series

## F2164/2364

## All-In-One Strikes

Versatile design features adjustable deadbolt keeper and deadlatch ramp allowing it to work with most locks.

Faceplate: 1-1/4"W x 4-7/8"H (32mm x 124mm)

Insert Depth: 1-3/4"D (45mm)

	Energy 375mA <sup>1</sup> Field-Selectable 12/24VDC, 12-24VAC <sup>2</sup>		Strength 1,500lbf Static 70ft-lb Dynamic
	Warranty 5 Year Limited Warranty		Mode Fail-Secure & Fail-Safe
	Endurance 500,000 Cycles		Latch Monitor Plug-In Latch Monitor Accessory Available
	Fire-Rated Optional 3-Hour Model Available <sup>3</sup>		

<sup>1</sup>Max at 12VDC

<sup>2</sup>12-24VAC not available with 2364 model

<sup>3</sup>Fire-rated (F) model only, 3-hour for single swing, 90-minutes for standard pair of doors

- Versatile strike designed to work with most locks
- Accommodates 1/2" (12.7mm) to 3/4" (19mm) latch projection
- Adjustable deadbolt keeper and deadlatch ramp
- Accommodates up to 1" deadbolt (night-latch function only, bolt will not release)
- Plug-in wire connectors
- Runs cool – solenoid design prevents keeper from heating up
- Trim plate included to cover up irregular frame cut-out
- Stainless steel ensures superior strength and creates a sleek aesthetic
- Includes two keeper shims – 1/16" (1.5mm) and 1/8" (3mm) – for horizontal adjustment for misaligned frames (unique sliding design)
- Non-handed
- Factory tested to over 2-million cycles of operation
- Brushed Stainless Steel (32D) finish
- UL 294 Listed for Access Control Unit Accessory (6th Edition)
- UL 1034 burglary-resistant Listed
- UL 10C, 3-hour fire-rating Listed<sup>3</sup>
- CAN/ULC S104, 3-hour fire-rating Listed<sup>3</sup>
- California State Fire Marshal Listed (CSFM: 3776-2275:0502)<sup>3</sup>
- Certified to ANSI/BHMA standard A156.31, Grade 1, endurance 500,000 cycles
- Patent #: US 9,580,935
- Patent #: Canadian 2,850,072



Saw-Tooth  
Adjustment Locator<sup>1</sup>



Deadbolt Plug

### Accessories

Model	Description
F2LM	Latch monitor plug-in kit (2A @ 24VDC)
2FP	Filler plate (for use when replacing discontinued 2 Series models)
F2-19	Centerline faceplate, 1-3/8"W x 9"H (35mm x 229mm), 32D finish
F2-29	Offset faceplate, 1-3/8"W x 9"H (35mm x 229mm), 32D finish
SMT-01	Strike marking template kit
940-LG	High profile latch guard, 32D finish

### Options

- F – 3-hour fire-rating Listed

### How To Order

Options				
F	–Fire-Rated <sup>4</sup>			
	2	64	x	32D
		1	–Fail-Secure	
		3	–Fail-Safe	
			<b>Mode</b>	

Example: **F2164 x 32D**

<sup>4</sup>Available in fail-secure mode only.







# RCI Electric Strikes



## 4 Series

## Centerline Strikes

Accommodates 3/4" (19mm) latch projection. Various faceplate options available to accommodate most frame types.  
Insert Depth: 1-1/2"D (38mm)

	Energy 200mA <sup>1</sup> (see How to Order chart below)		Strength 1,500lbf Static <sup>2</sup> 70ft-lb Dynamic
	Warranty 3 Year Limited Warranty		Mode Fail-Secure & Fail-Safe
	Endurance 500,000 Cycles <sup>3</sup>		Fire-Rated Optional 1-1/2-Hour Models Available <sup>4</sup>

<sup>1</sup>At 12VDC

<sup>2</sup>1,500lbf Static for fire-rated models, 1,000lbf for non-fire-rated 04 & 14 faceplates, 500lbf for 05, 07, 08 & 19 faceplates.

<sup>3</sup>Fire-rated (F) models only, 250,000 for other models

<sup>4</sup>Fire-rated (F) models only available in fail-secure mode with 04 & 14 faceplates.

- Accommodates 3/4" (19mm) latch projection
- 1-1/2" (38mm) cut-out depth accommodates most door frame material types
- Use with wide range of door thicknesses, 1-3/8" to 2-3/8" (35mm-60mm)
- Standard mounting tabs and fasteners included
- Non-handed
- Trim plate included to cover up irregular frame cutout
- Brushed Stainless Steel (32D) finish
- UL 1034 burglary-resistant Listed
- UL 10C, 1-1/2-hour fire-rating Listed<sup>4</sup>
- CAN/ULC S104, 1-1/2-hour fire-rating Listed<sup>4</sup>
- Certified to ANSI/BHMA standard A156.31, Grade 1, endurance 500,000 cycles<sup>3</sup> (F4 models only)

## How To Order

Options		Fire-Rated <sup>4</sup>		Fail-Secure		Voltage		Faceplate	
Options	F	Fail-Safe	Mode	1	04	11-16VAC-	01		
						12VAC/VDC-	05		
						24VAC/VDC-	08		
						12VDC-	06		
						24VDC	09		
		4			-		x	32D	
	Fail-Secure	3	05	-1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI Radius Corner					
	Fail-Safe			-1-1/8"W x 5-7/8"H (29mm x 150mm), Radius Corner					
				07	-1-1/4"W x 6-7/8"H (32mm x 175mm), Radius Corner				
				08	-1-7/16"W x 7-15/16"(37mm x 202mm), Radius Corner				
	14			-1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI Square Corners					
	19	-1-3/8"W x 9"H (34mm x 228mm), Square Corners							

Example: **F4104-05 x 32D**



## Options

- F - 1-1/2-hour fire-rating Listed

## Accessories

Model	Description
4/7JIG	Standard profile frame prep jig, aluminum
LEK01	1" lip extension kit for retrofit applications, black finish
LEK02	2" lip extension kit for retrofit applications, black finish
LEK03	3" lip extension kit for retrofit applications, black finish (not available for F4)
SMT-01	Strike marketing template kit, aluminum
TP-47-5PK	Trim plates, 5 pack, black finish
930-LG	Standard profile latch guard, 32D finish

# RCI Electric Strikes

## 6 Series

## Centerline Strikes

Two profiles available to accommodate different latch projections.  
Various faceplate options available to accommodate most frame types.  
Standard Insert Depth: 1-3/16" D (30mm)  
Low Profile Insert Depth: 1-1/16" (27mm)

	Energy 375mA <sup>1</sup> Field-Selectable 12/24VDC, 12-24VAC		Strength 1,500lbf Static <sup>2</sup> 70ft-lb Dynamic
	Warranty 3 Year Limited Warranty		Mode Field-Selectable Fail-Secure & Fail-Safe
	Endurance 500,000 Cycles <sup>2</sup>		Monitoring Optional Latch & Keeper Monitor Models Available

<sup>1</sup>At 12VDC

<sup>2</sup>Grade 1, 04 & 14 faceplates only. Grade 2, 1,000lbf static for 05, 07 & 08 faceplates.

- Standard profile accommodates 3/4" (19mm) and Low-profile accommodates 1/2" (12.7mm) or 5/8" (16mm) latch projections
- 1/4" (6.4mm) horizontal adjustment
- Plug-in wire connectors
- Trim plate included to cover up irregular frame cut-out
- Non-handed
- Brushed Stainless Steel (32D)
- Factory tested to over 1-million cycles of operation
- UL 294 Listed for Access Control Unit Accessory (6th Edition)
- UL 1034 burglary-resistant Listed
- Certified to ANSI/BHMA standard A156.31, Grade 1, endurance 500,000 cycles<sup>2</sup>
- Patent #: US 6,874,830 and 7,144,053
- Patent #: Canadian 2,405,642

SECURITY



### Options

- LMKM – Latch and keeper monitor

### How To Order

Options			
Latch And Keeper Monitor–	LMKM		
	65	x	32D
Standard–	S	04	–1-1/4" W x 4-7/8" H (32mm x 124mm), ANSI Radius Corners
Low Profile–	L	05	–1-1/8" W x 5-7/8" H (29mm x 150mm), Radius Corners
		07	–1-1/4" W x 6-7/8" H (32mm x 175mm), Radius Corners
		08	–1-7/16" W x 7-15/16" (37mm x 202mm), Radius Corners
		14	–1-1/4" W x 4-7/8" H (32mm x 124mm), ANSI Square Corners
		U	–Universal, Includes 3 Faceplates (04, 08 & 14)
Profile		Faceplate	

Example: **L6507LMKM x 32D**




### Accessories

Model	Description
S6JIG	Standard profile frame prep jig, aluminum (for S6504 and S6514)
L6JIG	Low profile frame prep jig, aluminum (for L6504 and L6514)
LEKS601	1" lip extension kit for retrofit applications, black finish (for Standard profile)
LEKS602	2" lip extension kit for retrofit applications, black finish (for Standard profile)
LEKS603	3" lip extension kit for retrofit applications, black finish (for Standard profile)
LEKL601	1" lip extension kit for retrofit applications, black finish (for Low profile)
LEKL602	2" lip extension kit for retrofit applications, black finish (for Low profile)
LEKL603	3" lip extension kit for retrofit applications, black finish (for Low profile)
S/L6504DD	Lip bracket and radius faceplate for aluminum double doors with flat astragal (for S/L6504)
S/L6507DD	Lip bracket and radius faceplate for aluminum double doors with flat astragal (for S/L6507)
SMT-01	Strike marketing template kit, aluminum
TP-S6-5PK	Trim plates, 5 pack, black finish (for Standard profile)
TP-L6-5PK	Trim plates, 5 pack, black finish (for Low profile)
940-LG	High profile latch guard, 32D finish



# RCI Electric Strikes

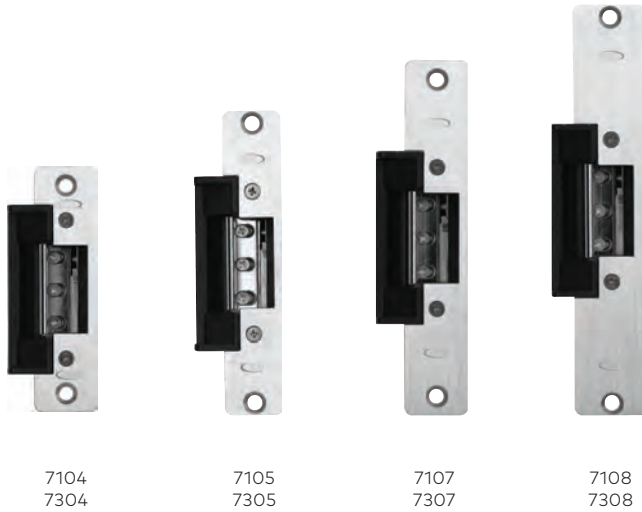7104  
73047105  
73057107  
73077108  
73087114  
73147119  
7319

## How To Order

			Voltage			
	Fail-Secure		11-16VAC-	01	7	x 32D
			12VDC-	05D		
			24VAC-	07		
	Fail-Safe		24VDC-	08D		
			12VDC-	06		
			24VDC-	09		
Mode		Faceplate				
Fail-Secure-	1	04	-1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI radius corners			
Fail-Safe-	3	05	-1-1/8"W x 5-7/8"H (29mm x 150mm), radius corners			
		07	-1-1/4"W x 6-7/8"H (32mm x 175mm), radius corners			
		08	-1-7/16"W x 7-15/16"H (37mm x 202mm), radius corners			
		14	-1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI square corners			
		19	-1-3/8"W x 9"H (34mm x 229mm), square corners			

Example: **7104-05D x 32D**

## 7 Series

# Centerline Strikes

Accommodates 5/8" (16mm) latch projection. Various faceplate options available to accommodate most frame types.  
Insert Depth: 1-1/2" D (38mm)



Energy  
280mA<sup>1</sup>  
(see How to Order  
chart below)



Strength  
500lbf Static  
70ft-lb Dynamic



Warranty  
3 Year Limited  
Warranty



Mode  
Fail-Secure &  
Fail-Safe



Endurance  
250,000 Cycles

<sup>1</sup>At 12VDC

Voltage for fail safe 240mA (73) models: 12VDC (06); 24VDC (09)

- Accommodates 5/8" (16mm) latch projection
- 1/8" (3.2mm) horizontal adjustment
- 1-1/2" (38mm) cut-out depth
- Use with wide range of door thicknesses 1-3/8" to 2-3/8" (35mm-60mm)
- Mounting tabs, fasteners and trim plate included
- Non-handed
- Trim plate included to cover up irregular frame cutout
- Brushed Stainless Steel (32D) finish
- UL 1034 burglary-resistant Listed



## Accessories





Model	Description
4/7JIG	Standard profile frame prep jig, aluminum
LEK01	1" lip extension kit for retrofit applications, black finish
LEK02	2" lip extension kit for retrofit applications, black finish
LEK03	3" lip extension kit for retrofit applications, black finish
SMT-01	Strike marketing template kit, aluminum
TP-47-5PK	Trim plates, 5 pack, black finish
930-LG	Standard profile latch guard, 32D finish

# RCI Electric Strikes



## 12C Compact Strike

A versatile strike suitable for all types of door frames.  
1-13/16"W x 2-3/4"H x 1-1/8"D (46mm x 70mm x 28mm)

	Energy 90mA 12VDC		Strength <sup>1</sup> 1,100lbf Static 44ft-lb Dynamic
	Warranty 1 Year Limited Warranty		Mode Fail-Secure

<sup>1</sup>Internal testing

- Quick and easy to install
- Ideal for wooden, steel & aluminum frames
- Non-handed
- Versatile, compact design
- Replaces standard, non-electrified T-strikes
- Maintains integrity and strength of the door frame
- Brushed Chrome (26D)




### How To Order

12C x 26D



## VR165 Vertical Rod Strike

Accommodates 5/8" (16mm) roller latch. Designed for use with vertical rod exit devices with roller latch.

	Energy 450mA <sup>1</sup> Field-Selectable 12/24VDC & 12-24VAC		Strength 1,500lbf Static 70 Dynamic ft-lb
	Warranty 5 Year Limited Warranty		Mode Fail-Secure
	Endurance 250,000 Cycles		

<sup>1</sup>Max at 12VDC

- Accommodates 5/8" (16mm) roller latch
- Heavy-duty, surface mounted strike
- High grade stainless steel ensures superior keeper strength
- Ensure proper latch alignment – up to 1/4" (6.4mm) adjustment to compensate for door and frame misalignments
- Door stop adjustment for different rail thicknesses
- Horizontal solenoid prevents manipulation from vibration
- Conventional keeper design (one moving part) - promotes even load distribution
- Lockdown tabs for secure mount
- Non-handed
- HEX socket head cap screws for added support and tamper-resistance
- Plug-in wire connector
- Installation tool included (HEX key)
- Brushed Stainless Steel (32D) finish
- UL 1034 burglary-resistant Listed
- UL 294 Listed for access Control Unit Accessory (6th Edition)
- Patent #: US 7,722,097
- Patent #: Canadian 2,597,916

### How To Order

VR165 x 32D

Example: **VR165 x 32D**









# RCI Electric Strikes



## VR166 Vertical Rod Strike

Surface mounted vertical rod strike for Pullman latch.

Simple locking solution for surface vertical rod exit devices having a Pullman style latch.

	Energy 210mA Field-Selectable 12/24VDC, 12-24VAC		Strength 1,500lbf Static 70ft-lb Dynamic
	Warranty 5 Year Limited Warranty		Mode Fail-Secure
	Endurance 250,000 Cycles		Monitoring Latch Monitor & Keeper Monitor Accessory Available

<sup>1</sup>Max at 12VDC

- A small footprint vertical rod strike to be used in single or double-door applications.
- This simple design requires a 63 mm x 33 mm cut-out in the frame.
- Total footprint of the strike does not exceed 104 mm x 50 mm x 16 mm.
- Horizontal adjustability of 8 mm for frame and door variations.
- Solenoid activated.
- Designed and suited to a minimum 52 mm (2-1/16") backset of the top latch.
- UL294 Listed for Access Control Unit Accessory (6th Edition).
- UL1034 burglary-resistant Listed.

### How To Order

VR166	x	32D
	x	LMKM

Example: **VR166 x 32D**



# RCI Electric Strikes




4 Series

## Modular Strike Inserts

Includes Lip Bracket & Hardware Pack

How To Order

		Voltage	
Fail-Safe	11-16VAC	01	
	12VAC/VDC	05	
	24VAC/VDC	08	
	12VDC	06	
	24VDC	09	
A	4	-	
	1	-Fail-Secure	
	3	-Fail-Safe	
		Mode	
Example:		<b>A41-05</b>	

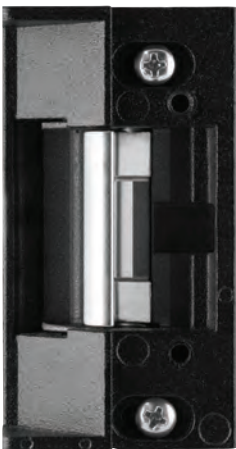

6 Series

## Modular Strike Inserts

Includes Lip Bracket & Hardware Pack

How To Order

			Options
A		65	LMKM – Latch And Keeper Monitor
	S		
	L		– Standard – Low Profile
			<b>Profile</b>
Example:			<b><u>AL65LMKM</u></b>



7 Series

## Modular Strike Inserts

Includes Lip Bracket & Hardware Pack

How To Order

		Voltage	
Fail-Safe	7	11-16VAC-	01
		12VDG-	05D
		24VAC-	07
		24VDC-	08D
		12VDC-	06
		24VDC-	09
A	7	-	
	1	-Fail-Secure	
	3	-Fail-Safe	
		Mode	
Example: <b>A71-05D</b>			

# RCI Electric Strikes

Electric Strikes

Keypads &amp; Readers


Switches

Locksets

Specialty Locks

Exit Devices

Power Supplies

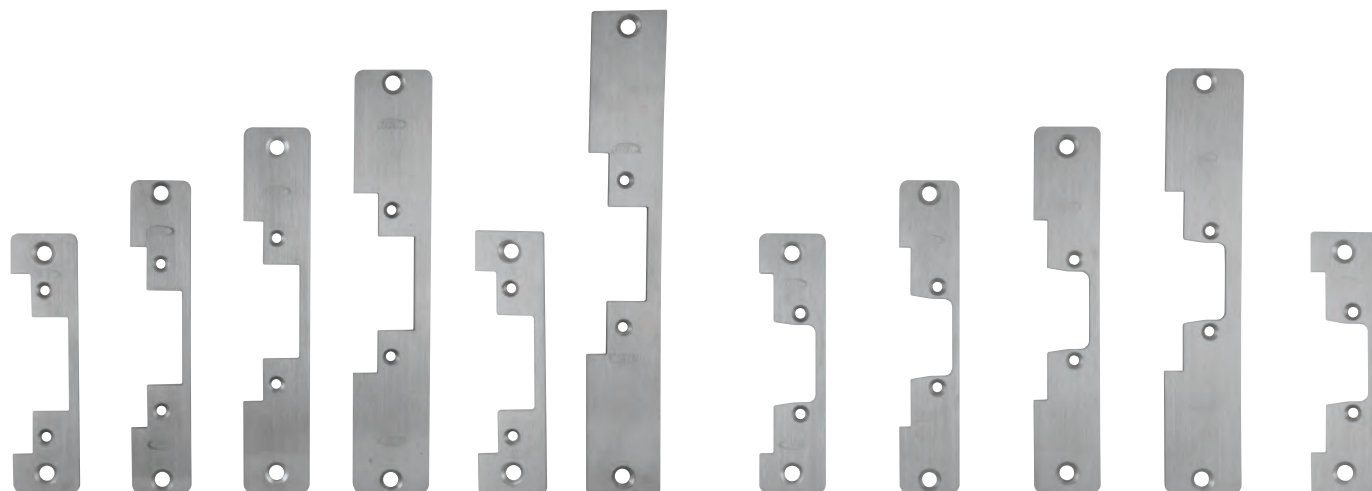

B4704

B4705

B4707

B4708

B4714

B4719

B604

B605

B607

B608

B614

## 4/7 Series

## Modular Strike Faceplates

## 6 Series

## Modular Strike Faceplates

### How To Order

Series	
6	-6 Series
47	-4 & 7 Series
B	- 32D
04	-1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI Radius Corner
05	-1-1/8"W x 5-7/8"H (29mm x 150mm), Radius Corners
07	-1-1/4"W x 6-7/8"H (32mm x 175mm), Radius Corners
08	-1-7/16"W x 7-15/16"H (37mm x 202mm), Radius Corners
14	-1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI Square Corners
19	-1-3/8"W x 9"H (34mm x 229mm), Square Corners <sup>1</sup>

### Faceplate

Example: **B4707-32D**

<sup>1</sup>Only available with 4 & 7 series

# RCI Electric Strikes Accessories



## Double Door Housing

Ideal for double door applications with no center mullion. Door housing is mounted on the inactive door.

Model	Description	Finish	Compatible with
0161DDH	Double door housing for 0161	SPC <sup>1</sup>	0161
0162DDH	Double door housing for 0162, 0163	SPC <sup>1</sup>	0162, 0163
0162DDHS	Double door housing for 0563	SPC <sup>1</sup>	0563

<sup>1</sup>SPC = Silver Powder Coat



## Latch Guards

Added tamper-resistance for perimeter doors. Helps guard the latch from a prying attack. Designed with radius cut for easy installation around lockset roses.

Model	Description	Finish	Compatible with
930-LG	Standard profile latch guard	32D	4/7 Series
940-LG	High profile latch guard	32D	F2/6/F1 Series



## Frame Prep Jigs

Aids in cutting of aluminum or metal frames, improving accuracy.

Model	Description	Finish	Compatible with
4/7JIG	Frame prep jig for ANSI-sized electric strike	Aluminum	4104/4304, 4114/4314, 7104/7304, 7114/7314
S6JIG	Standard profile frame prep jig	Aluminum	S6504, S6514
L6JIG	Low profile frame prep jig	Aluminum	L6504, L6514



## Lip Bracket Extension

Ideal for center-hung doors. Allows electric strike to be installed in frame and protects frame from damage.

Model	Description / Dimensions	Finish	Compatible with
LEK01	1" Lip extension kit for retrofit	Black	4/7 Series
LEK02	2" Lip extension kit for retrofit	Black	4/7 Series
LEK03	3" Lip extension kit for retrofit	Black	4/7 Series
LEKS601	1" Lip extension kit for retrofit (standard)	Black	S6 Series
LEKS602	2" Lip extension kit for retrofit (standard)	Black	S6 Series
LEKS603	3" Lip extension kit for retrofit (standard)	Black	S6 Series
LEKL601	1" Lip extension kit for retrofit (low profile)	Black	L6 Series
LEKL602	2" Lip extension kit for retrofit (low profile)	Black	L6 Series
LEKL603	3" Lip extension kit for retrofit (low profile)	Black	L6 Series



## Ice Pack

Heat reducer for continuous duty electric strikes. Operating voltage – 12 to 30VDC.

Model	Description / Dimensions	Compatible with
ICEPK	Heat reducer for continuous duty electric strikes	0/F1/2/4/6/7 Series



## Mounting Spacer Kits

Ideal for increasing latch depth.

Model	Description	Compatible with
0162MSK	1/16" mounting spacer for additional latch engagement	0162



## Security Hardware Packs

Model	Description	Compatible with
2SERIESHWK	Includes screws, bit, mounting tabs, allen key, shims, connector, deadbolt bracket and plug.	2 Series

# RCI Electric Strikes Accessories



## Strike Marking Template Kit

Ideal for accurately guiding prepping of the frame for the installation.

Model	Description	Finish	Compatible with
SMT-01	Strike Marking Template Kit	Aluminum	F2/4/6/7 Series



## Trim Plates

Ideal for concealing any imperfections caused while prepping the frame cut out.

Model	Description	Finish	Compatible with
TP-47-5PK	Trim Plate - 5 Pack	Black	4/7 Series
TP-L6-5PK	Low profile Trim Plate - 5 Pack	Black	L6 Series
TP-S6-5PK	Standard profile Trim Plate - 5 Pack	Black	S6 Series



## 2 Series Plug-In Latch Monitor

Latch monitor plug-in kit (2A @ 24VDC).

Model	Description	Compatible with
F2LM	Plug-in latch monitor kit (2A @ 24VDC). Improved design to accommodate 1/2" - 3/4" latch throw	F2164



## 2 Series Filler Plate

Filler plate (for use when replacing discontinued 2 Series models).

Model	Description	Compatible with
2FP	Filler plate for use when replacing discontinued 2 Series models	F2164/2364











## 6 Series Lip Bracket & Aluminum Faceplates

Model	Description	Compatible with
S6504DD	Lip bracket and aluminum faceplate for double doors with astragal (for S6504)	S6504
L6504DD	Lip bracket and aluminum faceplate for double doors with astragal (for L6504)	L6504
S6507DD	Lip bracket and aluminum faceplate for double doors with astragal (for S6507)	S6507
L6507DD	Lip bracket and aluminum faceplate for double doors with astragal (for L6507)	L6507


# RCI Electric Strikes

## Frame & Lock Type Reference Guide

		Frame Type			Lock Type				
									
		Wood	Aluminum	Hollow Metal	Mortise Exit Device	Pullman Latch	Centerline Cylindrical	Offset Mortise	Narrowline Aluminum
<b>0 Series</b> Rim Strikes	0161	•	•	•	-	•	-	-	-
	0162	•	•	•	-	•	-	-	-
	F0162	•	•	•	-	•	-	-	-
	0163	•	•	•	-	•	-	-	-
<b>F1 Series</b> Fire-Rated Centerline Strikes	F1114	-	•	•	-	-	•	-	-
	F1119	•	•	•	-	-	•	-	-
<b>2 Series</b> All-In-One Strikes	F2164/2364	•	-	•	•	-	•	•	-
<b>4 Series</b> Centerline Strikes	4104/4304	-	•	-	-	-	•	-	-
	4105/4305	•	•	•	-	-	•	-	-
	4107/4307	•	•	•	-	-	•	-	-
	4108/4308	•	•	•	-	-	•	-	-
	4114/4314	-	-	•	-	-	•	-	-
	4119/4319	•	•	•	-	-	•	-	-
	F4104	-	•	-	-	-	•	-	-
	F4114	-	-	•	-	-	•	-	-
	F4119	-	-	•	-	-	•	-	-
<b>6 Series</b> Centerline Strikes	S6504	-	•	-	-	-	•	-	-
	L6504	-	•	-	-	-	•	-	•
	S6505	•	•	•	-	-	•	-	-
	L6505	•	•	•	-	-	•	-	•
	S6507	•	•	•	-	-	•	-	-
	L6507	•	•	•	-	-	•	-	•
	S6508	•	•	•	-	-	•	-	-
	L6508	•	•	•	-	-	•	-	•
	S6514	-	-	•	-	-	•	-	-
	L6514	-	-	•	-	-	•	-	•
	S65U	•	•	•	-	-	•	-	-
	L65U	•	•	•	-	-	•	-	•
<b>7 Series</b> Centerline Strikes	7104/7304	-	•	-	-	-	•	-	•
	7105/7305	•	•	•	-	-	•	-	•
	7107/7307	•	•	•	-	-	•	-	•
	7108/7308	•	•	•	-	-	•	-	•
	7114/7314	-	-	•	-	-	•	-	•
	7119/7319	•	•	•	-	-	•	-	•
<b>Compact Strikes</b>	12C	•	-	•	-	-	•	-	-



# Keypads & Readers

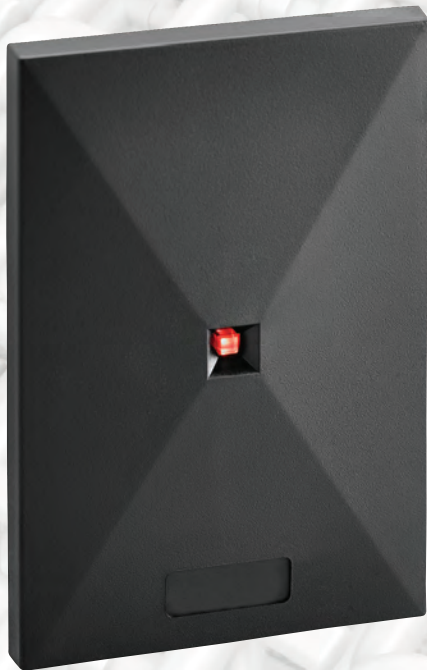

# RCI Keypads & Readers

Using RFID technology, RCI readers interface with a wide range of electronic access control systems by complying with the Wiegand communication protocol.



Interface  
26-Bit, Wiegand Output,  
HID® & AWID® Supported



Environment  
Rugged, Weather-  
Resistant Design



Warranty  
Lifetime Limited  
Warranty



Access Control  
Listed To UL 294

- Electronics are sealed in tamper and weather-resistant epoxy potting
- Includes black & beige snap-on covers

- Convenient plug-in wiring terminals
- Certifications: UL294 Listed for Access Control Unit Accessory, FCC, ICC, CE, ETL



## 5355R 125kHz Proximity Reader & Keypad Combo

Ideal for dual authentication or simple access via PIN or credential applications.  
3"W x 4-5/8"H x 3/4"D  
(76mm x 117mm x 19mm)

## 5395R 125kHz Proximity Reader

Compact design ideal for single gang wall-box applications.  
3"W x 4-5/8"H x 3/8"D  
(76mm x 117mm x 10mm)

## 6005R 125kHz Mullion Proximity Reader

Slim design ideal for areas with minimal surface space to mount.  
1-11/16"W x 3-3/16"H x 11/16"D  
(43mm x 80mm x 17mm)



Energy  
110mA<sup>1</sup>, +5 – 16VDC



Frequency & Range  
125kHz, Up to 5"  
(127mm)<sup>2</sup>

### How To Order

5355R



Energy  
110mA<sup>1</sup>, +5 – 16VDC



Frequency & Range  
125kHz, Up to 6-1/2"  
(165mm)<sup>2</sup>

### How To Order

5395R



Energy  
110mA<sup>1</sup>, +5 – 16VDC



Frequency & Range  
125kHz, Up to 5"  
(127mm)<sup>2</sup>

### How To Order

6005R

<sup>1</sup>Max at 12VDC

<sup>2</sup>Using 1326R Proximity Card (Clamshell) with 12VDC at the reader



# RCI Keypads & Readers



## 1326R 125kHz Proximity Clamshell Card

Passive proximity cards and fobs for physical access control.  
2-3/16"W x 3-3/8"H x 1/16"D  
(56mm x 86mm x 1.5mm)



Interface  
26-Bit, Wiegand,  
HID® & AWID®  
Supported



Frequency & Range  
125kHz  
Up to 6-1/2" (165mm)<sup>1</sup>

- Up to 5-1/2" (140mm) read range
- Off-white finish
- Made of ABS
- Lifetime limited warranty

<sup>1</sup>Using 5395R Proximity Reader at 12VDC



## 1386R 125kHz Proximity Printable Card

Passive proximity cards and fobs for physical access control.  
2-1/16"W x 3-3/8"H x 1/32"D  
(53mm x 86mm x 0.79mm)



Interface  
26-Bit, Wiegand,  
HID® & AWID®  
Supported



Frequency & Range  
125kHz  
Up to 6-1/2" (165mm)<sup>1</sup>

- Up to 5" (127mm) read range
- Glossy white finish
- Made of PVC
- 1 year limited warranty

<sup>1</sup>Using 5395R Proximity Reader at 12VDC



## 1314R 125kHz Proximity Thick Printable Card

Passive proximity cards and fobs for physical access control.  
2-1/16"W x 3-3/8"H x 1/16"D  
(53mm x 86mm x 1.17mm)



Interface  
26-Bit, Wiegand,  
HID® & AWID®  
Supported



Frequency & Range  
125kHz  
Up to 6-1/2" (165mm)<sup>1</sup>

- Up to 6-1/2" (165mm) read range
- Glossy white finish
- Made of PVC
- Lifetime limited warranty

<sup>1</sup>Using 5395R Proximity Reader at 12VDC



## 1346R 125kHz Proximity Fob

Passive proximity cards and fobs for physical access control.  
1-1/2"W x 1-3/16"H x 1/8"D  
(38mm x 30mm x 3.8mm)



Interface  
26-Bit, Wiegand,  
HID® & AWID®  
Supported



Frequency & Range  
125kHz  
Up to 6-1/2" (165mm)<sup>1</sup>

- Up to 4-1/2" (114mm) read range
- Gray finish
- Made of ABS
- Lifetime limited warranty

<sup>1</sup>Using 5395R Proximity Reader at 12VDC

### How To Order

Card Type				Quantity	
26	–Clamshell			10	–10 Pack
86	–Printable			25	–25 Pack
14	–Thick Printable			50	–50 Pack
46	–Fob				
13		R	–		
		H	–Certain HID®		
		A	–Certain AWID®		

**Supported Data Protocol<sup>1</sup>**

<sup>1</sup>RCI protocol standard, must specify HID® or AWID® if required

# RCI Keypads & Readers

## 9325 Keypads

Single door standalone access control solution for surface-mount applications.  
2-3/4"W x 4-1/2"H x 1-5/32"D (70mm x 114mm x 29mm)

	Energy 200mA Max 12VDC		Environment Rugged, Weather-Resistant Model Available
	Warranty 2 Year Limited Warranty		Mode Field-Selectable Fail-Safe & Fail-Secure
	Users Supports Up To 120 Users		

- Supports up to 120 users
- EEPROM memory ensures programming remains intact when unit is not powered
- Secure access codes (4-8 digits)
- Backlighting (can be disabled)
- Silent mode (audible annunciation of key presses can be disabled)
- Programmable lockout
- Variable output time delay (1-60 sec.)
- Input trigger for request-to exit or other open circuit contact
- Black finish

### How To Order

Type	
i	–Interior
E	–Exterior Illuminated
9212	



# RCI Keypads & Readers



## 9212i Keypad

Single door standalone access control solution for single gang flush mount applications.

For interior use.

2-3/4"W x 4-1/2"H x 1-1/4"D (70mm x 114mm x 32mm)



Energy  
45mA<sup>1</sup>  
Field-Selectable  
12-24VAC/VDC



Environment  
Rugged,  
Weather-Resistant  
Model Available



Warranty  
2 Year Limited  
Warranty



Mode  
Field-Selectable  
Fail-Safe & Fail-Secure



Interface  
EEPROM Memory



Users  
Supports Up To  
120 Users

- Four independent outputs (assignable by code) and timers
- All outputs programmable for latched or timed operation
- Supports up to 120 users
- EEPROM memory ensures programming remains intact when unit is not powered
- Single gang flush-mount design
- Secure access codes (4-8 digits)
- Silent mode (audible annunciation of key presses can be disabled)
- Electronics mounted on back of keypad
- Input trigger for request-to exit or other open circuit contact
- Three LED's to indicate status and provide user with visual PIN entry confirmation
- Red/Green LED's indicates relay status
- Stainless steel faceplate

### How To Order

#### Type

i -Interior  
iLW -Exterior

9212



## 9212iLW Illuminated Keypad

Single door standalone access control solution for single gang flush mount applications.

For interior or exterior use.

3-3/8"W x 5-1/8"H x 5/8"D (86mm x 130mm x 16mm)



Energy  
198mA<sup>1</sup>  
Auto-Sensing  
12-24VAC/VDC



Environment  
Rugged,  
Weather-Resistant  
Model Available



Warranty  
2 Year Limited  
Warranty



Mode  
Field-Selectable  
Fail-Safe & Fail-Secure



Interface  
EEPROM Memory



Users  
Supports Up To  
120 Users

- Backlit, hardened keys
- Heavy chrome plated trim ring
- Key press feedback via sounder and yellow LED
- Built-in assignable sounder
- Programmable lockout• Supports up to 120 users
- EEPROM memory ensures programming remains intact when unit is not powered
- Single gang flush-mount design
- Secure access codes (4-8 digits)
- Silent mode (audible annunciation of key presses can be disabled)
- Electronics mounted on back of keypad
- Input trigger for request-to exit or other open circuit contact
- Three LED's to indicate status and provide user with visual PIN entry confirmation
- Red/Green LED's indicates relay status
- Stainless steel faceplate

### How To Order

#### Type

i -Interior  
iLW -Interior or Exterior  
Illuminated


9212

# RCI Keypads & Readers




## 9321 Easy Read-Prox® Slimline Reader Reader + Controller


Two separate components, single-door standalone access control solution for surface or mullion mount for interior or exterior use.  
1-1/2"W x 3-1/16"H x 1/2"D (38mm x 78mm x 12.7mm)




Energy  
1,000mA<sup>1</sup>  
12VDC




Environment  
Rugged, Weather-  
Resistant Design




Warranty  
2 Year Limited Warranty



Read Range  
Up To 2-3/8" (60mm)<sup>2</sup>



Mode  
Field-Selectable  
Fail-Safe & Fail-Secure



Users  
Supports Up To  
10,000 Users

<sup>1</sup>Max  
<sup>2</sup>Using 932-10CP Card, 1-9/16" (40mm) using 932-10KP Fob

- Easy to install
- Supports up to 10,000 users
- Aesthetically pleasing surface or mullion mount design
- Access validation – Silent3/Audible/Visual
- Deny access without retrieving user's card or fob
- No separate programmer required
- Input trigger for request-to exit or other open circuit contact
- Includes black snap-on cover
- Proximity cards and fobs are available in packs of 10 (sold separately)

### How To Order

Type	
0	–Reader + Controller (One Self-Contained Unit)
1	–Reader + Controller (Two Separate Components)
1SPB	–Reader Only (No Control Board)
932	

### Accessories

Model	Description
932-10CP	Encoded card starter pack, 10 pack, includes wallet and programming cards
932-10KP	Encoded fob starter pack, 10 pack, includes wallet and programming cards

<sup>3</sup>Does not apply to 9321.

# RCI Keypads & Readers



## 9322 Easy Read-Prox® Micro Reader Reader + Stand Alone

One self-contained unit, single door standalone access control solution for flush mount applications for interior or exterior use. 1-3/16" W x 1-7/8" H x 5/16" D (29.5mm x 48mm x 8.5mm)



## 9323 Easy Read-Prox® Micro Readers Reader + Controller

Two separate components, single door standalone access control solution for flush mount applications for interior or exterior use. 1-3/16" W x 1-7/8" H x 5/16" D (29.5mm x 48mm x 8.5mm)



Energy  
1,000mA<sup>1</sup>  
12VDC



Environment  
Rugged, Weather-  
Resistant Design



Warranty  
2 Year Limited Warranty



Read Range  
Up To 2-3/8" (60mm)<sup>2</sup>



Mode  
Field-Selectable  
Fail-Safe & Fail-Secure



Users  
Supports Up To  
10,000 Users

<sup>1</sup>Max

<sup>2</sup>Using 932-10CP Card, 1-9/16" (40mm) using 932-10KP Fob

- Easy to install
- Supports up to 10,000 users
- Aesthetically pleasing flush mount design
- Access validation – Silent3/Audible
- Deny access without retrieving user's card or fob
- No separate programmer required
- Input trigger for request-to exit or other open circuit contact
- Includes black snap-on cover
- Proximity cards and fobs are available in packs of 10 (sold separately)

### How To Order

#### Type

2	–Reader + Controller (One Self-Contained Unit)
3	–Reader + Controller (Two Separate Components)
3MP	–Reader Only (No Control Board)

932

### Accessories

Model	Description
932-10CP	Encoded card starter pack, 10 pack, includes wallet and programming cards
932-10KP	Encoded fob starter pack, 10 pack, includes wallet and programming cards

<sup>3</sup>9322 only. Does not apply to 9323.



# Switches



# RCI Switches



## 906 Handicap Pushbutton

2-3/4"W x 4-1/2"H (70mm x 114mm)



Warranty  
2 Year Limited Warranty

- Blue, 1-3/4" (44mm) diameter button
- Available with handicap symbol screen printed or blank
- Quickly mounts to single gang surface or recessed electrical box
- Hardware kit includes stainless steel tamper-proof screws and spanner bit
- Momentary (2-SPST), maintained (2-SPST) or time-delay (DPDT) switches available
- Brushed Stainless Steel (32D) faceplate
- See accessories at end of this section

### How To Order

Type					
906	-	BH	-Handicap Symbol	-	x 32D
		B	-Blank		
		Momentary	MO		
		Maintained	MA		
		Time-Delay	TD		
Switch Mode					



## 908 Exit Pushbutton

2-3/4"W x 4-1/2"H (70mm x 114mm)



Warranty  
2 Year Limited Warranty

- Red, black or green, 1-9/16" (40mm) diameter button
- Available with engraved "EXIT" (English, French or Spanish) or blank
- Quickly mounts to single gang surface or recessed electrical box
- Hardware kit includes stainless steel tamper-proof screws and spanner bit
- Momentary (2-SPST), maintained (2-SPST) or time-delay (DPDT) switches available
- Brushed Stainless Steel (32D) faceplate
- See accessories at end of this section

### How To Order

		Type			
Color		E	– "EXIT", English		
Red <sup>1</sup>	R	F	– "EXIT", French		
Green	G	S	– "EXIT", Spanish		
Black	B	B	–Blank		
908	-		-	x	32D
		Momentary	–	MO	
		Maintained	–	MA	
		Time-Delay	–	TD	
Switch Mode					

<sup>1</sup>Standard



# RCI Switches



## 916 Tamper-Resistant Handicap Pushbutton

Standard: 3"W x 4-3/4"H (76mm x 121mm)  
Narrow: 1-5/8"W x 4-3/4"H (45mm x 121mm)

2

Year

Warranty  
2 Year Limited Warranty

- Blue, 1-3/4" (44mm) diameter button
- Available with handicap symbol screen printed or blank
- Quickly mounts to single gang box (Standard) or narrow-stile door frames (Narrow)
- Extruded aluminum 1/4" (6.4mm) plate with beveled edges for tamper-resistance and durability
- Hardware kit includes stainless steel tamper-proof screws and spanner bit
- Momentary (2-SPST), maintained (2-SPST) or time-delay (DPDT) switches available
- Faceplate available in Brushed Anodized Aluminum (28) or Brushed Anodized, Dark Bronze (40)
- See accessories at end of this section

### How To Order

		Type		Switch Mode	
Handicap Sym- bol—		BH	MO	—Momentary	
			MA	—Maintained	
			TD	—Time-Delay	
	Blank—	B			
916		-		-	x
Narrow—	N	Brushed Anodized Aluminum <sup>1</sup>		28	
		Brushed Anodized Dark Bronze		40	
Options		Faceplate Finish			

<sup>1</sup>Standard



## 918 Tamper-Resistant Exit Pushbutton

Standard: 3"W x 4-3/4"H (76mm x 121mm)  
Narrow: 1-5/8"W x 4-3/4"H (45mm x 121mm)

2

Year

Warranty  
2 Year Limited Warranty

- Red or green, 1-9/16" (40mm) diameter button
- Available with engraved "EXIT" (English, French or Spanish) or blank
- Quickly mounts to single gang box (Standard) or narrow-stile door frames (Narrow)
- Extruded aluminum 1/4" (6.4mm) plate with beveled edges for tamper-resistance and durability
- Hardware kit includes stainless steel tamper-proof screws and spanner bit
- Momentary (2-SPST), maintained (2-SPST) or time-delay (DPDT) switches available
- Faceplate available in Brushed Anodized Aluminum (28) or Brushed Anodized Dark Bronze (40)
- See accessories at end of this section

### How To Order

				Switch Mode		
		Type		MO	—Momentary	
		Red <sup>1</sup> —	R	MA	—Maintained	
		Green—	G	TD	—Time-Delay	
918		—		—	x	
Options	Narrow—	N	"EXIT", English	E	Brushed Anodized Aluminum <sup>1</sup>	28
			"EXIT", French	F	Brushed Anodized Dark Bronze	40
			"EXIT", Spanish	S		
			Blank	B		
			Type	Faceplate Finish		

<sup>1</sup>Standard

# RCI Switches



## 990 Oversized Tamper-Resistant Handicap Pushbutton

3"W x 4-3/4"H (76mm x 121mm)



Warranty  
2 Year Limited Warranty

- Blue, 2-3/8" (60mm) diameter button
- Available with handicap label or blank
- Quickly mounts to single gang surface or recessed electrical box or narrow-stile door frames (Narrow)
- Extruded aluminum 1/4" plate with beveled edges for tamper-resistance and durability
- Hardware kit includes stainless steel tamper-proof screws and spanner bit
- Momentary (2-SPST), maintained (2-SPST) or time-delay (DPDT) switches available
- Faceplate available in Brushed Anodized Aluminum (28) or Brushed Anodized, Dark Bronze (40) finish
- See accessories at end of this section

### How To Order

				Switch Mode	
Type				MO	-Momentary
Handicap Symbol		BH		MA	-Maintained
	Blank	B		TD	-Time-Delay
990		-		-	x
Narrow	N	Brushed Anodized Aluminum <sup>1</sup>			28
Brushed Anodized Dark Bronze					40
Options					
Faceplate Finish					

<sup>1</sup>Standard



## 990 Oversized Tamper-Resistant Exit Pushbutton

3"W x 4-3/4"H (76mm x 121mm)



Warranty  
2 Year Limited Warranty

- Red or green, 2-3/8" (60mm) diameter button
- Available with "EXIT" and "EMERGENCY" label (English, French or Spanish) or blank
- Quickly mounts to single gang surface or recessed electrical box
- Extruded aluminum 1/4" plate with beveled edges for tamper-resistance and durability
- Hardware kit includes stainless steel tamper-proof screws and spanner bit
- Momentary (2-SPST), maintained (2-SPST) or time-delay (DPDT) switches available
- Faceplate available in Brushed Anodized Aluminum (28) or Brushed Anodized, Dark Bronze (40) finish
- See accessories at end of this section

### How To Order

				Switch Mode	
Color				MO	-Momentary
Red	L	R		MA	-Maintained
Green		G		TD	-Time-Delay
990	-			-	x
Options	N	English	E	Brushed - Anodized Aluminum <sup>1</sup>	28
		French	F	Brushed - Anodized Dark Bronze	40
	Spanish	S		Faceplate Finish	
	Blank	B			
Type					

<sup>1</sup>Standard

# RCI Switches



## 991 Pneumatic Time Delay Exit Pushbutton

Standard (stainless steel): 2-3/4"W x 3"H (70mm x 76mm)  
 Standard Aluminum (Tamper Resistant): 2-3/4"W x 3"H (70mm x 76mm)  
 Narrow (Tamper Resistant): 1-5/8"W x 4-1/2"H (42mm x 76mm)




Warranty  
2 Year Limited Warranty

- Multiple selections; red or blue button
- Quickly mounts to single gang box (Standard) or narrow-stile door frames (Narrow)
- UL294 Listed
- 2-45 seconds adjustable time delay
- Assembled in Canada
- Faceplate available in Brushed Stainless Steel (32D) or Aluminum (28)
- Tamper-resistant fasteners included

### How To Order

R991BPTD9	Stainless Steel Faceplate, Blue Button with optional Handicap Logo Sticker
R991RBPTD9	Stainless Steel Faceplate, Red and Blank Button
R991RPTD9	Stainless Steel Faceplate, Red and PUSH TO EXIT Button
R991BPTD8	Aluminum Faceplate, Blue Button with optional Handicap Logo Sticker
R991RBPTD8	Aluminum Faceplate, Red and Blank Button
R991RPTD8	Aluminum Faceplate, Red and PUSH TO EXIT Button
R991NBPTD8	Narrow Aluminum Faceplate, Blue Button with optional Handicap Logo Sticker
R991NRBPTD8	Narrow Aluminum Faceplate, Red and Blank Button
R991NRPTD8	Narrow Aluminum Faceplate, Red and PUSH TO EXIT Button

# RCI Switches

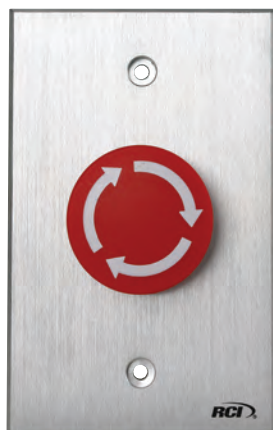

## 919 Rotary Release Pushbutton

3"W x 4-1/2"H (76mm x 114mm)



Warranty  
2 Year Limited Warranty

- Red, 1-3/4" (44mm) diameter button
- Quickly mounts to single gang surface or recessed electrical box
- Push the button once to engage; twist cap in direction of arrows to release
- Designed to prevent users from inadvertently re-engaging the lock
- Latching momentary action
- Button must be manually turned to reset
- Hardware kit includes stainless steel tamper-proof screws and spanner bit
- Maintained (2-SPST) switch operation
- Faceplate available in Brushed Anodized Aluminum (28) or Brushed Anodized, Dark Bronze (40) finish
- See accessories at end of this section

### How To Order

#### Faceplate Finish

Brushed Anodized – Aluminum <sup>1</sup>	28
Brushed Anodized – Dark Bronze	40
919 - MA x	

<sup>1</sup>Standard



## 920 Emergency Release Keyswitch/Pushbutton

2-3/4"W x 4-1/2"H (70mm x 114mm)



Warranty  
2 Year Limited Warranty

- Red, 1-9/16" (40mm) diameter button
- Quickly mounts to single gang surface or recessed electrical box
- Push the button once to engage; key required to reset
- Designed to prevent users from inadvertently re-engaging the lock
- Hardware kit includes stainless steel tamper-proof screws and spanner bit
- Maintained (2-SPST) switch operation
- Brushed Stainless Steel (32D) faceplate
- See accessories at end of this section

### How To Order

920 - MA x 32D

# RCI Switches



## 917 Easy Touch Pushbutton

2-3/4"W x 4-1/2"H (70mm x 114mm)

2  
Year

Warranty  
2 Year Limited Warranty

- Quickly mounts to single gang box, no mounting box required
- Handicap symbol and English, French and Spanish "Push to Exit" labels included
- Momentary switch operation (SPST)
- Virtually infinite lifetime
- Totally weather-proof
- Solid state (no moving parts)
- Pressure sensitive
- Architecturally elegant design
- Hardware kit includes Allen head screws and wrench
- Brushed Anodized Aluminum (28) faceplate
- See accessories at end of this section

How To Order

917 - MO x 28



## 972 All-In-One Illuminated Pushbutton

2-3/4"W x 4-1/2"H (70mm x 114mm)

2  
Year

Warranty  
2 Year Limited Warranty

<sup>1</sup>LED not included  
All-in-one button, reduces inventory SKU's

- Large 2" (51mm) square illuminated LED pushbutton
- Includes 3 messages, "Exit", "Push to Exit", and "Occupied When Lit" in English/Spanish or English/French; and a Handicap symbol
- Includes three colored lenses (green, red & clear)
- Quickly mounts to single gang box
- Hardware kit includes stainless steel tamper-proof screws and spanner bit
- Momentary switch operation (SPDT)
- Integrated 30 sec. fixed or adjustable delay timer option available
- SPDT switch is a UL recognized component
- ADA Compliant
- Brushed Stainless Steel (32D) faceplate
- See accessories at end of this section

How To Order

Options

TD30-30 Sec. Fixed Timer

TD30A-0-30 Sec. Adjustable Time

972 - ES - EF - MO x 32D

Language

# RCI Switches



## 970 Illuminated Exit Pushbutton

Standard: 3" W x 4-3/4" H (76mm x 121mm)  
Narrow: 1-5/8" W x 4-3/4" H (41mm x 121mm)



Warranty  
2 Year Limited Warranty

- Illuminated pushbutton
- Quickly mounts to single gang box (Standard) or narrow-stile door frames (Narrow)
- Extruded aluminum 1/4" (6mm) plate with beveled edges for tamper-resistance and durability
- Hardware kit includes stainless steel tamper-proof screws and spanner bit
- Momentary (2-SPST or 4-SPST), maintained (2-SPST or 4-SPST) or time-delay (DPDT) switches available
- 12 and 24VAC/VDC options available
- Optional audible alert add-on
- Blue (standard), yellow, green, red lens options
- Faceplate available in Brushed Anodized Aluminum (28) or Brushed Anodized, Dark Bronze (40) finish
- See accessories at end of this section

### How To Order

Lens		Faceplate Finish	
Blue <sup>1</sup>	B	Brushed Anodized Aluminum <sup>1</sup>	28
Yellow	Y		
Green	G		
Red	R	Brushed Anodized Dark Bronze	40
Options			
970	-	Audible Alert — A	x
Switch Mode			
Narrow — N	Momentary — MO	12VDC — 05	
	Maintained — MA	24VDC — 08	
	2x Momentary — DMO		
	2x Maintained — DMA		
	Time-Delay — TD		

<sup>1</sup>Standard



## 975 Illuminated Exit Pushbutton

Standard: 3" W x 4-3/4" H (76mm x 121mm)  
Narrow: 1-5/8" W x 4-3/4" H (41mm x 121mm)



Warranty  
2 Year Limited Warranty

- 1" (25mm) square illuminated LED pushbutton, green lens
- Quickly mounts to single gang box (Standard) or narrow-stile door frames (Narrow)
- Extruded aluminum 1/4" (6mm) plate with beveled edges for tamper-resistance and durability
- Hardware kit includes stainless steel tamper-proof screws and spanner bit
- 12 and 24VAC/VDC options available
- Faceplate available in Brushed Anodized Aluminum (28) or Brushed Anodized, Dark Bronze (40) finish
- Momentary (2-SPST) or time-delay (DPDT) switches available
- See accessories at end of this section

### How To Order

Switch Mode		Voltage	
Momentary — MO	05	—12VAC/ VDC	
Time-Delay — TD	08	—24VAC/ VDC	
975	-		x
Options			
Narrow — N		Brushed Anodized Aluminum <sup>1</sup>	28
		Brushed Anodized Dark Bronze	40
Faceplate Finish			

<sup>1</sup>Standard



# RCI Switches



## 980 Economy Pushbutton

2-3/4"W x 4-1/2"H (70mm x 115mm)

2  
Year

Warranty  
2 Year Limited Warranty

- Quickly mounts to single gang box
- Hardware kit includes stainless steel tamper-proof screws and spanner bit
- Momentary (SPST), maintained (SPST) or time-delay (DPDT) switches available
- White cap with black trim
- Brushed Stainless Steel (32D) faceplate
- See accessories at end of this section

How To Order

Switch Mode				
MO	-	Momentary		
MA	-	Maintained		
TD	-	Time-Delay		
980	-		x	32D



## 903 Audible Alert

3"W x 4-3/4"H (76mm x 121mm)

2  
Year

Warranty  
2 Year Limited Warranty

- For remote or local monitoring
- Quickly mounts to single gang box (Standard) or narrow stile door frames (Narrow)
- Extruded aluminum 1/4" (6mm) plate with beveled edges for tamper-resistance and durability
- Hardware kit includes stainless steel tamper-proof screws and spanner bit
- Push-on wire connectors included
- Field-selectable continuous or intermittent tone (80-96dB)
- 30mA, 10-26VDC
- Available in Brushed Anodized Aluminum (28) or Brushed Anodized Dark, Bronze (40) finish
- See accessories at end of this section

How To Order

Options				
	N	-	Narrow stile	
903		x		
Brushed Anodized — Aluminum <sup>1</sup>			28	
Brushed Anodized — Dark Bronze			40	
Faceplate Finish				

<sup>1</sup>Standard

# RCI Switches



## 960 Tamper-Resistant Keyswitch

Standard: 3" W x 4-3/4" H (76mm x 121mm)  
Narrow: 1-5/8" W x 4-3/4" H (41mm x 121mm)  
Key cylinder sold separately.



Warranty  
2 Year Limited Warranty

- Quickly mounts to single gang box (Standard) or narrow-stile door frames (Narrow)
- Extruded aluminum 1/4" plate with beveled edges for tamper-resistance and durability
- One-piece bracket with two-position switch holder
- Compatible with standard mortise cylinders with straight or clover cams in 1-1/8" or 1-1/4" cylinder lengths (1-1/4" key cylinders available)
- Momentary (SPDT/DPDT), maintained (SPDT/DPDT) or time-delay (2-SPDT) switches available
- Hardware kit includes stainless steel tamper-proof screws and spanner bit
- Faceplate available in Brushed Anodized Aluminum (28) or Brushed Anodized, Dark Bronze (40) finish
- See accessories at end of this section

### How To Order

Options				Faceplate Finish	
DPDT <sup>1</sup> — D				Brushed Anodized — Aluminum <sup>3</sup>	28
960 — — — —				Brushed Anodized Dark — Bronze	40
Narrow-Stile — N				x	
Options				Switch Mode	
Momentary — MO				MO	—Momentary
Maintained — MA				MA	—Maintained
Time-Delay — TD				TD	—Time-Delay
				Options <sup>2</sup>	

<sup>1</sup>Only available with MO and MA switch mode

<sup>2</sup>Second switch

<sup>3</sup>Standard

### Accessories

Model	Description
96-CYLKA	Mortise cylinder, straight cam, keyed alike
96-CYLKD	Mortise cylinder, straight cam, keyed differently

See page 62 for additional accessories



## 960RO Tamper-Resistant Keyswitch with Reset/Override

Standard: 3" W x 4-3/4" H (76mm x 121mm)  
Narrow: 1-5/8" W x 4-3/4" H (41mm x 121mm)  
Key cylinder sold separately.



Warranty  
2 Year Limited Warranty

- Quickly mounts to single gang box
- Extruded aluminum 1/4" plate with beveled edges for tamper-resistance and durability
- One-piece bracket with two-position switch holder
- Compatible with standard mortise cylinders with straight or clover cams in 1-1/8" or 1-1/4" cylinder lengths (1-1/4" key cylinders available)
- Momentary (SPDT/DPDT), maintained (SPDT/DPDT) or time-delay (2-SPDT) switches available
- Hardware kit includes stainless steel tamper-proof screws and spanner bit
- Screen-printed reset/override with directional arrows indicate the function of corresponding switch model
- Brushed Anodized Aluminum (28)
- See accessories at end of this section

### How To Order

Options				Options <sup>2</sup>	
D — DPDT <sup>1</sup>				MO	—Momentary
960RO — — — —				MA	—Maintained
Narrow-Stile — N				x	28
Options				Switch Mode	
Momentary — MO				MO	—Momentary
Maintained — MA				MA	—Maintained
Time-Delay — TD				TD	—Time-Delay
				Options <sup>2</sup>	

<sup>1</sup>Only available with MO and MA switch mode

<sup>2</sup>Second switch

### Accessories

Model	Description
96-CYLKA	Mortise cylinder, straight cam, keyed alike
96-CYLKD	Mortise cylinder, straight cam, keyed differently

See page 62 for additional accessories

# RCI Switches



## 904P Emergency Pull Station

3-9/16"W x 4-1/2"H (91mm x 114mm)



Warranty  
2 Year Limited Warranty

- Heavy-duty polycarbonate design with easy to lift clear Lexan cover
- All-in-one design includes English, French and Spanish labels to apply during installation
- Mounts over standard surface or recessed electrical utility box
- Maintained (DPDT) switch operation
- 3A at 125VAC
- Available in Blue finish

### How To Order

904P	x	
Blue <sup>1</sup>		B
<b>Finish</b>		
<sup>1</sup> Standard		



## 909 Rocker Switch

Surface-mount: 2-7/16"W X 2-7/16"H x 7/8"D (61mm x 61mm x 22mm)  
Flush-mount: 3-7/16"W x 3-7/16"H x 5/8"D (87mm x 87mm x 16mm)



Warranty  
2 Year Limited Warranty

- Ideal for desk or wall mount applications
- Surface-mounts under desk or counter for concealment
- Smooth action rocker with key symbol
- Field selectable momentary (SPDT) and maintained (SPDT)
- 10A at 250VAC
- Beige finish
- See accessories at end of this section

### How To Order

		<b>Mount</b>			
		S	-Surface		
		F	-Flush		
909		-		x	B
		MO	-Momentary		
		MA	-Maintained <sup>1</sup>		
		<b>Switch Mode</b>			

<sup>1</sup>Available in surface-mount design only



## 913 Microwave Motion Switch

4-5/8"W x 4-5/8"H (117mm x 117mm) &  
2-3/4"W x 4-5/8"H (70mm x 117mm)



Warranty  
2 Year Limited Warranty

- Doppler radar technology allows for use in sterile environments (i.e. healthcare, food processing plants)
- It can be placed unobtrusively in a room or hallway when mounted behind a non-reflective surface for a clean non-visible solution
- Includes single and double gang plate
- Variable adjustment of pattern depth from 4" to 24" (102mm – 610mm)
- No wearing parts mean increased product life
- Water-resistant foam gasket provides increased durability when product is exposed to water or cleaning product
- 12 to 24 VDC/VAC
- Contact rated at 1A
- Available in Black, Cream or White finish
- Certifications: EMC, FCC, IC

### How To Order

<b>Finish</b>		
Black	-	B
Cream	-	CR
White	-	W
913	x	



## 914 Sounder

4-3/4"W x 5-9/16"H (119mm x 142mm)



Warranty  
2 Year Limited Warranty

- Ideal for delayed egress applications
- Field-selectable volume output up to 102db
- Models available for interior or exterior applications
- Not suitable for mounting on ceilings
- Easy installation - surface wall mounted
- 63mA, 12-24VAC
- Available in White or Red

### How To Order

		<b>Type</b>			
		WPR	-Weather-Proof, Red Finish		
		W	-White Finish		
914					

<sup>1</sup>Only available in red finish

# RCI Switches



## 915 Passive Infrared

Hands-free egress switch.  
6-1/4"W x 1-13/32"H x 1-1/2"D  
(159mm x 36mm x 38mm)



Warranty  
2 Year Limited Warranty

- Field-Selectable 12/24VDC
- 38mA max at 24VDC, 35mA at 12VDC
- Hands free release for electromagnetic locks
- Ideal for "request to exit" with electromagnetic locks
- Adjustable setting for precise detection area desired
- Adjustable-relay latch time delay (2-60 sec)
- Two Form C relays (rated 2A at 30VDC)
- SPDT switch configuration
- Available in Gray or Black

### How To Order

#### Finish

Black	-	B
Gray	-	G
915	x	



## 915AFI Active Focused Infrared

6-7/8"W x 1-7/8"H x 2"D (175mm x 48mm x 51mm)



Warranty  
3 Year Limited Warranty

- Mounts on or above the door frame with infrared beam directed near door hardware for pinpoint accuracy and operation, preventing circumvented entry by sliding objects under the door.
- Multiple relocking modes for any timed or door position conditions
- Relay output consists of two Form "C" contacts for NO/NC wiring
- Integrated local sounder with adjustable volume and activation LEDs
- 3 additional auxiliary inputs: request to exit, card reader and a door position switch
- 12 to 24 VDC/VAC
- Black finish
- Certifications: UL 294/ULC S319

### How To Order

915AFI x B

# RCI Switches



## 946 Square Push Plate

4-1/2" Sq. (114mm)  
4-3/4" Sq. (121mm)  
6" Sq. (152mm)



Warranty  
Lifetime Limited Warranty

- Available in three sizes
- Momentary (SPDT) switch operation, DPDT accessory kit available
- Tamper-resistant
- Brushed Stainless Steel (32D) finish
- See accessories at end of this section

### How To Order

Type		Finish	
P	-Push to Open	32D	-Brushed Stainless Steel
H	-Handicap Symbol	BLU	-Blue
HP	-Handicap Symbol + Push to Open		
946		-	MO x
4-1/2" (114mm) <sup>1</sup>	45	Options	
4-3/4" (121mm)	475		
6" (152mm)	6		
Size			

<sup>1</sup>Only available with HP type

### Accessories

Model	Description
9466SUR	Surface-mount box for 6" push plate
946475SUR	Surface-mount box for 4.75" push plate
94645SUR	Surface-mount box for 4.5" push plate
9466FLU	Flush mount box for 6" push plate
946475FLU	Flush mount box for 4.75" push plate
946475WR	Weather ring for 4.75" push plate
946DGPLATE	Back plate for double gang electrical box
9464PLAST	Double gang mount box
P94/5DMO	DPDT accessory kit

See page 56 for additional accessories



## 950 Round Push Plate

4-1/2" Dia. (114mm)  
6" Dia. (152mm)



Warranty  
Lifetime Limited Warranty

- 4-1/2" buttons designed for 2" x 4" (51mm x 102mm) switch boxes and 6" buttons designed for 4" x 4" x 1-1/2" (102mm x 102mm x 38mm) junction boxes
- Available in two sizes
- Momentary (SPDT) switch operation, DPDT accessory kit available
- Tamper-resistant
- Brushed Stainless Steel (32D) finish
- See accessories at end of this section

### How To Order

Type		Finish	
P	-Push to Open	32D	-Brushed Stainless Steel
H	-Handicap Symbol	BLU	-Blue
HP	-Handicap Symbol + Push to Open		
950		-	MO x
4-1/2" (114mm)	45	Options	
6" (152mm)	6		
Size			

### Accessories

Model	Description
9466SUR	Surface-mount box for 6" push plate
946475SUR	Surface-mount box for 4.75" push plate
94645SUR	Surface-mount box for 4.5" push plate
9466FLU	Flush mount box for 6" push plate
946475FLU	Flush mount box for 4.75" push plate
946475WR	Weather ring for 4.75" push plate
946DGPLATE	Back plate for double gang electrical box
9464PLAST	Double gang mount box
P94/5DMO	DPDT accessory kit

See page 56 for additional accessories

# RCI Switches



## 946T Square Short-Range Touchless Actuator

4-3/4" Sq. (121mm)



Warranty  
Lifetime Limited Warranty

- Low-profile touchless actuator plate utilizing unique capacitive technology for the activation of automatic doors
- Illuminated LED mounting ring for unparalleled durability, visibility and convenience
- Hands-free – helps reduce the spread of germs and bacteria
- Short-range adjustable detection zone reduces unwanted activations
- Adjustable visual and audible alerts
- Field-selectable 12-24 VAC/VDC, 37mA typical
- NEMA 4-rated enclosure
- Made of stainless steel (faceplate) and clear polycarbonate (mounting ring, backplate and enclosure)
- Momentary (SPDT) switch operation
- Certifications & testing:
  - ANSI – American National Standards Institute
  - AAADM – American Association of Automatic Door Manufacturers
  - AIA – American Institute of Architects
  - FCC – Federal Communications Commission
  - IDA – International Door Association
  - DASMA – Door & Access Systems Manufacturers Association
  - NEMA 4 – National Electrical Manufacturers Association
- See accessories at end of this section

### How To Order

Type						
	H	–Handicap & Wave Symbol				
	HW	–Handicap & Wave Symbol & "Wave To Open"				
	W	–"Wave To Open" & Wave Symbol				
946T		475	-	MO	x	32D



## 950T Round Short-Range Touchless Actuator

6" Dia. (173mm x 152mm)



Warranty  
Lifetime Limited Warranty

- Low-profile touchless actuator plate utilizing unique capacitive technology for the activation of automatic doors
- Illuminated LED mounting ring for unparalleled durability, visibility and convenience
- Hands-free – helps reduce the spread of germs and bacteria
- Short-range adjustable detection zone reduces unwanted activations
- Adjustable visual and audible alerts
- Field-selectable 12-24 VAC/VDC, 37mA typical
- NEMA 4-rated enclosure
- Made of stainless steel (faceplate) and clear polycarbonate (mounting ring, backplate and enclosure)
- Momentary (SPDT) switch operation
- Certifications & testing:
  - ANSI – American National Standards Institute
  - AAADM – American Association of Automatic Door Manufacturers
  - AIA – American Institute of Architects
  - FCC – Federal Communications Commission
  - IDA – International Door Association
  - DASMA – Door & Access Systems Manufacturers Association
  - NEMA 4 – National Electrical Manufacturers Association
- See accessories at end of this section

### How To Order

Type						
	H	–Handicap & Wave Symbol				
	HW	–Handicap & Wave Symbol & "Wave To Open"				
	W	–"Wave To Open" & Wave Symbol				
950T		6	-	MO	x	32D







# RCI Switches



## ILO6 Controller Barrier free washroom controller

Recent building code changes require several enhancements to meet Barrier Free Washroom requirements, with emphasis on emergency assistance. RCI's new ILO6 controller meets and exceeds these requirements.

	Energy Input 12-24VDC		Energy Output 6 1A @ 24VDC relay outputs SPDT
	Indicators 14 red/green I/O indicators; 3 digit 8-segment LED display		Input/Output 6 individual inputs and outputs

### 7 pre-programmed functions (with room for additional functions):

- Function #1: Barrier-free washroom control with emergency call.
- Function #2: Barrier-free washroom control with controlled access and emergency call.
- Function #3: Communicating washroom with auto-operator control and emergency call.
- Function #4: Communicating washroom with emergency call.
- Function #5: 2-Door security interlock with emergency release (mantrap - closed and locked continuous).
- Function #6: 2-Door safety interlock with emergency release (air lock - closed and unlocked).
- Function #7: Multi-zone control.

### 6-zone control interface

ILO6 sold as a single controller or as part of a complete kit (ILO6KT) that includes the following items:

- ILO6 door controller
- Interior & exterior handicap push plates
- Push to lock button
- Interior & exterior annunciator (audible/visual indicators)
- Surface applied door contact
- Emergency call sign (will vary by province & state)

# RCI Switches



## 910TC Touchless Switch 910TC-HC Touchless Switch 910TC-SS Stainless Steel Touchless Switch

2-15/16"W x 4-11/16"H



Warranty  
2 Year Limited Warranty

- Unique low-profile touchless actuator plate utilizing capacitive technology for the activation of automatic doors.
- Aesthetically pleasing design.
- Hands-free – helps reduce the spread of germs and bacteria.
- Adjustable detection zone to reduce unwanted activations.
- When the device is activated, the indicator light (waving hand) will change color.
- Two plate designs to select from
- Secondary Normally Open (NO) mechanical switch in the event of a power loss.
- Selectable unlock times (1-63 seconds).
- Mounts on single-gang electrical box.
- Available remote control to trigger switch remotely.
- May be purchased as a kit (910TC-WRM-WRB). Includes 910TC Switch, 910TC-WRM Remote Receiver Module and 910TC-WRB Remote Transmitter.
- Also available with Stainless Steel plate
- Certifications & testing:
  - FCC
  - ISED
- Meets ADA compliance to ANSI/BHMA A156.19. (Always check local building codes for compliance in your area)
- See accessories at end of this section

### How To Order

		Type
910TCHC-SS	WRM-WRB	–Remote Module & Remote Transmitter
910TC-SS	WRM	–Remote Module
910TC	WRB	–Remote Transmitter
910TC-HC	-	Gesture control touchless switch
		Gesture control touchless switch (with wheelchair plate icon)

# RCI Switches



## 912-WBT Battery powered; touch-free actuator

## 912N-WBT Battery powered; touch-free actuator (narrow)

## 912GL-WBT Battery powered; touch-free actuator

(glass & marble surfaces)

912-WBT: 5" x 5" W x 1.75"

912N-WBT: 4.75" x 2" x 1.75"

912GL-WBT: 3.375" x 3.375" x 0.565"



Warranty  
1 Year Limited  
Warranty

- Infrared Motion Detection Technology
- Touch Free Activation with hand or reflective object provides clean and hygienic activation (less than 130 ms)
- Silent activation for hospitals and other noise-sensitive environments
- 2.4Ghz transmitter and receiver (line of site +30 meters/100ft)
- Receiver voltage input 12~30 VDC
- Low power consumption providing long battery life (batteries not included)
- Detection distance is adjustable from 3~30 cm (1"-12")
- SPDT relay output can be used for signaling/switching automatic doors and access control (3A @ 30VDC)
- Selectable activation output between 1.5 seconds or "latching", meaning activation "on", activation "off"
- FCC, CE certified

### How To Order

Parts	Description	Parts	Description
912-WBT	1 switch (waving hand)	912GL-WBT	1 switch (waving hand)
912-WBT-HC	1 switch (wheelchair)	912GL-WBT-HC	1 switch (wheelchair)
912-WBT-R	1 switch & receiver (waving hand)	912GL-WBT-R	1 switch & 1 receiver (waving hand)
912-2WBT-R	2 switches & receiver (waving hand)	912GL-2WBT-R	2 switches & 1 receiver (waving hand)
912-WBT-R-HC	1 switch & receiver (wheelchair)	912GL-2WBT-R-HC	2 switches & 1 receiver (wheelchair)
912-2WBT-R-HC	2 switches & receiver (wheelchair)	912GL-WBT-R-HC	1 switch & 1 receiver (wheelchair)
912N-WBT	1 narrow switch (waving hand)		
912N-WBT-HC	1 narrow switch (wheelchair)		
912N-WBT-R	1 narrow switch & receiver (waving hand)		
912N-2WBT-R	2 narrow switches & receiver (waving hand)		
912N-WBT-R-HC	1 narrow switch & receiver (wheelchair)		
912N-2WBT-R-HC	2 narrow switches & receiver (wheelchair)		

# RCI Switches



## 940 Rectangular Push Plate

2-3/4" W x 4-1/2" H (70mm x 114mm)



Warranty  
Lifetime Limited Warranty

- Large rectangular faceplate
- Beveled edges provide a tamper and vandal resistant solution
- Universal touch area; push at any location
- Momentary (SPDT) switch operation, DPDT accessory kit available
- Text and symbols are baked onto the surface for maximum durability
- Brushed Stainless Steel (32D) finish
- See accessories at end of this section

### How To Order

Type				
H	-	Handicap Symbol		
HP	-	Handicap Symbol + Push to Open		
PTE	-	Push to Exit		
B	-	Blank		
940	-		x	32D
		MO	-	Momentary (SPDT) <sup>1</sup>
Switch Mode				

<sup>1</sup>Standard

### Accessories

Model	Description
940SUR	Surface-mount box
P94/5DMO	DPDT accessory kit

See page 62 for additional accessories

# RCI Switches



## 941 Mullion Push Plate

1-1/2"W x 4-3/4"H (38mm x 121mm)



Warranty  
Lifetime Limited Warranty

- Narrow design makes an easy application on guide rails and swing doors
- Beveled edges provide a tamper and vandal resistant solution
- Universal touch area; push at any location
- Momentary (SPDT) switch operation, DPDT accessory kit available
- Text and symbols are baked onto the surface for maximum durability
- Available in Brushed Stainless Steel (32D) or Blue (BLU) finish
- See accessories at end of this section

### How To Order

Type							Finish	
	P	-Push To Open						
	H	-Handicap Symbol						
	HP	-Handicap Symbol + Push To Open					32D	-Brushed Stainless Steel Finish
	B	-Blank <sup>1</sup>					BLU	-Blue
941			-	MO		x		
	MICRO		-Micro-Switch <sup>2</sup>					

### Options

<sup>1</sup>Available only in 32D finish

<sup>2</sup>Available only with HP and H type in 32D finish

### Accessories

Model	Description
941SUR	Surface-mount box
941FLU	Flush mount box
P94/5DMO	DPDT accessory kit

See page 62 for additional accessories

# RCI Switches



## 9LP36 Low Profile Push Plate

6"W x 36"H (152mm x 915mm)



Warranty  
3 Year Limited Warranty

- An all-active plate activates with any "push" location
- Can be mounted to any flat surface using concealed fasteners for aesthetics and to minimize vandalism
- Easily adapts to either a wireless or hardwired installation
- Optional built-in wireless transmitter comes pre-installed in the top end cap
- UL Listed push plate for pedestrian door activation under UL325 for US and Canada
- Exceeds the California Building Code, Section 1117B.6
- Exceeds Ontario Building Code, Sections A-3.8.3.3 (17) and A-3.8.1.5
- Brushed Stainless Steel (32D) finish

### How To Order

#### Type

HW	-For Hardwire Installation
433	-For Wireless Installation (433MHz Transmitter)

9LP36 - x 32D



## 9RCT433/9DRCR433 Transmitters & Receivers

2-3/4"W x 2-1/8"H x 1"D  
(70mm x 55mm x 14mm)



- An all-active plate activates with any "push" location
- Can be mounted to any flat surface using concealed fasteners for aesthetics and to minimize vandalism
- Easily adapts to either a wireless or hardwired installation
- Optional built-in wireless transmitter comes pre-installed in the top end cap
- UL Listed push plate for pedestrian door activation under UL325 for US and Canada
- Exceeds the California Building Code, Section 1117B.6
- Exceeds Ontario Building Code, Sections A-3.8.3.3 (17) and A-3.8.1.5
- Brushed Stainless Steel (32D) finish

### How To Order Transmitter

9RCT433	
1	-One Button
2	-Two Buttons
3	-Three Buttons
4	-Four Buttons
3V1	-One Button Wired With 3V Battery
9V1	-One Button Wired With 9V Battery Lead
<b>Type</b>	

### How To Order Receiver

9DRCR433	
VB	-Receiver
EHT	-Receiver With Extended Hold Time
<b>Type</b>	



# RCI Switches



**9500**  
2 Pin

## 9500/9501 Mortise Pin Transfers

1/2" W x 2-3/4" H (13mm x 71mm)



Warranty  
5 Year Limited Warranty



**9501**  
3 Pin

- Recessed in the hinge side of the door/frame and concealed when the door is closed for tamper-resistance
- 1.5A at 24VAC
- Made of nickel-plated brass and plastic
- White finish

### How To Order

Type	
0	-2 Pin Contact
1	-3 Pin Contact
950	



## 9507/9509 Flex Loops



Warranty  
2 Year Limited Warranty

### 9507

- Surface-mounted on hinge side
- Accepts 4-conductor @ 22 gauge or 2-conductor @ 18 gauge (not included)
- Made of stainless steel coated brass
- Available in Silver, Brown and White finish

### 9509

- Surface-mounted on hinge side
- Heavy-duty flex loop with increased conductor capacity
- Accepts 16-conductor @ 22 gauge or 8-conductor @ 18 gauge (not included)
- Made of stainless steel
- Silver finish

### How To Order

Type		Finish	
Standard	7	Silver <sup>1</sup>	S
Heavy-Duty	9	Brown	B
		White	W
950		-	
Length			
7" (178mm)		7	
12" (305mm)		12	
18" (457mm)		18	
24" (610mm)		24	
36" (914mm)		36	

<sup>1</sup>9509 available in Silver only



## 9520/9521/9522 9523/9524 Electrified Hinges

- 9520** 4" x 4" (102mm x 102mm)
- 9521** 4-1/2" x 4" (114mm x 102mm)
- 9522** 4-1/2" x 4-1/2" (114mm x 114mm)
- 9523** 5" x 4-1/2" (127mm x 114mm)
- 9524** 5" x 5" (127 mm x 127mm)



Warranty  
3 Year Limited Warranty

- Five knuckle
- Standard weight
- Fully mortised in the hinge stile and concealed when the door is closed for tamper-resistance
- Made of steel
- 6-conductors (4 at @ 22 gauge, 2 @ 18 gauge) included
- Available in Brushed Chrome (26D) or Brushed Stainless Steel (32D) finish

### How To Order

Size	
0	-4" x 4" (102mm x 102mm)
1	-4-1/2" x 4" (114mm x 102mm)
2	-4-1/2" x 4-1/2" (114mm x 114mm)
3	-5" x 4-1/2" (127mm x 114mm)
4	-5" x 5" (127 mm x 127mm)
952	
Finish	
Brushed Chrome	26D
Brushed Stainless Steel	32D

# RCI Power Transfers and Door Contacts



## 9512/9513 Bridge Cables

**9512** Visible face: 1"W x 12-3/4"H (25mm x 324mm)  
Recessed: 7/8"W x 10-3/16"H (23mm x 259mm)

**9513** Visible face: 1"W x 21-7/16"H (25mm x 545mm)  
Recessed: 7/8"W x 18-7/8"H (23mm x 479mm)



Warranty  
1 Year Limited Warranty

- Recessed in the hinge side of the door/frame and concealed when door is closed for tamper-resistance
- 4-conductor @ 22 gauge or 2-conductor @ 18 gauge
- Made of steel
- Bright Chrome (26) finish

### How To Order

Type			
	2	-12-3/4" H (324mm)	
	3	-21-7/16" H (545mm)	
951	x	26	



## 9540 Recessed Magnetic Contact/Door Position Switch

3/4"W x 3/4"H x 7/8"D  
(19mm x 19mm x 22mm)



Warranty  
Lifetime Limited Warranty

- 200mA Max, 30VAC/VDC
- 3/4" (19mm) dia. recessed magnetic contact
- 12" #22 AWG wire leads
- Rare earth magnet
- Self-locking in steel and wood
- End-of-line resistors, diodes and supervisory
- Loop type: open/closed
- SPDT configuration
- Available in White or Black finish

### How To Order

9540	x	
White	—	W
Black	—	B
Finish		



## 9530 Balanced Magnetic Contact/Door Position Switch

3-1/2"W x 1-1/4"H x 5/8"D  
(89mm x 32mm x 16mm)



Warranty  
Lifetime Limited Warranty

- 50mA Max, 100VDC
- Surface-mount switch and magnet
- Utilizes two Form C high reliability Rhodium plated reed switches, one of the two reed switches being of different sensitivity, encapsulated in epoxy inside a solid aluminum case
- SPDT switch configuration with magnetic tamper
- When the rare earth magnet is in place and properly adjusted (balanced), the magnetic tamper switch 2 will be in a state opposite to the switch 1
- This normal configuration will change should one of the following occur; (1) switches 1 and 3 will change state by either the deliberate shunting of the magnetic field or if the door window is opened, and (2) the addition of a magnetic field such as an external magnet will cause the magnetic tamper switch 2 to change state
- End-of-line resistors may be used to allow a predetermined trickle of current to flow and permit operation from a supervised line at all times
- 18" Armored Cable, #22 AWG Wire Leads

### How To Order

9530

# RCI Switches Accessories



## TD30/TD30A Timer Delay

Model	Description
TD30	30 sec. fixed timer (12/24VDC)
TD30A	0 to 30 sec. adjustable timer (12/24VDC)



## 910TC-WRM Remote Receiver Module

Model	Description
910TC-WRM	433MHz remote receiver module



## 910TC-WRB Remote Transmitter

Model	Description
910TC-WRB	433MHz remote transmitter


## P94/5DMO DPDT Switch Kit

Model	Description
P94/5DMO	DPDT momentary contact switch kit


## Compatibility

Model	9SURBOX	TD30	TD30A	P94/5DMO
903 Audible Alert	•	-	-	-
904P Emergency Pull Station	•	-	-	-
906 Handicap Pushbutton	•	•	•	-
908 Exit Pushbutton	•	•	•	-
909 Rocker Switch	-	•	•	-
916 Tamper-resistant Handicap Pushbutton	•	•	•	-
917 Easy Touch Pushbutton	•	•	•	-
918 Tamper-resistant Exit Pushbutton	•	•	•	-
919 Rotary Release Pushbutton	•	-	-	-
920 Emergency Release Keyswitch/Pushbutton	•	-	-	-
940 Rectangular Push Plate	•	•	•	•
941 Mullion Push Plate	-	•	•	•
946 Square Push Plate	•	•	•	•
946T Square Short-Range Touchless Actuator	•	•	•	-
950 Round Push Plate	•	•	•	•
950T Round Short-Range Touchless Actuator	•	•	•	-
960 Tamper-resistant Keyswitch	•	•	•	-
970 Illuminated Exit Pushbutton	•	•	•	-
972 All-In-One Illuminated Pushbutton	-	•	•	-
975 Illuminated Exit Pushbutton	•	•	•	-
980 Economy Pushbutton	•	•	•	-
990 Oversized Tamper-resistant Handicap/Exit Pushbutton	•	•	•	-
991 Pneumatic Time Delay Handicap/Exit Pushbutton	•	-	-	-

# Locksets

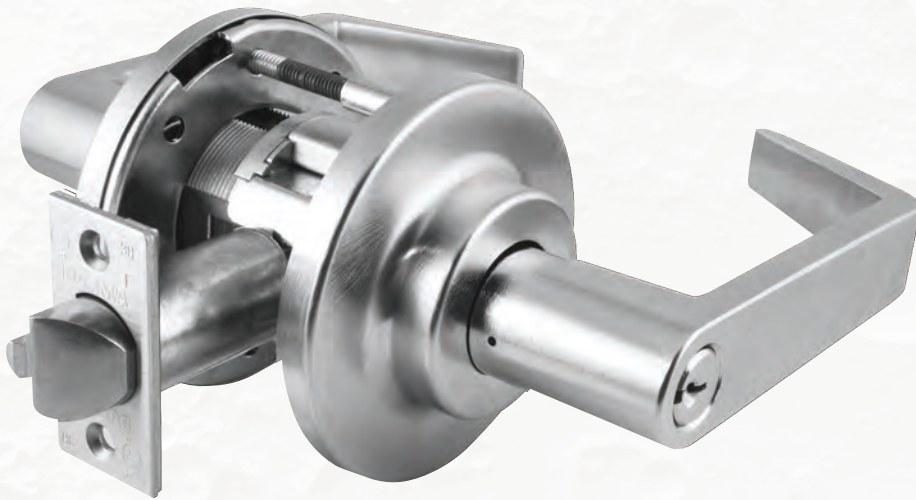

# RCI Locksets

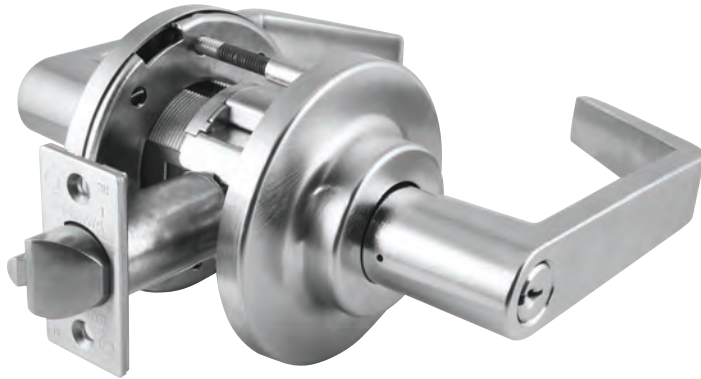

## C800 Series Grade 1 Heavy-Duty Cylindrical Locksets

Provides exceptional security, enhanced aesthetics and rugged dependability.



Energy  
290mA @ 12VDC  
145mA @ 24VDC



Strength  
ANSI/BHMA A156.2



Warranty  
2 Year Limited Warranty



Mode  
Fail-Safe & Fail-Secure  
Options Available



Fire-Rated  
3-Hour Fire-Rated



Door Type  
Designed For Wood  
And Hollow Metal  
Doors

- Easy to install in all swinging doors with ANSI/BHMA Standard A156.115 preparations for cylindrical locks
- Designed for wood and hollow metal doors
- Fail-safe (EL) and fail-secure (EU) options available
- Easily adjustable to accommodate doors from 1-3/4"–2-1/4" thick without spacers (1-3/8"–1-5/8" with spacers PC8DS1). Consult the factory for other thicknesses
- Non-handed for simple installation (excluding LF or LV handed levers)
- Lock is through-bolted for additional strength and security
- Cast stainless steel latch retractor with roller bearings for exceptionally smooth operation and superior strength and durability
- Lock chassis constructed of steel, stainless steel and zinc components for superior strength and corrosion resistance
- Stainless steel latch bolt for superior strength
- Auxiliary deadlocking latch bolt for strength and durability
- Premium PVD (physical vapor deposition) finishes for consistent durable color on 605, 606, 612, 613 and 619
- Available in: 24VDC (145mA) & 12VDC (290mA)
- Request-to-exit signaling switch: 250VAC, 1A, 22AWG wire leads on lever locks
- Certified to ANSI/BHMA standard A156.2, Series 4000 Grade 1
- Tested to 3.5-million cycles by an independent laboratory
- Meets A117.1 accessibility code and ADA requirements for barrier-free accessibility
- UL/cUL – UL 10C Positive Pressure
- All C800 Series locks are Listed 3-hour fire rated
- Locks with 1/2" throw latch bolts are listed for A label and lesser class doors, 4'0" x 8'0" maximum per leaf
- California State Reference Code (formerly title 19, California State Fire Marshal standard), all levers with returns, return to within 1/2" (12 mm) of door face



# RCI Locksets

## How To Order

Function		Cylinder Type <sup>1</sup>		Finish <sup>2</sup>		Latch Bolts <sup>5</sup>		Strike Options		Lip Length		Keying Options <sup>5</sup>		
Fail-Secure	80EU	S	-Sargent 10 Line KIL (less cylinder)	626	-Satin Chrome (Standard)									
		D	-Conventional Cylinder	625	-Bright Chrome									
Fail-Safe		L	-Less Cylinder	619PVD	-Satin Nickel									
		C	-SFIC	613PVD	-Dark Oxidized Satin Bronze									
		J	-Less SFIC	612PVD	-Satin Bronze									
		T	-Temporary SFIC	606PVD	-Satin Brass									
	80EL	R	-Schlage FSIC (less core)	605PVD	-Bright Brass	AM	-Antimicrobial Coating <sup>3</sup>							
	C8											5001	1316	
Request to Exit		RX	LR	C	-3-1/2" Dia.	5	-12VDC	TX	RH	-Right Hand	134	-1-3/4"-2-1/4"		
			LC	D	-3-1/2" Dia. stamped, LOCK	8	-24VDC	-Security Screws	LH	-Left Hand	138	-1-3/8"-1-5/8"		
			LG	E	-3-1/2" Dia. stepped rose	Voltage		Door Hand <sup>6</sup>		Door Thickness <sup>4</sup>				
			LT	F	-3-1/2" Dia. stepped rose stamped, LOCK									
			LF <sup>6</sup>											
			LV <sup>6</sup>											
Lever <sup>5</sup>														
<p><sup>1</sup>Consult factory for other cylinder options.</p> <p><sup>2</sup>For split finishes, consult factory. Specify hand.</p> <p><sup>3</sup>Available on 626 finish only. Consult factory for other finishes.</p> <p><sup>4</sup>Door Thickness Range: 1-3/4"-2-1/4" without spacers, 1-3/8"- 1-5/8" with spacers.</p> <p><sup>5</sup>See next page for options</p> <p><sup>6</sup>Specify handing when ordering LF or LV levers</p> <p><b>NOTE:</b> Consult factory for lead times on other options</p>														

### Standard models include:

- C8 80EL D LR E 626 5 10252 134 5001 1316
- C8 80EL D LR E 626 8 10252 134 5001 1316
- C8 80EL RX D LR E 626 5 10252 134 5001 1316
- C8 80EL RX D LR E 626 8 10252 134 5001 1316
- C8 80EU D LR E 626 5 10252 134 5001 1316
- C8 80EU D LR E 626 8 10252 134 5001 1316
- C8 80EU RX D LR E 626 5 10252 134 5001 1316
- C8 80EU RX D LR E 626 8 10252 134 5001 1316



# RCI Locksets

## Latch Bolts

Latch Throw	Latch Type	Face
3/4" Throw – Latch	18	5 –All Other Functions
1/2" Throw – Latch	10	0 –C810, C840, C844
2-3/8" Backset –	1	0 –1" Face, Square Corner
2-3/4" Backset –	2	1 –1" Face, 1/4" Radius Corner
3-3/4" Backset –	3	2 –1-1/8" Face, Square Corner
5" Backset –	5	

## Keying Options

### Standard Keyways

Keying
OBIT –O-Bitted
CMK –Construction Master Keyed
MKD –Master Keyed
NSK –Non-Stock Keyed
KA4 –Keyed Alike, Sets of 4
KA2 –Keyed Alike, Sets of 2
KD –Keyed Different
SC –Schlage C
SE –Schlage E
D100 –DORMA SKC
CA –Corbin 60
CD –Corbin 59A1
CE –CorbinRusswin L4
RA –Russwin 981
RB –Russwin D1
GA –Sargent LA
SF –Schlage F
WA –Weiser E
YA –Yale 8
YG –Yale GA







Retrofit Keyways Available  
O-Bitted Only

### IC Keyways

Keying
TMP –Temporary Construction Core
MKD –Combinated (Master Keyed)
BA –Best A
BB –Best B
BC –Best C
BD –Best D
BE –Best E
BF –Best F
BG –Best G
BH –Best H
BJ –Best J
BK –Best K
BL –Best L
BM –Best M
BQ –Best Q
D100 –DORMA SKC (7-pin Core Only)
BLK –Black Construction Core
BLU –Blue Construction Core
GRN –Green Construction Core

Specify color if required to match existing project

## Lever Designs

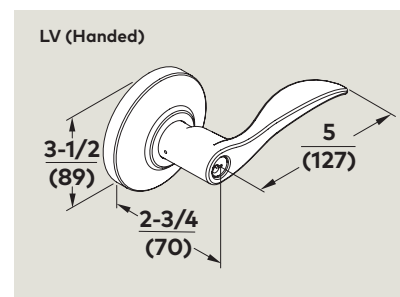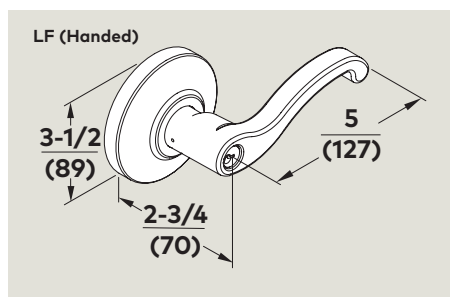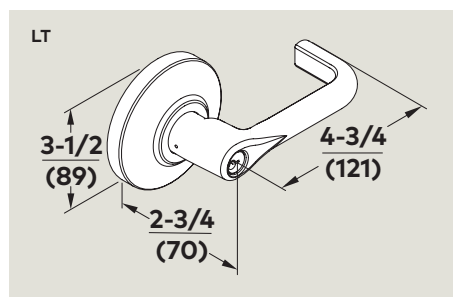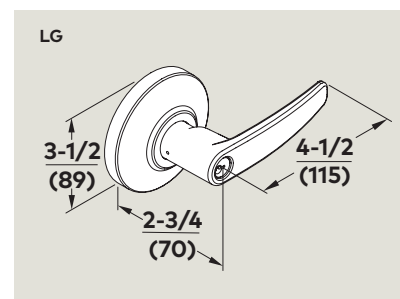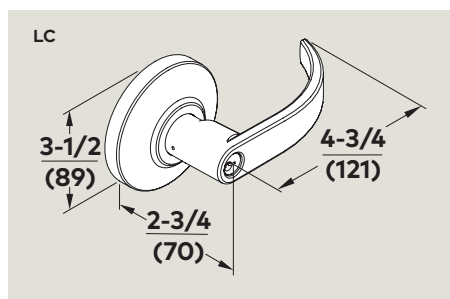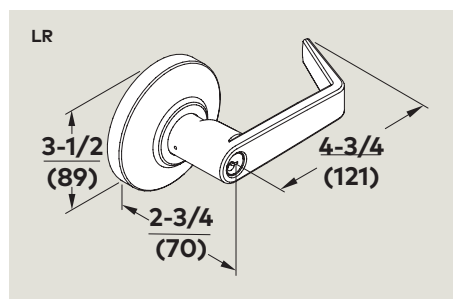

# Specialty Locks



# RCI Specialty Locks



## YG80 Electronic heavy-duty door lock

High-strength lock designed for securing gates, roll-up doors, shipping containers, and other large doors or entryways. Offers the ability to integrate into an access control system. Fully monitored, weatherproof, and user configurable, the YG80 is the perfect indoor and outdoor locking solution.



Energy  
12/24VDC +/- 15%



Strength  
11,240lbs  
Dynamic 148 ft-lbs



Warranty  
5 Year Limited  
Warranty



Mode  
Fail-Secure



Endurance  
300,000 Cycles

- Low current consumption
- With the heater disabled, the YG80 will draw as little as 50 mA in standby, and only 1,000 mA in operation at 12VDC. (Heater @24VDC only)
- 18 mm diameter stainless steel bolt pin and reinforced strike design
- Holding force of 11,240 lbs

### Features

- Concealed mounting bolts under the lock's cover, which cannot be removed without triggering the tamper detection monitor
- Completely weatherproof
- Aluminum lock body for excellent corrosion resistance
- Built-in heater for continued functionality in colder climates, the YG80 can handle any environment it is placed in
- Complete monitoring capabilities
- Provides a range of output signals - bolt locked and unlocked position, door position, and tamper detection
- Integrated access control system capabilities
- Selectable fail safe / fail secure modes, three user selectable control methods, and multiple attempts to lock or unlock, ensures that the YG80 is ready for a wide range of application requirements
- A symmetrical design means the YG80 can be installed both horizontally and vertically, in indoor and outdoor environments
- The included three meter flying cable ensures easy connection for all the monitoring, control and the 12-24VDC power supply

# RCI Specialty Locks



## 3590 Lock 'N' Prox

Battery powered lock with built-in proximity reader – ideal standalone solution.

2-3/8" W x 2-3/8" H x 7/8" D (60mm x 60mm x 22mm)

Dimensions of lock only. Excludes pin.



Energy  
Battery Powered



Strength  
140lbf<sup>1</sup> Holding Force



Warranty  
2 Year Limited  
Warranty



Mode  
Fail-Secure  
(Fail-Safe When  
Battery Fails)



Alarm  
Optional Alarm  
Function Available

<sup>1</sup>For base model. 450lbf for 3590A


- Easy to install and simple to program without PC or software
- Can be fitted to sliding doors, drawer backs, leaf doors, glass, etc.
- 2 pin configurations to accommodate most mounting applications
- Up to 1" (25mm) of reliable reading through wood material without external antenna
- 50 users per lock capability
- Flexible, project-based programming and functions available
- Long lasting lithium battery – minimum 30,000 latch openings per life of battery
- Low battery audible warning
- Very robust, impact-proof motor operation
- Audible signal upon card/fob presentation
- Various catch options available including spring open door release
- Black finish
- FCC and ISSED compliant

### Options

#### A – Alarm Function

Preprogrammed alarm function to detect if the door is left ajar or forced open. When the door is left ajar for more than 30 seconds the alarm will beep until the door is closed or a valid user card is presented. If the door is forced open, the sounder will sound at full volume immediately. To silence the alarm a valid user card must be presented to the lock.

### How To Order

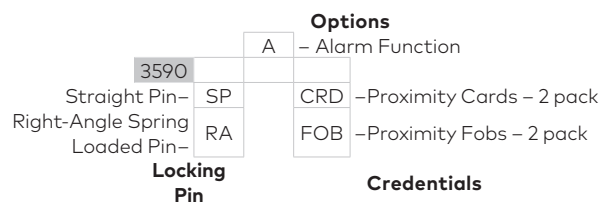

Example: **3590SPAFOB**

### Accessories

Model	Description
3590LP-ALM	Straight locking pin
3590LP-ZALSP	Right angle locking pin
3590PX-CRD10	Proximity cards – 10 pack
3590PX-FOB10	Proximity fobs – 10 pack
3590PX-PRO	Replacement programming card
3590ER-SLOC	External reader – surface-mounted with 5ft (1.5m) cable for use when lock is not within read range
3590ER-RLOC	External reader – recess mounted with 5ft (1.5m) cable for use when lock is not within read range Reader diameter is 1/2" (12mm) and length is 1-9/16" (40mm)






# RCI Specialty Locks



## 3510LM Electromechanical Cabinet Lock

Compact, surface-mounted design ideal for small enclosures.  
1-5/8" W x 1-7/8" H x 13/16" D (42mm x 48mm x 20mm)

Dimensions of lock only. Excludes pin.

	Energy 250mA <sup>1</sup> Field-Selectable 12VAC/VDC, 24VAC/ VDC		Strength 250lbf Holding Force
	Warranty 3 Year Limited Warranty		Mode Field-Selectable Fail-Safe & Fail-Secure
	Monitoring Built-in Monitoring Switch		

<sup>1</sup>Max at 12VAC/VDC, 120mA at 24VAC/VDC

- Surface-mounted compact electric lock
- Versatile mounting positions
- Elongated holes for adjustable mounting
- Zinc-plated (rust-resistant) steel locking pin assembly
- Low energy consumption
- Positioning of the locking pin determines lock mode
- Built-in monitoring switch indicates whether the mechanism is locked or unlocked
- Black finish

### How To Order

3510 LM



## 3513 Electromechanical Cabinet Lock




Compact, surface-mounted design ideal for small enclosures.  
1-3/16" W x 2-7/8" H x 1-1/8" D (30mm x 73mm x 29mm)

Dimensions of lock only. Excludes pin.

## 3513DM Electromechanical Cabinet Lock with Monitoring

Compact, surface-mounted design ideal for small enclosures.  
1-3/16" W x 2-7/8" H x 1-1/8" D (30mm x 73mm x 29mm)

Dimensions of lock only. Excludes pin.

	Energy 200mA <sup>1</sup> Field-Selectable 12/24VDC		Strength 440lbf Holding Force
	Warranty 3 Year Limited Warranty		Mode Field-Selectable Fail-Safe & Fail-Secure
	Monitoring Optional Dual Monitoring Model Available		

<sup>1</sup>Max at 12VDC, 100mA at 24VDC

- Surface-mounted compact electric lock
- Superior heavy-duty metal construction
- Versatile side or top mounting
- Low energy consumption
- Positioning of the solenoid determines lock mode
- Black finish

### Options

#### DM – Dual Monitoring

Built-in locking pin and door monitoring switches.

### How To Order

3513 ☐ DM –Dual Monitoring  
Options



# RCI Specialty Locks



## 3525 Electromechanical Rack Handle Lock

Provides intelligent electronic locking and monitoring capabilities.  
1-1/2" W x 6-3/4" H x 1" D (37mm x 170mm x 24.5mm)

## 3525PRX Electromechanical Rack Handle Lock with Proximity Reader

Includes built-in 125kHz HID® proximity reader.  
1-1/2" W x 8-1/4" H x 1" D (37mm x 210mm x 24.5mm)



Energy  
200mA<sup>1</sup>  
Field-Selectable 12-  
24VDC



Monitoring  
Lock & Handle  
Status



Warranty  
1 Year Limited  
Warranty



Mode  
Fail-Secure  
(Fail-Safe When  
Battery Fails)

<sup>1</sup>Typical: less than 200mA at 12VDC, max/stall: 1A, standby: 50mA max,  
output signal: 100mA max load, card reader module: 60mA max

### Accessories

Model	Description
<b>Cams</b>	
3525-GR3815	0.61" (15.5mm) grip cam, 1-1/2" (38mm) length
3525-GR3817	0.69" (17.5mm) grip cam, 1-1/2" (38mm) length
3525-GR3819	0.77" (19.5mm) grip cam, 1-1/2" (38mm) length
3525-GR3821	0.85" (21.5mm) grip cam, 1-1/2" (38mm) length
3525-GR3823	0.93" (23.5mm) grip cam, 1-1/2" (38mm) length
3525-GR4522	0.77" (19.5mm) grip cam, 1-3/4" (45mm) length
3525-GR4524	0.85" (21.5mm) grip cam, 1-3/4" (45mm) length
3525-GR4526	0.93" (23.5mm) grip cam, 1-3/4" (45mm) length
<b>Gearbox For Multi-Point Systems</b>	
3525-MPLH	Left Hand Gearbox (CCW to open)
3525-MPRH	Right Hand Gearbox (CW to open)
<b>Credentials</b>	
1326R-H-10	125kHz Clamshell Proximity Card, HID® protocol, 10 pack
1326R-H-25	125kHz Clamshell Proximity Card, HID® protocol, 25 pack
1326R-H-50	125kHz Clamshell Proximity Card, HID® protocol, 50 pack
1386R-H-10	125kHz Printable Proximity Card, HID® protocol, 10 pack
1386R-H-25	125kHz Printable Proximity Card, HID® protocol, 25 pack
1386R-H-50	125kHz Printable Proximity Card, HID® protocol, 50 pack
1314R-H-10	125kHz Thick Printable Proximity Card, HID® protocol, 10 pack
1314R-H-25	125kHz Thick Printable Proximity Card, HID® protocol, 25 pack
1314R-H-50	125kHz Thick Printable Proximity Card, HID® protocol, 50 pack
1346R-H-10	125kHz Proximity Fob, HID® protocol, 10 pack
1346R-H-25	125kHz Proximity Fob, HID® protocol, 25 pack
1346R-H-50	125kHz Proximity Fob, HID® protocol, 50 pack

HID® is a registered trademark of HID Global Corporation, an ASSA ABLOY company. All other trademarks are the property of their respective owners. RCI reserves the right to change specifications without notice.

**NOTE:** The lock sensor is an optical device that senses the presence of the locking cam. Keyed cylinder can affect sensing. Removal of factory installed keyed cylinder will void warranty.

- Easy to install and use
- Local monitoring with multi-color LED indicator
- Remote lock and unlock control
- Single or multi-point locking
- Low current, gear motor driven mechanism
- Momentary or continuous lock actuation
- High security DIN lock for mechanical key override
- Non-handed
- Wire harness and hardware kit included
- Includes three keys (keyed alike)
- Activated via any third party control system (Access Control)
- PoE adaptable
- Housing, handle and mounting bracket are made of black, glass-filled nylon
- Shaft and rotation limiter are made of die-cast zinc with a bright sealer finishing

### Options

#### iCLASS 13.56 MHz RFID

reader now available (\*\*special order\*\*) Call for order details.

#### PRX – Proximity Reader

Integrated 125kHz HID® proximity reader which recognizes existing employee RFID prox cards. Wiegand output can be connected to a standalone controller or an existing networked access control system for remote control, monitoring and reporting.

### How To Order

3525

PRX – Proximity Reader  
Options



# RCI Specialty Locks







## MEM4400 Compact Electromechanical Lock

Ideal for sliding doors or small enclosures.

1-3/4"W x 1-3/16"H x 21/32"D (44mm x 30mm x 16.5mm)

Armature Plate: 1-3/4"W x 1-3/16"H x 1/2"D (44mm x 30mm x 12.5mm)

	Energy 260mA 12/24VDC		Strength 880lbf Holding Force
	Warranty 3 Year Limited Warranty		Mode Fail-Safe
	Monitor Lock & Door Status Sensors		

- Ultra-compact design
- Low power consumption
- Easy installation
- Early warning alarm
- No residual magnetism
- For automatic sliding doors (lock located on or within door track)

### How To Order

MEM4400







## S2500A Mini Electromagnetic Lock

For small enclosures or hutches.

4-1/4"W x 1-1/2"H x 3/4"D (107mm x 37mm x 20mm)

Armature Plate: 2-1/2"W x 1-1/4"H x 11/32"D (44mm x 30mm x 9mm)

	Energy 240mA 12VDC		Strength 165lbf Holding Force
	Warranty 3 Year Limited Warranty		Mode Fail-Safe

- Mini magnetic lock single door
- Surface-mounted magnet
- Non-monitored
- Power off to release door
- Brushed anodized aluminum housing
- Zinc plated electromagnetic body
- Grain orientated silicone steel armature plate

### How To Order

S2500A

# RCI Specialty Locks



## EM-MAG1500 Compact Electromechanical Lock

For outswinging doors & small enclosures.

6-7/32" W x 1-7/16" H x 1-3/8" D (158mm x 36mm x 35mm)

Armature Plate: 4-3/4" W x 1-3/16" H x 1/2" D (121mm x 30mm x 12.5mm)



Energy  
240mA<sup>1</sup>  
Field-Selectable  
12/24VDC



Strength  
1,500lbf  
Holding Force



Warranty  
3 Year Limited Warranty



Mode  
Fail-Safe



Monitor  
Lock & Door  
Status Sensors

<sup>1</sup>At 12VDC, 120mA at 24VDC

- Slim design; significantly smaller than standard electromagnetic locks
- Bi-color light panel indicates lock status
- Releases under side load of up to 130lbs (60kg)
- Early warning alarm
- Includes anti-tamper security plate
- Anodized aluminum housing; zinc plated for anti-corrosion
- No residual magnetism
- Low energy consumption
- Factory tested to over 1-million cycles

### How To Order

EM-MAG1500



## MEM2400 Compact Electromechanical Lock

For inswing doors & small enclosures.

8-5/8" W x 1-7/16" H x 1-3/8" D (218mm x 36mm x 35mm)

Armature Plate: 7-1/8" W x 1-3/16" H x 1/2" D  
(181mm x 30mm x 12.5mm)



Energy  
350mA<sup>1</sup>  
Field-Selectable  
12/24VDC



Strength  
1,500lbf  
Holding Force



Warranty  
3 Year Limited Warranty



Mode  
Fail-Safe



Monitor  
Lock & Door  
Status Sensors

<sup>1</sup>At 12VDC, 120mA at 24VDC

- Patented electromagnetic lock with early warning detectors
- Bi-color LED light indicates lock status
- Compact surface-mount design
- Includes adjustable L & Z bracket
- Capable of releasing under door back pressure (pre-load) of up to 150lbs (70kg)
- Aluminum extrusion casing and anodized coated, high grade zinc plating on magnet and plate
- No residual magnetism
- Low energy consumption

### How To Order

MEM2400



L and/or Z bracket

# Exit Devices



# RCI Exit Devices



## 120 Series Exit Bar

Non-latching exit bar.  
2-1/2"H x 3-5/8"D (63.5mm x 92mm)



Warranty  
3 Year Limited Warranty

- Ideal for easy egress to release electromagnetic lock
- 3A @ 30VDC (Inductive), 4A @ 30VDC (Resistive)
- Available in SPDT and 2SPDT
- Two standard bar lengths are offered – can be field cut for custom lengths

Model	Description	For Door Widths	Finish
120A-SS1	Non-latching exit bar with SPDT switch	24–36" (610–914mm)	28/40
L120A-SS1	Non-latching exit bar with SPDT switch	37–48" (940–1219mm)	28/40
120A-SS2	Non-latching exit bar with 2SPDT switch	24–36" (610–914mm)	28/40
L120A-SS2	Non-latching exit bar with 2SPDT switch	37–48" (940–1219mm)	28/40
120D-SS1	Non-latching exit bar with SPDT switch and camlock dogging	24–36" (610–914mm)	28/40
L120D-SS1	Non-latching exit bar with SPDT switch and camlock dogging	37–48" (940–1219mm)	28/40
120D-SS2	Non-latching exit bar with 2SPDT switch and camlock dogging	24–36" (610–914mm)	28/40
L120D-SS2	Non-latching exit bar with 2SPDT switch and camlock dogging	37–48" (940–1219mm)	28/40

# RCI Exit Devices



## 1200 Series Mechanical Rim Exit Bar

Interlocking latch design.

2-1/2"H x 3-5/8"D (63.5mm x 92mm)



Warranty  
3 Year Limited Warranty

- Weather resistant for outdoor use
- All devices re-latch
- Camlock and cylinder dogging available (for non-fire labeled doors)
- Choice of 3 alarm modules
- Two standard bar lengths are offered – can be field cut for custom lengths
- Non-handed
- High security, exceeding a 1" dead bolt
- Made in the USA
- UL certified ANSI/BHMA A156.3-2008, Grade 1
- UL Listed Fire Exit Hardware, 3 hour fire-rating

- UL Listed Panic Hardware
- Conforms to Positive Pressure Standards UL 10C & UBC 7-2
- Accepted by NYC MEA 337-92M



### Options

- SS1A-10/20/30\* – Signal Switch for models with alarm modules (SPDT)
- SS2A-20/30\* – Signal Switch for models with alarm modules (2SPDT)
- LMS – Lock Monitor Switch. Rated 5A, 250V DC

### How To Order

Model	Description	For Door Widths	Finish
1200A	Mechanical rim exit bar, no dogging	24–36" (610–914mm)	28/40
L1200A	Mechanical rim exit bar, no dogging	37–48" (940–1219mm)	28/40
1200C*	Mechanical rim exit bar cylindrical dogging exit device	24–36" (610–914mm)	28/40
L1200C*	Mechanical rim exit bar cylindrical dogging exit device	37–48" (940–1219mm)	28/40
1200D	Mechanical rim exit bar cam dogging exit device	24–36" (610–914mm)	28/40
L1200D	Mechanical rim exit bar cam dogging exit device	37–48" (940–1219mm)	28/40
1200F	Mechanical rim exit bar fire exit device	24–36" (610–914mm)	28/40
L1200F	Mechanical rim exit bar fire exit device	37–48" (940–1219mm)	28/40
1210A	Mechanical rim exit bar no dogging, alarm module (9V battery)	32–36" (813–914mm)	28/40
L1210A	Mechanical rim exit bar no dogging, alarm module (9V battery)	37–48" (940–1219mm)	28/40
1210D	Mechanical rim exit bar, camlock dogging, alarm module (9V battery)	32–36" (813–914mm)	28/40
L1210D	Mechanical rim exit bar, camlock dogging, alarm module (9V battery)	37–48" (940–1219mm)	28/40
1210F	Mechanical rim exit bar, fire doors, alarm module (9V battery)	32–36" (813–914mm)	28/40
L1210F	Mechanical rim exit bar, fire doors, alarm module (9V battery)	37–48" (940–1219mm)	28/40
1220A	Mechanical rim exit bar, alarm module (12-24VDC remote, 9V battery backup)	32–36" (813–914mm)	28/40
L1220A	Mechanical rim exit bar, alarm module (12-24VDC remote, 9V battery backup)	37–48" (940–1219mm)	28/40
1220D	Mechanical rim exit bar, camlock dogging, alarm module (12-24VDC remote, 9V battery backup)	32–36" (813–914mm)	28/40
L1220D	Mechanical rim exit bar, camlock dogging, alarm module (12-24VDC remote, 9V battery backup)	37–48" (940–1219mm)	28/40
1220F	Mechanical rim exit bar for fire doors, alarm module (12-24VDC remote, 9V battery backup)	32–36" (813–914mm)	28/40
L1220F	Mechanical rim exit bar for fire doors, alarm module (12-24VDC remote, 9V battery backup)	37–48" (940–1219mm)	28/40
1230A	Mechanical rim exit bar, with alarm module (12-24VDC remote)	32–36" (813–914mm)	28/40
L1230A	Mechanical rim exit bar, with alarm module (12-24VDC remote)	37–48" (940–1219mm)	28/40
1230D	Mechanical rim exit bar, camlock dogging, alarm module (12-24VDC remote)	32–36" (813–914mm)	28/40
L1230D	Mechanical rim exit bar, camlock dogging, alarm module (12-24VDC remote)	37–48" (940–1219mm)	28/40
1230F	Mechanical rim exit bar for fire doors, alarm module (12-24VDC remote)	32–36" (813–914mm)	28/40
L1230F	Mechanical rim exit bar for fire doors, alarm module (12-24VDC remote)	37–48" (940–1219mm)	28/40

### Accessories

Model	Description
DDS	Double door strike, black oxide finish
SS1	Signal switch SPDT
SS2	Signal switch 2SPDT
SS1W	Signal switch SPDT weather-proof with mounting hardware

**NOTES:** Models with A,C or D Suffix: cULus Listed Panic Hardware, ANSI/BHMA A156.3-2001, Grade 1 Models with F Suffix: cULus Fire Exit Hardware rated 3-hours, ANSI/BHMA A156.3, Grade 1 Conforms to ANSI/UL10C and UBC 7-2 (1997)  
Alarm cylinder not included.

# RCI Exit Devices



## 1300 Series Electrified Rim Exit Bar

Interlocking latch design.  
2-1/2"H x 3-5/8"D (63.5mm x 92mm)



Warranty  
3 Year Limited Warranty

- Continuous-duty solenoid provides a remote unlock feature for controlled entry
- Field-selectable 12/24 VDC (800mA @ 12VDC, 400mA @ 24VDC)
- Weather resistant for outdoor use
- All devices re-latch
- Camlock and cylinder dogging available (for non-fire labeled doors)
- Choice of 3 alarm modules
- Two standard bar lengths are offered – can be field cut for custom lengths
- Non-handed
- High security, exceeding a 1" dead bolt
- Made in the USA
- UL certified ANSI/BHMA A156.3-2008, Grade 1
- UL Listed Fire Exit Hardware, 3 hour fire-rating
- UL Listed Panic Hardware
- Conforms to Positive Pressure Standards UL 10C & UBC 7-2
- Accepted by NYC MEA 337-92M



### Options

- SS1A-10/20/30\* – Signal Switch for models with alarm modules (SPDT)
- SS2A-20/30\* – Signal Switch for models with alarm modules (2SPDT)
- LMS – Lock Monitor Switch. Rated 5A, 250V DC

### How To Order

Model	Description	For Door Widths	Finish
1300A	Electrified rim exit bar, no dogging	24–36" (610–914mm)	28/40
L1300A	Electrified rim exit bar, no dogging	37–48" (940–1219mm)	28/40
1300C*	Electrified rim exit bar, cylindrical dogging	24–36" (610–914mm)	28/40
L1300C*	Electrified rim exit bar, cylindrical dogging	37–48" (940–1219mm)	28/40
1300D	Electrified rim exit bar, camlock dogging	24–36" (610–914mm)	28/40
L1300D	Electrified rim exit bar, camlock dogging	37–48" (940–1219mm)	28/40
1300F	Electrified rim exit bar for fire doors	24–36" (610–914mm)	28/40
L1300F	Electrified rim exit bar for fire doors	37–48" (940–1219mm)	28/40
1310A	Electrified rim exit bar, no dogging, alarm module (9V battery)	32–36" (813–914mm)	28/40
L1310A	Electrified rim exit bar, no dogging, alarm module (9V battery)	37–48" (940–1219mm)	28/40
1310D	Electrified rim exit bar, camlock dogging, alarm module (9V battery)	32–36" (813–914mm)	28/40
L1310D	Electrified rim exit bar, camlock dogging, alarm module (9V battery)	37–48" (940–1219mm)	28/40
1310F	Electrified rim exit bar for fire doors, alarm module (9V battery)	32–36" (813–914mm)	28/40
L1310F	Electrified rim exit bar for fire doors, alarm module (9V battery)	37–48" (940–1219mm)	28/40
1320A	Electrified rim exit bar, alarm module (12-24VDC remote, 9V battery backup)	32–36" (813–914mm)	28/40
L1320A	Electrified rim exit bar, alarm module (12-24VDC remote, 9V battery backup)	37–48" (940–1219mm)	28/40
1320D	Electrified rim exit bar, camlock dogging, alarm module (12-24VDC remote, 9V battery backup)	32–36" (813–914mm)	28/40
L1320D	Electrified rim exit bar, camlock dogging, alarm module (12-24VDC remote, 9V battery backup)	37–48" (940–1219mm)	28/40
1320F	Electrified rim exit bar, fire doors, alarm module (12-24VDC remote, 9V battery backup)	32–36" (813–914mm)	28/40
L1320F	Electrified rim exit bar, fire doors, alarm module (12-24VDC remote, 9V battery backup)	37–48" (940–1219mm)	28/40
1330A	Electrified rim exit bar, with alarm module (12-24VDC remote)	32–36" (813–914mm)	28/40
L1330A	Electrified rim exit bar, with alarm module (12-24VDC remote)	37–48" (940–1219mm)	28/40
1330D	Electrified rim exit bar, camlock dogging (12-24VDC remote)	32–36" (813–914mm)	28/40
L1330D	Electrified rim exit bar, camlock dogging (12-24VDC remote)	37–48" (940–1219mm)	28/40
1330F	Electrified rim exit bar for fire doors, alarm module (12-24VDC remote)	32–36" (813–914mm)	28/40
L1330F	Electrified rim exit bar for fire doors, alarm module (12-24VDC remote)	37–48" (940–1219mm)	28/40

### Accessories

Model	Description
DDS	Double door strike, black oxide finish
SS1	Signal switch SPDT
SS2	Signal switch 2SPDT
SS1W	Signal switch SPDT weather-proof with mounting hardware

**NOTES:** Models with A,C or D Suffix: cULus Listed Panic Hardware, ANSI/BHMA A156.3-2001, Grade 1 Models with F Suffix: cULus Fire Exit Hardware rated 3-hours, ANSI/BHMA A156.3, Grade 1 Conforms to ANSI/UL10C and UBC 7-2 (1997) Alarm cylinder not included.



# RCI Exit Devices



## Exterior Trims

For 1200/1300 rim exit devices.


- Electrified option available
- UL certified ANSI/BHMA 156.3, Grade 1
- UL certified for fire doors

### How To Order

Model	Description	Finish
01-LTD	Exit only	28/40
02P-LTD	Escutcheon with pull – thru-bolt mounted 1-15/16" W	28/40
03C-LTD	Escutcheon only – cutout for cylinder 1-7/8" W, thru-bolt mounted	28/40
03P-LTD	Escutcheon with pull – cutout for cylinder 1-15/16" W, thru-bolt mounted	28/40
08-L	Lever – field selectable handing LH/RH, cutout for cylinder, thru-bolt mounted 1-13/16" W, Std. LHR, field reversible to RHR	28/40
08N-L	Lever narrow – cutout for cylinder, for 2-1/8" stile, thru-bolt mounted 1-13/16" W, specify handing	28/40
08-EL	Electrified lever – field selectable handing LH/RH, cutout for cylinder, thru-bolt mounted 1-13/16" W, Std. LHR, field reversible to RHR, 24VDC standard (12VDC optional)	28/40
08N-EL	Electrified lever narrow – cutout for cylinder, for 2-1/8" stile, thru-bolt mounted 1-13/16" W, specify handing, 24VDC standard (12VDC optional)	28/40

**NOTE:** Cylinders not supplied with trim.

# Power Supplies

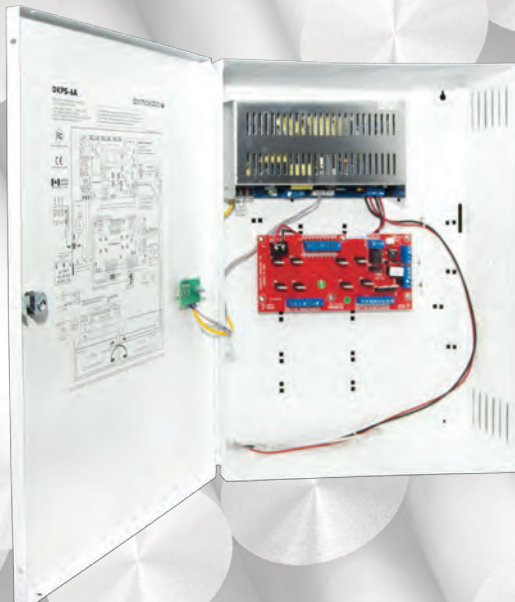

# RCI Power Supplies



## DKPS-2A Power Supply

13- 5/16" x 17- 5/8" x 4- 5/16" (338mm x 448mm x 110mm)



Energy  
Field-Selectable  
2A at 12 or 24VDC



Warranty  
Lifetime Limited  
Warranty

- Input = 100-240VAC, 50-60Hz. 2.4A Max. draw
- Output 2 Amps continuous supply current at Nominal 12/24 VDC
- 4 outputs each, with electronic over-current protection set at 2 Amp
- Built-in dedicated charger for sealed lead acid or gel cell type batteries
- Battery load and charge test every 48hr
- Battery Reversal protection
- Low Battery indication at 11.40/22.80 Volts
- Low Battery disconnect at 10.10/20.30 Volts
- Automatic switch over to stand-by battery upon AC Failure
- Common "Batt.Fault" CMOS relay and indicator for all battery and charger fault. 30VDC @ 60mA
- CMOS relay output and indicator for AC failure within 60 seconds. 30VDC @ 60mA
- LEDs display on enclosure door (Green, Yellow, Blue)
- Common "Out Fault" CMOS relay for DC failure on any of the 4 outputs. 30VDC @ 60mA
- Battery charging leads included
- FPDB (Fire Panel Disconnect Board) standard
- Tamper switch available (optional, but required when installation must meet UL294 Edition 6 or higher)



## DKPS-4A Power Supply

12-1/2"W x 12-1/2"H x 4"D (318mm x 318mm x 102mm)



Energy  
Field-Selectable  
4A at 12 or 24VDC



Warranty  
Lifetime Limited  
Warranty

- Input = 100-240VAC, 50-60Hz. 1.8A Max. draw, fuse at 4 Amp
- Output 4 Amps continuous supply current Power Factor 0.6 at Nominal 12/24 VDC
- 8 outputs rated at 2.0 amps Max
- Built-in dedicated charger for sealed lead acid or gel cell type batteries
- Battery load and charge test every 48hr
- Battery Reversal protection
- Low Battery indication at 11.40/22.80 Volts
- Low Battery disconnect at 10/20.2 Volts
- Automatic switch over to stand-by battery upon AC Failure
- Common "Batt.Fault" CMOS relay and indicator for all battery and charger fault. 30VDC @ 60mA
- CMOS relay output and indicator for AC failure within 60 seconds. 30VDC @ 60mA
- LEDs display on enclosure door (Green, Yellow, Blue)
- Battery charging leads included
- FPDB (Fire Panel Disconnect Board) standard
- Tamper switch available (optional, but required when installation must meet UL294 Edition 6 or higher)



# RCI Power Supplies



## DKPS-6A Power Supply

13- 5/16" x 17- 5/8" x 4- 5/16" (338mm x 448mm x 110mm)




Energy  
Field-Selectable  
6A at 12 or 24VDC



Warranty  
Lifetime Limited  
Warranty

- Input = 100-240VAC, 50-60Hz. 2.5A Max. draw, fuse at 6 Amp
- Output 6 Amps continuous supply current Power Factor 0.6 at Nominal 12/24 VDC
- 8 outputs rated at 2.0 amps Max
- Built-in dedicated charger for sealed lead acid or gel cell type batteries
- Battery load and charge test every 48hr
- Battery Reversal protection
- Low Battery indication at 11.40/22.80 Volts
- Low Battery disconnect at 10/20.2 Volts
- Automatic switch over to stand-by battery upon AC Failure
- Common "Batt.Fault" CMOS relay and indicator for all battery and charger fault. 30VDC @ 60mA
- CMOS relay output and indicator for AC failure within 60 seconds. 30VDC @ 60mA
- LEDs display on enclosure door (Green, Yellow, Blue)
- Battery charging leads included
- FPDB (Fire Panel Disconnect Board) standard
- Tamper switch available (optional, but required when installation must meet UL294 Edition 6 or higher)

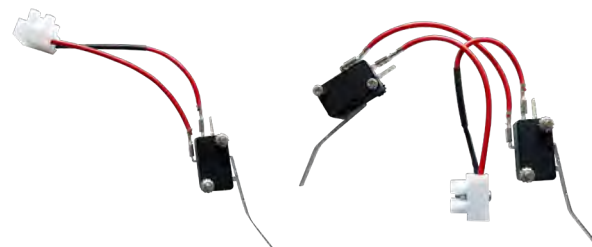

## DKPS-TSW Tamper Switches

The tamper switch is a device that is designed to connect to the DKPS Power Supply. When installed, it signals a warning to authorized personnel if the metal enclosure has been removed from the wall and/or the door is not fully closed or secured.

DKPS-TSW1-02

Tamper switch for DKPS power supply enclosure door

DKPS-TWS2-02

Tamper switch for DKPS power supplies (enclosure door & installation)

Tamper switch is recommended but is required when the entire access control installation must meet UL294 Edition 6 or higher.

# RCI Power Supplies Accessories



## WPDT Wireless Power & Data Transfer

Transfers low voltage power and data signals without the use of hard wires.



Energy  
12VDC/24VDC  
field selectable



Energy  
Output amperage  
600mA/12VDC  
300mA/24VDC



Energy  
Maximum input power  
600mA @ 24VDC



Warranty  
5 Year Limited  
Warranty

The RCI wireless power and data transfer (WPDT) is an innovative and less intrusive way of wirelessly transferring low voltage power and data signals between a door and frame.

### Features

- Ideal for situations where power cannot be routed to an electric lock in the door.
- Enables less wire runs to various points of the door.
- Eliminates a power transfer hinge or other method of power transfer.
- Two-piece device has an RF receiver and transmitter - transmitter resides on the frame side while the receiver resides in the door.
- For fail secure devices only.
- Power is delivered to the transmitter that transfers power/data wirelessly to the receiver.
- Ability to monitor RX, LBM, DBM (max 2 signals)
- Status indicators (frame & door side).
- Monitoring function(s) report change of state of the lock switches back to a control panel.



## 9310RB Relay Board

Versatile and reliable board with input-output terminals designed to control low voltage supply.

2" x 1 9/16" x 3/4" (50 x 40 x 19mm)



Warranty  
2 Year Limited Warranty

### Features

- 12/24 Selectable
- Large screw terminals for ease of wire connection
- LED indicators
- SPDT output
- 10A Rated



## RB-DPDT8A Relay Board

Versatile and reliable board with input-output terminals designed to control low voltage supply.

2 1/2" x 2" x 3/4" (62 x 54 x 19mm)



Warranty  
2 Year Limited Warranty

### Features

- 12/24 Selectable
- Large screw terminals for ease of wire connection
- LED indicators
- DPDT output
- 8A Rated



# RCI Power Supplies Accessories




## TD365 Day Timer

3-3/4"W x 4-11/16"H x 1"D  
(95mm x 120mm x 25mm)

**2**  
Year

Warranty  
2 Year Limited Warranty

- 24 hour, 365 day timer for individual daily events
- 2 momentary or latching SPDT relays to control locks and other electronically controlled devices or
- 40 holidays and 99 user events
- Large alpha-numeric backlit LCD display for easy programming
- Lithium battery included
- "First Person In" feature to prevent unattended open doors
- High current capabilities
- EEPROM memory for safe storage of data (in the event of a power failure)
- Ideal for openings requiring scheduled access



## PDM-4 Distribution Board

2-1/4"W x 3-3/4"H (56.5mm x 95.25mm)

## PDM-8 Distribution Board

3-3/4"W x 4-3/4"H (95.5mm x 122mm)

## PDM-8S Distribution Board

3-3/4"W x 4-3/4"H (95.5mm x 122mm)

**2**  
Year

Warranty  
2 Year Limited Warranty

When installed into a power supply, servicing time can be greatly reduced by the output indicator LED's. If an output fuse is blown the accompanying LED will be off, simply identifying the device connected to this output. This will allow potential problems to be resolved quickly. In addition to short circuit protection, the input terminals also have a surge protector that can absorb a 1,500W spike or surge to protect connected devices.

- PDM-4 distributes a DC source into 4 outputs
- PDM-8 distributes a DC source into 8 outputs
- PDM-8S distributes up to 3 DC sources into 8 outputs
- The output voltage and total current available is determined by the input supply
- Separate red power indicator LED for each output
- UL 294 Listed for access control system unit
- CAN/ULC S319 Listed for access control system unit for Canada
- PDM-8S output is jumper selectable from 3 separate inputs



# RCI Power Supplies Accessories



NOTE: T1002 shown



NOTE: T1002 shown

## AC Plug-In Transformers

2-1/4"W x 3-3/16"H x 2"D (57mm x 81mm x 51mm)



Warranty  
2 Year Limited Warranty

- Plug into a standard 115VAC outlet to provide low voltage AC output
- Thermally protected to prevent overload due to short

Model	Description	Output Voltage / Power
T1002	Plug-In Transformer CSA to UL 1310	2VAC-20VA
T1004	Plug-In Transformer CSA to UL 1310	16VAC-40VA
T1008	Plug-In Transformer CSA to UL 1310	24VAC-20VA



## DC Plug-In Power Supply

1-5/8"W x 3"H x 1-3/8"D (41mm x 76mm x 35mm)



Warranty  
2 Year Limited Warranty

- Plugs into a standard 115VAC outlet and provides a 12VDC output
- 6' Wire leads (1.8m)

Model	Description	Output Voltage / Power
T1003	Plug-In/UL Power Supply	12VDC-1.5A

## AC Wire-In Transformers

T1001: 2-1/4"W x 2"H x 2"D (57mm x 51mm x 51mm)

T1005 and T1009: 2-1/4"W x 2"H x 2-1/4"D (57mm x 51mm x 57mm)



Warranty  
2 Year Limited Warranty

- For permanent installations requiring hard wiring

Model	Description	Output Voltage / Power
T1001	Wire-In/UL Transformer	12VAC-20VA
T1005	Wire-In Transformer CSA to UL 1585	16.5VAC-37VA
T1009	Wire-In Transformer CSA to UL 1585	24VAC-40VA



## Bridge Rectifiers

10R1, 10R1-6: 3/16"D x 3/8"Dia. (4.75mm x 9.5mm)

10R3, 10R3-6: 1/4"D x 5/8"Sq. (6.4mm x 16mm)



Warranty  
2 Year Limited Warranty

- Converts non-filtered AC to DC for silent operation
- Shrink-connect leads on -6" leads

Model	Description	Output Voltage / Power
10R1	Rectifier	1A
10R1-6	Rectifier with 6" leads	1A
10R3	Rectifier	3A
10R3-6	Rectifier with 6" lead	3A

# Door Controllers & Peripherals



## Keyscan LUNA SDACSKT Single Door Access Control Smart Kit

Keyscan LUNA is a new comprehensive software package designed to function with Keyscan LUNA solution for small access control installations. One software database can power up to 6 Keyscan SDAC access control units

### Contains:

- One K-SMART3 reader
- 10 K-SECURE 1K credentials
- 1 PS1225 power supply
- Keyscan LUNA software
- Keyscan LUNA comprehensive software brings affordable access control security, accountability, and reporting to small businesses for a fraction of the cost of enterprise systems.
- To begin, simply download Keyscan LUNA software - no charge download from [dormakaba.us](http://dormakaba.us).



## K-SECURE Ten Pack Contactless Secure Smartcard

The Keyscan K-SECURE 1K Series of printable (ISO) style of Contactless Smartcard is equipped with numerous anticounterfeiting and card anti-duplication technologies and a robust AES multilayer encryption technology offering greater security.

- K-SECURE complies with international interoperability (ISO14443) standards for 3rd party applications and is ISO printable.
- They are available in Keyscan 36-bit format for even more security over standard 26-bit 125kHz credentials.



## K-SMART3 Keyscan Smartcard BLE Reader

This Keyscan BLE-ready smartcard reader is a 13.56 high frequency reader that offers users the convenience of using smartcards and the new K-BLE mobile credentials.

- It features additional support for a built-in "heartbeat" that monitors the reader communication advising end-users if any type of optional reader tamper or if the reader cable is cut.
- May not work with non-Keyscan access panels without purchase of optional K-PC2 programming card to disable enhanced features. Suitable for indoor and outdoor applications.
- Keyscan ACU requires System Firmware V 9.39 or higher for use of "extra" features.



## K-SECURE 1K Contactless Secure Smartcard

The Keyscan K-SECURE Series Contactless Smartcard is equipped with numerous anti-counterfeiting and card anti-duplication technologies and a robust AES multilayer encryption technology offering greater security.

- K-SECURE complies with international interoperability (ISO14443) standards for 3rd party applications and is ISO printable.
- They are available in Keyscan 36-bit format for even more security over standard 26-bit 125kHz credentials.
- Also available in 4K memory.

# Door Controllers & Peripherals



## K-SMART3 Keyscan Reader Programming Card

Optional reader read range programming cards may be presented to a properly installed, powered and functioning K-SMART3 reader after power up.

- Card will toggle the BLE read range settings to one of 4 settings - short, medium, long and maximum. Not required for default BLE operation on K-SMART3 readers.
- Works with all Keyscan default K-SMART3 site key readers.



## K-SF-1K Keyscan Smart Fob 1K

The Keyscan K-SECURE series Smart Fob offers the same functionality and high security of the K-SECURE contactless smartcard. .

- It includes the same numerous anti-counterfeiting and anti-duplication technologies as well as the robust AES multilayer encryption technology offering greater security.
- Keyscan smart Fob complies with international interoperability (ISO14443) standards for 3rd party applications.
- They are available in Keyscan 36-bit format for even more security. It is the ideal credential alternative to traditional card credentials.



## SDRA Antenna

Your Keyscan LUNA SDAC communicates via Wi-Fi through an antenna. This replacement SDAC antenna is approved and guaranteed to function with your Keyscan LUNA SDAC.

- Any other antenna purchased from any source may cause damage, unintended results or may not functional at all and will void your SDAC warranty.



## PS1225 Plug in transformer

The PS1225 is a replacement 12VDC plug-in switching transformer for the SDACSKT (SDAC Kit). Plugs into standard 120 Vac outlet and provides up to 2.5 amps. Has 60" of 18 Gauge cable for mounting close to SDAC control. Has 2.1 mm barrel power connector. Center positive.

- For replacement of transformer provided in the SDACSKT.



# Terms & Conditions

---

## Freight

Transportation and handling charges on all goods are prepaid by RCI, and billed back to the customer, unless otherwise specified. Free freight will apply on all orders of US\$4000.00 net or more per purchase order within the continental United States, unless otherwise specified. Carrier to be selected by RCI; air freight and other requested shipments will be at the expense of the customer. Handling is added to freight.

## Product Changes

RCI reserves the right to discontinue models and/or make changes at anytime in materials, parts, components, specification, etc., without notice and without incurring any obligations on models built prior to the change.

## Shortages

A written claim for shortages must be made within 10 days after receipt of the order.

## Templates

Templates are available for all standard products, special templates and wiring diagrams for custom orders are available upon request for a minimal fee.

## Defective Products

Products that exhibit defects in any material and/or workmanship will be replaced by the factory upon verification by a local representative or the technical department at RCI. All returns must be issued a returned material authorization (RMA) number prior to being sent back to our facility. Returns can be done immediately or periodically, depending on the urgency. They will be addressed promptly. Warranty information is available upon request for individual products.

## Cancelled Orders

Cancelled orders are subject to an additional charge. Cancellation will not be accepted of goods that are not regular stock items, such as special orders. Damage Claims – Title passes to the customer upon delivery to the carrier. Loss and damage claims must be filed with the carrier by the customer. Disputes with the carrier do not alter our payment terms and are the responsibility of the customer.

## Credit Balance

Any resulting credit balance on a customer's account for returns or any reason other than RCI's error, must be used as a credit against future purchases. Checks will not be issued to pay off a credit balance, other than due to RCI's error.

## Prices

Orders are accepted with the understanding that they will be billed at prices in effect at the time of shipment, except when firm prices have been quoted. Prices are subject to change without notice.

## FOB

Prices are FOB our warehouse. Upon pick-up by the transportation company, shipments become the property of the purchaser, who assumes the risk of loss or damage in transit.

## Payment Terms

Payment terms are NET 30 DAYS to customers with approved credit. Cash discount terms of 2% - 10 days are available unless otherwise stated. We reserve the right to withhold shipment to accounts that do not meet our payment terms. State sales tax is extra where applicable.

## Returned Goods

Any defects or errors for which RCI is responsible for will be promptly rectified. Returned goods will not be accepted without prior approval and a returned material authorization (RMA) number, which must appear on all documentation relating to the returned merchandise. The original invoice number and purchase order number is required for all returns. All returns must be shipped with freight prepaid. Returned goods are subject to a minimum restocking charge of 20%. There may be additional charges to replace any abused or misused parts or components to restore the product to its original or saleable condition. Time limit for returning merchandise is 30 days after authorization, unless otherwise stated.

## Special Order Returns

Returns of "Special Orders" will not be authorized.

## C.O.D.

While processing a credit application, RCI may require your initial order C.O.D. We reserve the right to make C.O.D. shipments at our discretion.

## Discounts

All discounts are subject to foreign exchange fluctuations, changes in import duties, and other applicable taxes.

## E&OE

Errors and Omissions Excepted.

## Minimum Charge

No minimum charges apply.

## Non standard finishes

Some "non-standard" finishes may come with an added charge. Contact customer service for information prior to order.

dormakaba Canada Inc.  
65 Struck Court  
Cambridge, ON Canada N1R 8L2  
Tel: 800-265-6630  
sales\_RCI@dormakaba.com  
www.dormakaba.us