

## **DWR SERIES**

## PIVOTING WALL RACK WITH FORWARD CAPABILITIES

Pivoting, sectional wall cabinet is ideal for smaller systems in both secured and non-secured areas where space is limited and rear access to equipment is required.

#### **FEATURES**

- DWRs are now equipped with the revolutionary Forward rackrail giving you the ability to use Forward blank panels, vent panels and horizontal cable management. Rear rackrail is optional.
- DWRs now accept patented Lever Lock™ tool free and hardware free internal device and cable management system accessories in the center section and the backpan (with LL-DWR/SR-BP)
- New and improved rackrail brackets not only accommodate Lever Lock™ in the center section but all Forward Drop-In Accessories like vertical cable management and utility lighting.
- 23.5" width
- Available in 17", 22", 26" and 32" overall depths with 15", 20", 24" and 30" of useable depth
- Tool-Free Quick-Mount™ system for easy, one-person mounting of the center section to the backpan on the jobsite
- Center section rear channel accommodates optional slim power to save space, including Select Vertical PDU with RackLink™
- Optional minimum-clearance latch allows side-by-side or interior corner mounting to save room
- Reversible padlockable center section is keyed differently from optional front door for security
- Easily removable laser knockouts accommodate conduit, UHF VHF antennas, Wiremold® 4000 Series raceways, Middle Atlantic Universal Connector Panels, electrical pull-box Grounding/bonding stud in top and bottom of center section and backpan facilitates proper grounding and bonding of electronic equipment, as per NEBS and NEC standards
- Finished in a durable black textured powder coat
- UL listed in the US and Canada
- Seismic certified (when used with DWRSR-ZL latch) with an Importance factor (Ip) value of 1.5







Pivoting Wall Rack







Forward Rackrail

LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

WHAT GREAT SYSTEMS ARE BUILT ON™ | legrandav.com

USA 800.266.7225 av.middleatlantic.support@legrand.com CANADA 888.766.9770 av.middleatlantic.support@legrand.com



# DWR SERIES PIVOTING WALL RACK WITH FORWARD CAPABILITIES

#### **SPECIFICATIONS**

EIA compliant 19" wall mount rack shall be Middle Atlantic Products model # DWR-\_\_- (refer to chart). Overall dimensions shall be 23.4" W x  $\_$  " H x  $\_$  " D (refer to chart). Weight capacity shall be \_\_\_ lbs. Tool-Free Quick-Mount™ system enables one-person installation. Useable depth shall be \_\_\_\_" (refer to chart) and shall extend into the back pan 3.5". Center section and back pan shall be steel, phosphate pre-treated and finished in a black textured powder coat. Adjustable rackrail shall be constructed of 11-gauge steel with two 10-32 threaded holes per side of each marked rackspace, and a cage-nut style mount center hole that is compatible with tool-free Forward Series rackmount accessories. Rack shall be constructed to swing open for component cabling access, center section shall pivot for either left or right opening. Rack shall have a rear knockout panel with 1/2", 3/4", 1", 1-1/2", 2" and 3" electrical knockouts installed in base, and a rear knockout panel with 1/2", 3/4", 1", 1-1/2", 2" and 3" electrical knockouts, and BNC knockouts for UHF/VHF antennas installed in top. Large laser knockout on back pan shall have a 12-1/2" x 12-1/2" cutout for electrical pull-box. Fan knockouts on top and bottom shall allow for installation of up to four 4-1/2" fans. Rack shall have 2" knockouts, 4" knockouts for Wiremold 4000° Series raceways, and knockouts for UCP Series universal connector panels on the side. DWR shall accept patented Lever Lock™ tool free and hardware free internal cable and device management system accessories. DWR Series enclosures shall satisfy the 2013 CBC; 2012 IBC & ASCE 7-10 (2010 Edition) for use in areas of high seismicity, using an assumed Site Class D soil condition with lateral force requirements for protecting 155 lbs. of essential equipment in locations with the highest level of seismicity and top floor or rooftop installations with an Importance factor (Ip) of 1.5 when used with DWRSR-ZL Latch. DWR Series shall be OSHPD approved for fixed equipment anchorage in California healthcare facilities. Rack shall be UL Listed in the US and Canada to the UL-2416 (NWIN) Category when used with optional bonding kit, model # PET-K-\_\_\_. Rack shall be GREENGUARD Gold Certified. Rack shall be manufactured by an ISO 9001 and ISO 14001 registered company. Rack shall be warrantied to be free from defects in materials or workmanship under normal use and conditions for the lifetime of the rack.

#### **OPTIONS**

- Front doors shall be reinforced steel, model # FD-XX (solid), VFD-XX (vented, 25% open area), LVFD-XX (vented, 64% open area), PFD-XX (plexi), (XX= # of rackspaces of DWR rack)
- Lever Lock™ tool free and hardware free internal device and cable management system accessories shall be model
   # LL-XXYY (XX = type, YY = size. Backpan Lever Lock™ kit] shall be LL-DWR/SR-BP
- Keyless Latch replaces keylock, fits front & rear doors, shall be models # LATCH
- Forward real rail kit, 10-32 threaded with center cage nut hole, sold in pairs, hardware included, shall be model # FWD-DWR-RRXX
- Fan kits with two 4-1/2" exhaust fans, fan guards and vent blockers shall be model # DWR-FK17 (fits DWR-xx-17), DWR-FK22 (fits DWR-xx-22), Fan kits with two 6" exhaust fans, fan guards and vent blockers shall be DWR-FK6-26 (fits DWR-xx-26), DWR-FK6-32 (fits DWR-xx-32)
- Vent Blockers used to promote active thermal management, shall be model # VBK-D17 (fits DWR-XX-17), VBK-SD22 (fits DWR-XX-22), VBK-E20 (fits DWR-XX-26)
- Optional cover plate / shelf kit shall be model # DWR-CVR
- Minimum-clearance latch shall allow side-by-side or corner mounting, shall be model # DWRSR-ZL
- Optional bonding kit for UL-2416 (NWIN) compliance shall be Middle Atlantic Products PET-K-D/EWR (for backpan to center section), PET-K-D/EWRD (for backpan to center section to front door), PET-K-FD (for front door to center





PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL.COM/GG UL 2818



EIA/TIA COMPLIANT

US PATENT# 7, 278, 183

SEISMIC CERTIFIED

LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

WHAT GREAT SYSTEMS ARE BUILT ON™ | legrandav.com

 $\textbf{USA} \quad 800.266.7225 \quad \text{av.middleatlantic.support@legrand.com} \quad \textbf{CANADA} \quad 888.766.9770 \quad \text{av.middleatlantic.support@legrand.com} \quad \textbf{CANADA} \quad 888.766.9770 \quad \text{av.middleatlantic.support} \quad \textbf{CANADA} \quad 888.766.9770 \quad \textbf{Av.middleatlantic.support} \quad \textbf{CANADA} \quad \textbf{C$ 



### **DWR SERIES BASIC DIMENSIONS**

- NOTE(S): 1) 17", 22", 26", AND 32" DEEP MODELS ARE REPRESENTED IN THIS DRAWING (DWR-XX-17)/(DWR-XX-22)/ (DWR-XX-26)/(DWR-XX-32) 2) DIMENSIONS ARE IN THE FORMAT IN [MM]
- 2.88 [73] -2X 4 1/2" FAN KNOCKOUTS DWR-XX-17/DWR-XX-22 4X UHF/VHF ANTENNA KO Ø 5/8"-2X 6" FAN KNOCKOUTS-- 2X 2.06 [52] 2X UCP SINGLE MODULE KO-DWR-XX-26/DWR-XX-32 SEE DETAIL A-5.06 [129] WIREMOLD-4000 SERIES RACEWAY (SEE TABLE FOR QTY) — 2X 2.25 [57] **- 16.06 [408]** 1.5 INCH-ELECTRICAL KO (SEE TABLE -2 INCH ELECTRICAL FOR QTY) KO (SEE TABLE CENTER FOR QTY) SECTION -LOCK KEY#: 644 HEIGHT SEE SHEET 2 - 2.25 [57] TYP SEE DETAIL B-- 1.8 [46] TYP SHOWN WITH DWR REAR RACK RAIL KIT FWD-DWR-RRXX [408] SCALE 1/16 -4X 10-32 X .5 GROUNDING/ SCALE 1/16 BONDING STUD CENTER 11.5 [282] 16.5 [419] 20.5 [502] 23.40 [594] SECTION FRONT VIEW, CENTER SECTION └─ 2X 2.06 [52] 26.5 [673] .625 [16] FRONT RAIL -.38 [10] SQ. W/ R.03 [1] CORNERS 5.8 SETBACK [148] 1.25 [32] RACKRAIL TO RACKRAIL 1.75 [44] FITS FORWARD 17.3 [439]/22.3 [567] <del>-</del> 26.3 [668]/32.3 [820] USABLE DEPTH DEPTH, WHEN REAR MOUNTING IS REQUIRED RACKMOUNT OF EQUIPMENT: 15 [381]/20 [508] 24 [610]/30 [762] 10.25 [260]/15.25 [387] 19.25 [489]/25.25 [641] STANDARD CAGENUTS Ø.218 X .800 OBROUNDS #10-32 TAPPED FITS FORWARD CABLE MANAGEMENT AND SMALL DEVICE MOUNTING **PRODUCTS** DETAIL A SCALE 1/2 SCALE 3/8 FORWARD RACKRAIL

#### LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

WHAT GREAT SYSTEMS ARE BUILT ON™ | legrandav.com


USA 800.266.7225 av.middleatlantic.support@legrand.com CANADA 888.766.9770 av.middleatlantic.support@legrand.com



# DWR SERIES BASIC DIMENSIONS

# NOTE(S): 1) 11", 12", 22", 26" AND 32" DEEP MODELS ARE REPRESENTED IN THIS DRAWING (DWR-XX-17) (DWR-XX-22)/ (DWR-XX-26) (DWR-XX-32) 2) DIMENSIONS ARE IN THE FORMAT IN [MM] 0.41 [10]

	OVERALL HEIGHT IN [MM]	CENTER SECTION HEIGHT IN [MM]	RACKING HEIGHT IN [MM]	RACK SPACES	WEIGHT CAPACITY	2" EKO BACK PAN	1.5" EKO BACK PAN	WIREMOLD 4000 SERIES	"A" WIREMOLD 4000 SERIES SPACING	"B" MOUNTING HOLE SPACING	"C" MOUNTING HOLE SPACING HINGE SIDE	"D" KNOCKOUT TOP TO MOUNTING HOLE SPACING	QUANTITY MOUNTING HOLES
DWR-10-17	24.50 [622]	21.63 [549]	17.50 [445]	10 SP	200 lbs	-	-	1	12.25 [311]	19.13[486]	19.13[486]	3.31[84]	4
DWR-10-22	24.50 [622]	21.63 [549]	17.50 [445]	10 SP	200 lbs	-	-	1	12.25 [311]	19.13[486]	19.13[486]	3.31[84]	4
DWR-12-17	28.00 [711]	25.13 [638]	21.00 [533]	12 SP	200 lbs	-	-	1	14.00 [356]	22.63[575]	22.63[575]	5.06[129]	4
DWR-12-22	28.00 [711]	25.13 [638]	21.00 [533]	12 SP	200 lbs	-	-	1	14.00 [356]	22.63[575]	22.63[575]	5.06[129]	4
DWR-12-26	28.00 [711]	25.13 [638]	21.00 [533]	12 SP	200 lbs	-	-	1	14.00 [356]	22.63[575]	22.63[575]	5.06[129]	4
DWR-12-32	28.00 [711]	25.13 [638]	21.00 [533]	12 SP	200 lbs	-	-	1	14.00 [356]	22.63[575]	22.63[575]	5.06[129]	4
DWR-16-17	35.00 [889]	32.13 [816]	28.00 [711]	16 SP	200 lbs	-	-	1	17.50 [445]	29.63[753]	29.63[753]	8.56[217]	4
DWR-16-22	35.00 [889]	32.13 [816]	28.00 [711]	16 SP	200 lbs	-	-	1	17.50 [445]	29.63[753]	29.63[753]	8.56[217]	4
DWR-18-17	38.50 [978]	35.63 [905]	31.50 [800]	18 SP	250 lbs	-	-	1	19.25 [489]	33.13[841]	33.13[841]	10.31[262]	4
DWR-18-22	38.50 [978]	35.63 [905]	31.50 [800]	18 SP	250 lbs	-	-	1	19.25 [489]	33.13[841]	33.13[841]	10.31[262]	4
DWR-18-26	38.50 [978]	35.63 [905]	31.50 [800]	18 SP	250 lbs	-	-	1	19.25 [489]	33.13[841]	33.13[841]	10.31[262]	4
DWR-18-32	38.50 [978]	35.63 [905]	31.50 [800]	18 SP	250 lbs	-	-	1	19.25 [489]	33.13[841]	33.13[841]	10.31[262]	4
DWR-21-17	43.75 [1111]	40.88 [1038]	36.75 [933]	21 SP	250 lbs	2	2	2	10.56 [268]	38.38[975]	19.19[487]	12.94[329]	5
DWR-21-22	43.75 [1111]	40.88 [1038]	36.75 [933]	21 SP	250 lbs	2	2	2	10.56 [268]	38.38[975]	19.19[487]	12.94[329]	5
DWR-24-17	49.00 [1245]	46.13 [1172]	42.00 [1067]	24 SP	300 lbs	2	2	2	10.56 [268]	43.63[1108]	21.81[554]	15.56[395]	5
DWR-24-22	49.00 [1245]	46.13 [1172]	42.00 [1067]	24 SP	300 lbs	2	2	2	10.56 [268]	43.63[1108]	21.81[554]	15.56[395]	5
DWR-24-26	49.00 [1245]	46.13 [1172]	42.00 [1067]	24 SP	300 lbs	2	2	2	10.56 [268]	43.63[1108]	21.81[554]	15.56[395]	5
DWR-24-32	49.00 [1245]	46.13 [1172]	42.00 [1067]	24 SP	300 lbs	2	2	2	10.56 [268]	43.63[1108]	21.81[554]	15.56[395]	5
DWR-35-17	68.25 [1734]	65.38 [1661]	61.25 [1558]	35 SP	300 lbs	2	2	2	10.56 [268]	62.88[1597]	21.00[533]	25.19[640]	6
DWR-35-22	68.25 [1734]	65.38 [1661]	61.25 [1558]	35 SP	300 lbs	2	2	2	10.56 [268]	62.88[1597]	21.00[533]	25.19[640]	6
DWR-35-26	68.25 [1734]	65.38 [1661]	61.25 [1558]	35 SP	300 lbs	2	2	2	10.56 [268]	62.88[1597]	21.00[533]	25.19[640]	6

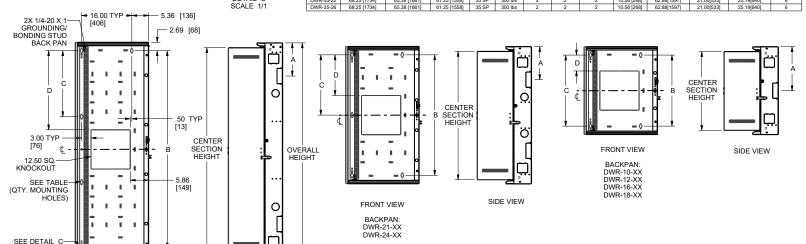

LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

WHAT GREAT SYSTEMS ARE BUILT ON™ | legrandav.com

FRONT VIEW

BACKPAN: DWR-35-XX


USA 800.266.7225 av.middleatlantic.support@legrand.com CANADA 888.766.9770 av.middleatlantic.support@legrand.com

SIDE VIEW

DETAIL C



## DWR SERIES BASIC DIMENSIONS

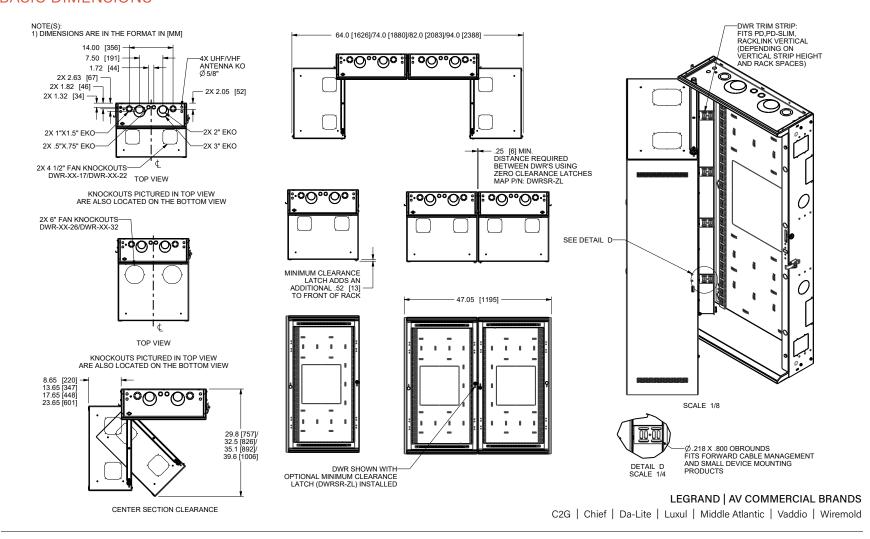


WHAT GREAT SYSTEMS ARE BUILT ON™ | legrandav.com

USA 800.266.7225 av.middleatlantic.support@legrand.com CANADA 888.766.9770 av.middleatlantic.support@legrand.com



# DWR SERIES BASIC DIMENSIONS

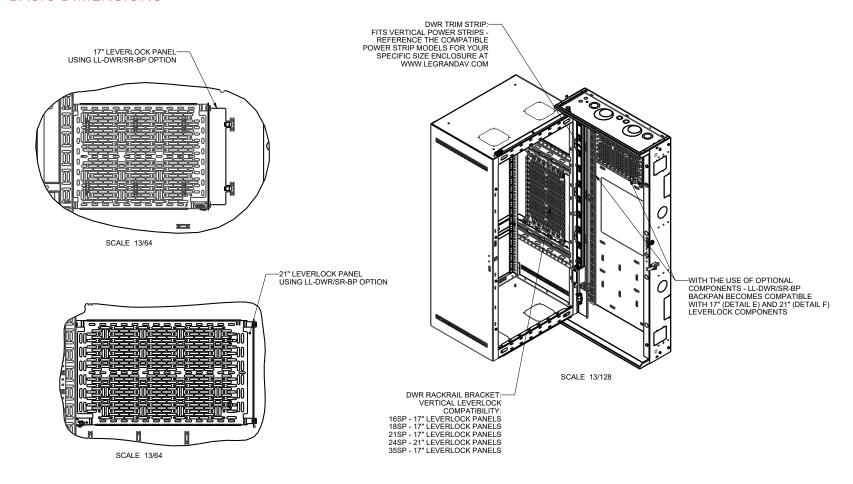

#### LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

WHAT GREAT SYSTEMS ARE BUILT ON™ | legrandav.com

USA 800.266.7225 av.middleatlantic.support@legrand.com CANADA 888.766.9770 av.middleatlantic.support@legrand.com