

LED Strobe Lights

SL-1301-BAQ

The SL-1301-BAQ has a long operating life and 6 programmable flash patterns, making it suitable for several indoor and outdoor applications.


Features:

- Operating life of over 50,000 hours (5.7 years)
- Low maintenance
- 6 Different flash patterns
- IP66 weatherproof rating for indoor or outdoor use
- Flashes like a strobe or rotates like a beacon
- Adjustable flashing speed
- Can be used as emergency strobe or continuous-use warning indicator
- Omni-directional—visible in all directions
- 9-Volt backup battery option for continuous operation

**IP66
Weatherproof**



Dimensions:

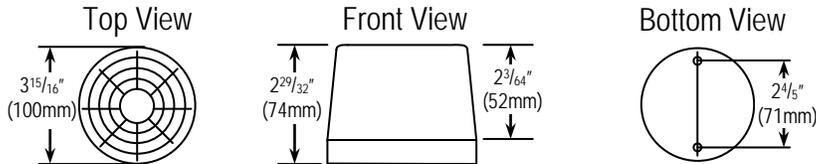

Note: The SL-1301 series LED strobe light has the same dimensions as the SL-126 series strobe light.

Available in 5 Different Colors:

- SL-1301-BAQ/A Amber
- SL-1301-BAQ/B Blue
- SL-1301-BAQ/C Clear
- SL-1301-BAQ/G Green
- SL-1301-BAQ/R Red

Specifications:

		SL-1301-BAQ
# of LED strips		5
Operating voltage	/R	6-14VDC
	/A, /B, /C, /G models	9-14VDC
Current drain		60-200mA@12VDC
Adjustable flashing speed		30-260 flashes/minute
Operating life		Over 50,000 hours
Operating temperature		-4° ~158° F (-20° ~70° C)
Electrical protection		Reverse polarity protection
IP rating		IP66
Backup battery life	Steady ON	Up to 2 hours*
	Strobe/Flashing	Up to 4 hours*

*Estimated



The SL-1301-BAQ has 5 LED strips with 4 LEDs on each strip.

Copyright © 2015 SECO-LARM U.S.A., Inc. All rights Reserved.

The SECO-LARM policy is one of continual development. For that reason SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800

Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI

Flashing Patterns

There are 6 different flash patterns programmable via the DIP switch on the circuit board. Speed is programmed using the control pot.

	Description	Side View	Top View
1	Strobe LEDs flash on and off continuously.		
2	Steady ON All LEDs stay on. Ideal for continuous lighting applications.		
3	Rotate Back and Forth LED groups light up one at a time, rotating clockwise and counterclockwise.		
4	Rotate Clockwise Light rotates clockwise in a circular fashion continuously. (Beacon)		
5	Flash with Progressive ON LEDs turn on progressively clockwise until all LEDs are lit (sweep), and then turn off.		
6	Flash with Progressive ON/OFF LEDs turn on progressively clockwise (sweep), then turn off progressively clockwise.		

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800

Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI



Copyright 2015 © SECO-LARM U.S.A., Inc. All rights reserved.
All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.