

Trove3SS3

Access and Power Integration Solution for Lenel-S2
(S2 Security Platform)



Altronix Trove™ enclosures and backplanes let you easily integrate Altronix power with Lenel-S2 access controllers and accessories. Trove simplifies board layout and wire management, reduces installation time and labor costs.



Trove3SS3

* Boards not included



S2 Security Platform

Trove3 Enclosure + TSS3 Backplane Features

- Accommodates Lenel-S2 (S2 security platform) access controllers with or without Altronix power/accessories:
 - S2-INST.
 - Altronix Power Supplies
 - Altronix Sub-Assemblies
- Includes Altronix Trove3 Enclosure and one (1) removable TSS3 backplane

Agency Listings

UL:

UL294 - Access Control System.

cUL:

CAN/ULC - s319-05 - Electronic Access Control Systems.

CE

European Conformity

Features

- Simplifies board layout and wire management
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit).
 - One (1) double knockout 1.948" (1.5" Conduit) / 1.701" (1.25" Conduit).
 - Sixteen (16) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit).
- Accommodates up to four (4) 12VDC/12AH batteries
 - 16 AWG powder coated steel
 - Includes cam lock, tamper switches and mounting hardware

Dimensions (H x W x D):

36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)

Weights:

Product - 80 lb. (36.29 kg)

Shipping - 92 lb. (41.73 kg)

TSS3 Backplane Features

- Accommodates Lenel-S2 (S2 security platform) access controllers with or without Altronix power/accessories:
 - S2-INST.
 - Altronix Power Supplies
 - Altronix Sub-Assemblies

Backplane features:

- Simplifies board layout and wire management
- 16 AWG galvanized steel

Dimensions (H x W x D):

34" x 28" x 0.3125" (863.6mm x 711.2mm x 8mm)

Weights:

Product - 20 lb. (9.1 kg)

Shipping - 25 lb. (11.74 kg)


Trove3SS3

Access and Power Integration Solution for Lenel-S2
(S2 Security Platform)



Access Controller Position Chart for the Following Models:

Altronix / Lenel-S2 (S2 Security Platform)	Pem Mounting
AL400ULXB2, AL400XB2V, AL600ULXB, AL600XB220, AL1012ULXB, AL1012XB220, AL1024ULXB2, AL1024XB2V, eFlow4NB, eFlow4NBV, eFlow6NB, eFlow6NBV, eFlow102NB, eFlow102NBV, eFlow104NB, eFlow104NBV, Tango1B	(A)
ACM8, ACM8CB, ACMS8, ACMS8CB, LINQ8ACM, LINQ8ACMCB	(B)
ACM4, ACM4CB, LINQ8PD, LINQ8PDCB, MOM5, PD4UL, PD4ULCB, PD8UL, PD8ULCB, PDS8, PDS8CB, PD16W, PD16WCB, VR6	(C)
Lenel-S2 S2-INST	(D)

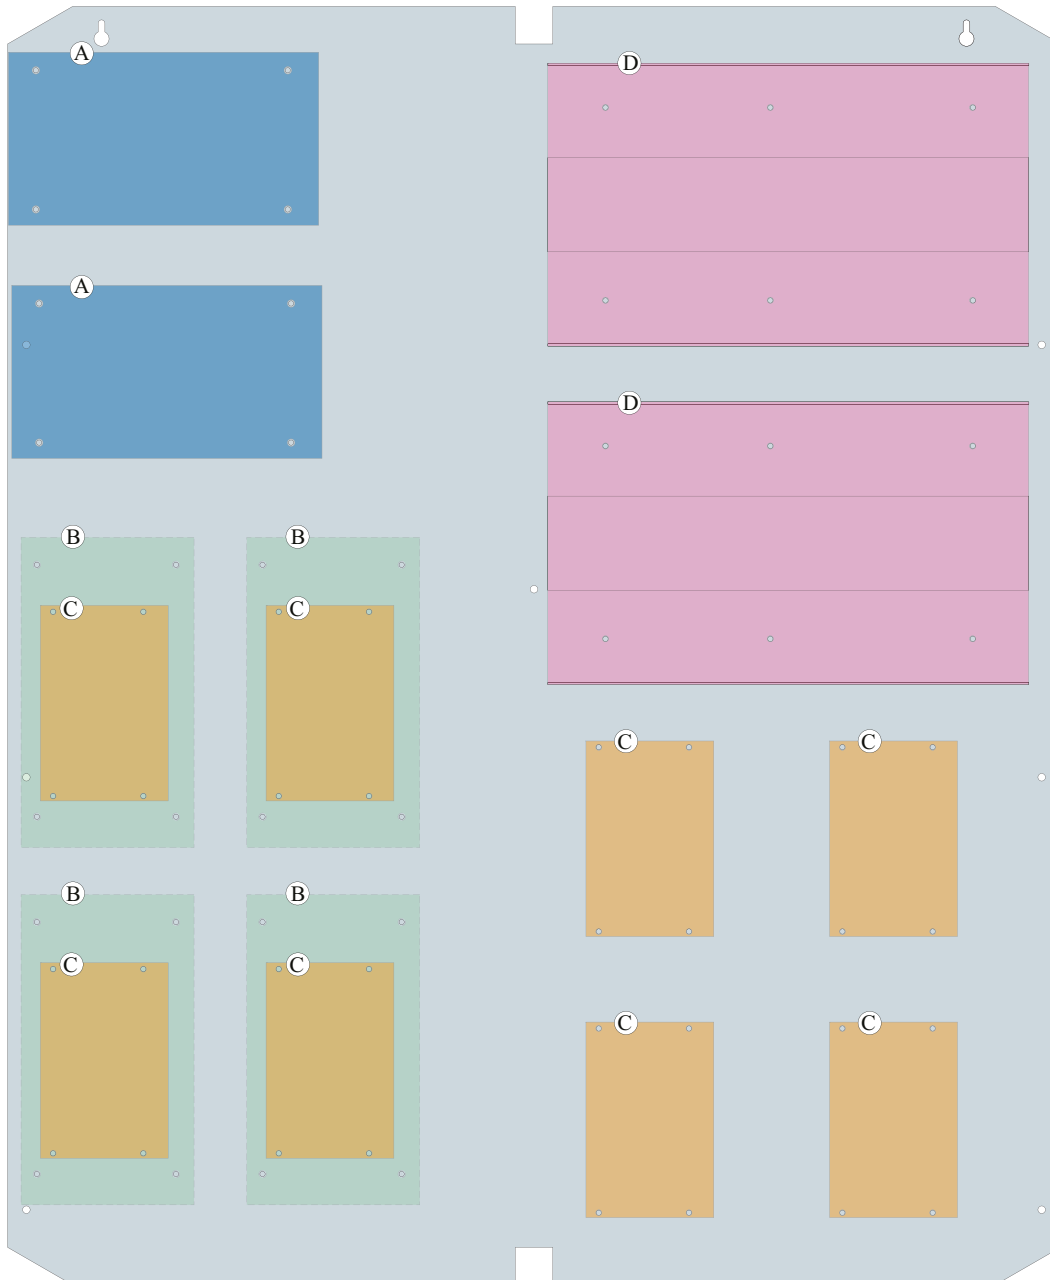

Trove3SS3

Access and Power Integration Solution for Lenel-S2
(S2 Security Platform)

