








# LED Light Kit for EDGE FREE™ Frame Screens

Part Numbers: ZLED84/92/100/110/120/135/150/180/200

## Package contents

A. 72w controller 	B. Power Supply 	C. LED Strip 	D. Power Cord 	E. Remote Control 
--	--	---	---	--

## How to set up your LED kit

1. Lay EDGE FREE™ Frame flat on clean surface (back facing).




2. Remove self-adhesive backing.



3. Adhere LED Strip all around the rear side edge of Frame as pictured. \*




\* For 110" Models - After the LED strip has been applied along the entire rear edge of the frame, there may be excess LED lighting backlighting strip. You are able to remove any excess backlighting strip by simply cutting the strip along the indicated line shown in image below:

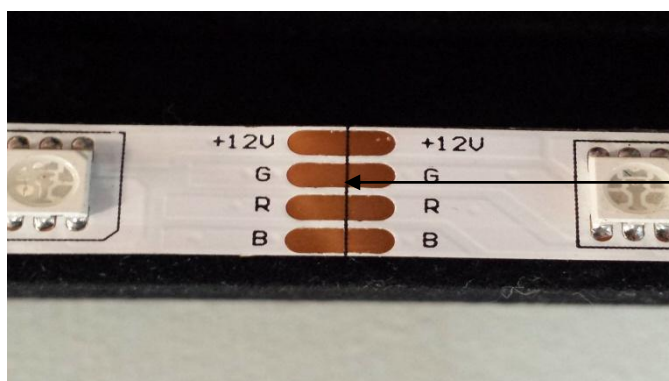

Cut along this line


4. Attach LED kit connections as shown in diagram and plug in the power cord into a wall outlet.

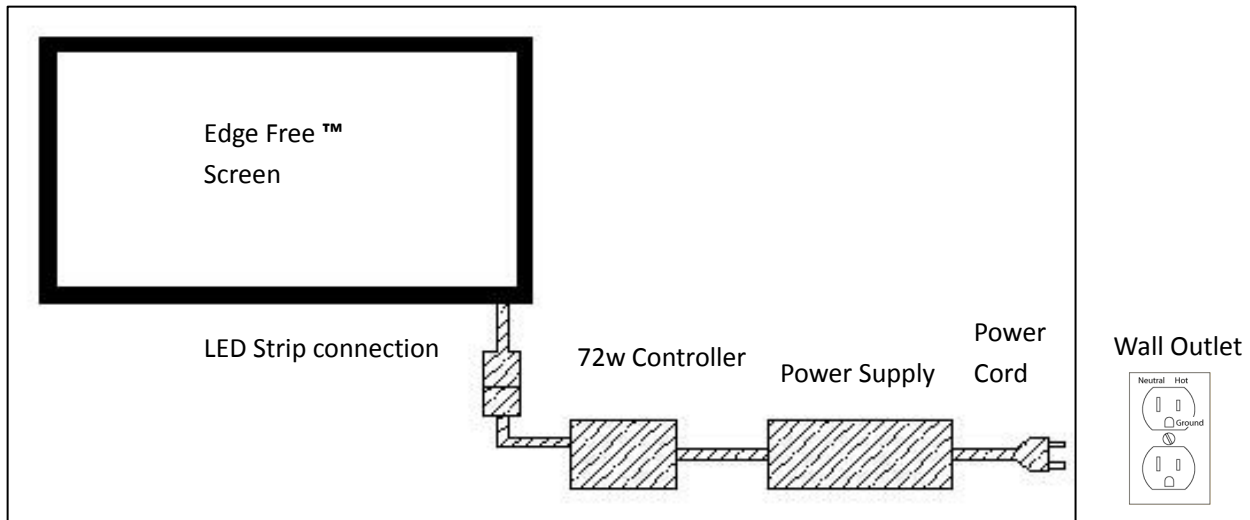

See following pictures for details of connecting the LED kit.

### LED kit connection

1. Connect LED Strip to 72w Controller (align arrows).

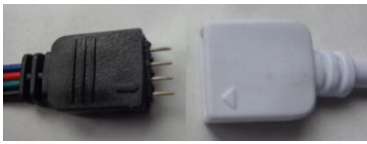

2. Connected.



3. Plug in 72w controller




4. Plug in Power Cord



### Remote Control Operation

1. Remote Control: Infrared
2. Color Mode: 6 static colors, 6 color flash, 6 color fade, 6 color flash + fade
3. Remote Max Distance: 20 feet (6m)



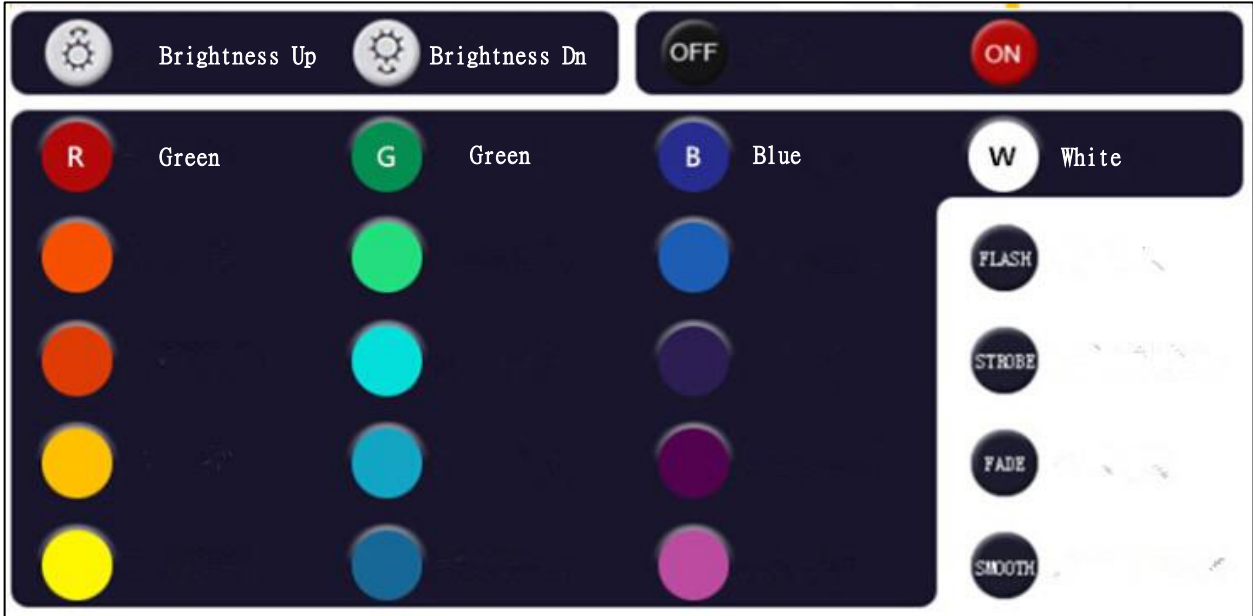

**For a local Elite Screens contact or Technical Support, please visit**

**[www.elitescreens.com](http://www.elitescreens.com)**