

PRIMEX Product Specifications

FTC2 Fiber Transition Case (2nd Generation)

1. SUMMARY

The Primex Fiber Transition Case 2 (FTC2) is a compact, low-profile transition point for storing up to 3' of fiber drop cable and a simplex connector. It's ideal for test points, fiber-to-the-desk, and repair splices within a residence.

This aesthetically-pleasing enclosure conveniently fits over the footprint of standard wall outlets or within a Primex SOHO Pro™ Media Panel. Splice holders and adapter mounts on each side and an externally accessible adapter mount for tight-space applications provides true versatility for FTTH installations.

2. DIMENSIONS


H: 6"/W: 3.3"/D: 0.6"

3. FEATURES & BENEFITS


- Indoor fiber termination case that safely and efficiently stores up to 3' of fiber slack.
- Versatile mounting in either Primex SOHO Pro™ Media Panels or on-wall over a standard gang box or mud ring.
- Low-profile design fits seamlessly into residential settings with minimal visual impact.
- Four simplex fiber adapter, and two splice mounting locations for versatile installation.
- Splice Clip compatible with fusion, ribbon, or mechanical splices.
- Break-off tabs provide flexibility for most FTTH installations.
- Shuttered adapter version allows customer fiber access without opening enclosure.
- Tamper-resistant cover to restrict access.
- Mounting hardware included for media panel or gang box.

4. CONFIGURATIONS

Part #	Part Name	Description
125-1778	FTC2	FTC2 standard
125-1828	FTC2-SA	FTC2 w/SC/APC fiber adapter
125-1827	FTC2-SASH	FTC2 w/angled shutter SC/APC adapter
125-1979	FTC2-SUSH	FTC2 w/angled shutter SC/UPC adapter

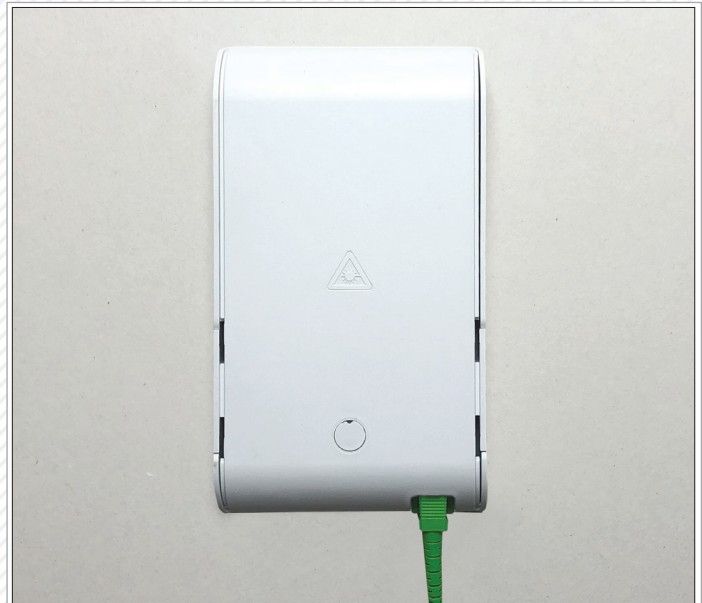

Installs inside MDE

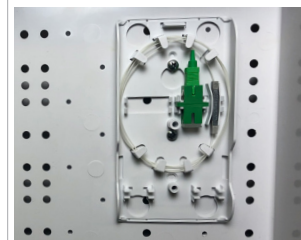


125-1828

Installs on gang box



125-1827

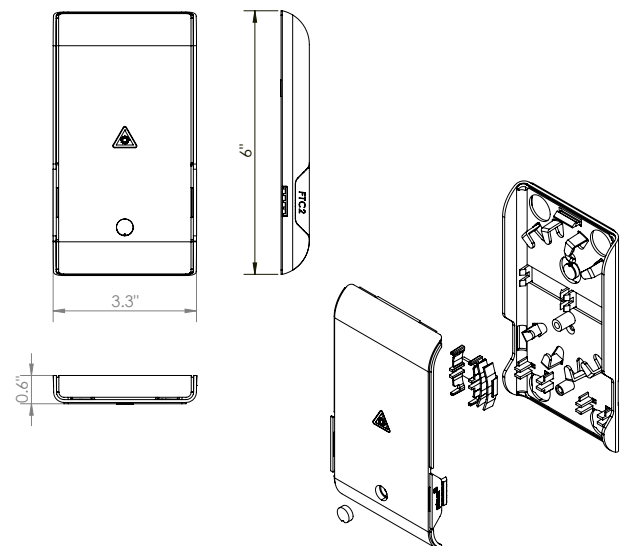

FOR MORE INFORMATION CONTACT:

📞 1.604.881.7875 📠 1.604.881.7835

www.primex.com     

